
JUNE 21, 1979

#### **CLEANING UP SPACE JUNK TO MAKE ROOM FOR SATELLITES/96**

Microprogramming made easier with a writable control store / 121 How design innovation achieved a 1-GHz oscilloscope / 131



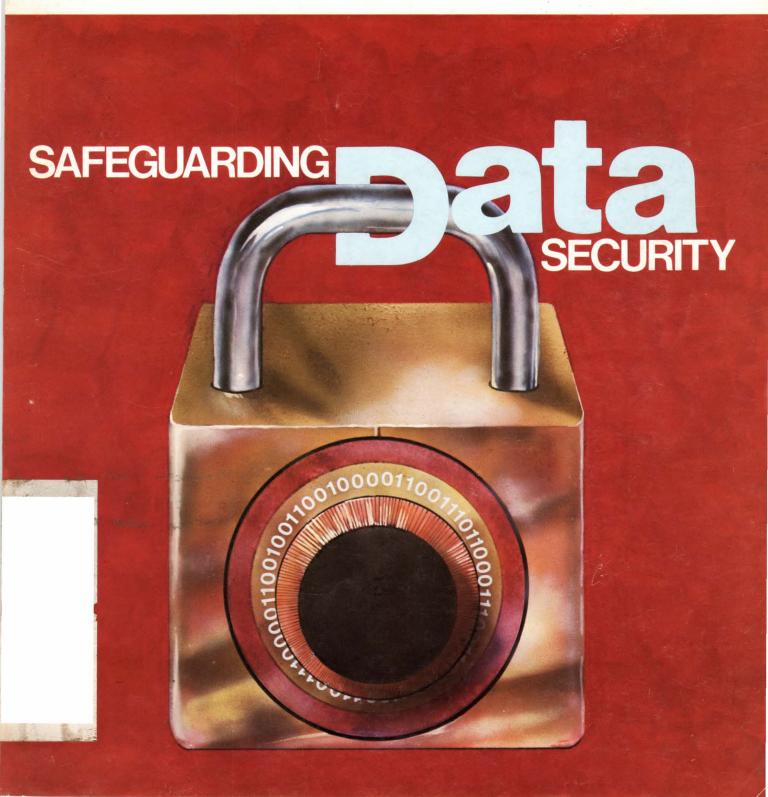


# ACCEPTABLE PRODUCT YIELD IN FINAL TEST—THE BOTTOM LINE FOR A COMBINATION OF IN-CIRCUIT AND FUNCTIONAL TESTING.

In-circuit testing is a powerful test approach. But today's complex products require more than in-circuit testing. Higher and higher PC board yields are required to maintain an acceptable product yield in final testing.

Leverage product yield.

The addition of advanced in-circuit test techniques, together with functional testing, adds that extra increment to your PC board yield as shown below.




For example, in a five PC board product, increasing the PC board yield from 75% to 98% will leverage product yield from 23% to 90%. This can result in substantial savings, since the cost of fault detection increases dramatically with each production step.

#### What is advanced in-circuit testing?

In-circuit testers contact each PC board node through a bed-of-nails fixture. The system switches from component to component and "inspects" for value, placement, etc. Today, the wide diversity of component values, tolerances, components, and interconnections, means that conventional in-circuit techniques often leave some parameters untested.

On the other hand, the HP 3060A Board Test System (\$74,000\* for standard operational system) utilizes advanced techniques that allow component isolation in commonly found but difficult circuit configurations. For example, a .01  $\mu$ F




capacitor can be measured to an accuracy of 4% even when it is shunted by a 1000 Ohm resistor. The key to this measurement is a phase synchronous detector. This is a valuable tool for measuring components and circuits with significant real and reactive characteristics.

#### Functional testing makes the difference.

The standard HP 3060A also has a useful set of analog and digital testing tools. It incorporates board level stimulus/response testing in order that components such as operational amplifiers, DACs and optoelectric devices can be tested. This functional testing permits circuit parameters, such as frequency and period, to be measured and circuit adjustments made. The 3060A's functional testing capability extends to digital pattern, analog and combined circuits. For example, the 3060A can be used to test a D/A converter by applying digital patterns and then monitoring the analog output voltage.

#### At-speed testing of microprocessor boards.

The big news in PC board testing is the microprocessor. Conventional digital testers do not have the massive data storage required to test microprocessors. But the HP 3060A uses an HP developed technique called Signature Analysis to test these microprocessor boards at operating speed. The 3060A collects lengthy bit streams at circuit nodes and converts them to short, four-character hexadecimal signatures. Under test, the bit stream signature at each circuit node is compared to the expected value, making it easy to locate nodes with faulty signatures. This data compression technique makes microprocessor-board testing manageable. Company after company is becoming convinced that HP's signature analysis technique is the right solution to testing microprocessor boards.



#### For complete details.

There are other benefits to PC board testing with the HP 3060A. To get complete details, send for our HP 3060A data sheet, or contact your HP field engineer.

\* Domestic U.S.A. price only

HP Circuit Testers— The Right Decision

099/50



Circle 900 on reader service card



1507 Page Mill Road, Palo Alto, California 94304

For assistance call: Washington (301) 944-5400, Chicago (312) 255-9800, Atlanta (404) 955-1500, Los Angeles (213) 877-1282.

See us at the ATE Show booth #212-216

# SURPRISE!



# HP's Bright New Light Bars are Here!

HP introduces a new way to illuminate your message boldly and brightly with Light Bar Modules. The universal pinout arrangement allows you to connect these Light Bars in parallel, series, or series/parallel configurations. Vary the amount of current, and you can vary your light output to match or contrast with ambient light levels. Available in either High Efficiency Red, Yellow or Green, they are ideal for illuminating legends, as indicators, bar graphs, or for lighted switches.

HP's Light Bar Modules come in two sizes, are X-Y stackable, and flush mounting is easy and convenient. The

HLMP-2300/2400/2500 Series Light Bars are 8.89mm x 3.81mm (.35in x .15in) with prices starting at \$1.15\* in quantities of 1000, and the HLMP-2350/2450/2550 Series measure 19.05mm x 3.81mm (.75in x .15in) with

prices starting at \$1.75\* in quantities of 1000.

For more information or immediate off-the-shelf delivery, call any franchised HP distributor. In the U.S. contact Hall-Mark, Hamilton/Avnet, Pioneer Standard, Schweber, Wilshire or the Wyle Distribution Group (Liberty/Elmar). In Canada, call Hamilton/Avnet or Zentronics, Ltd.



1507 Page Mill Road, Palo Alto, California 94304

For assistance call: Washington (301) 258-2000, Chicago (312) 255-9800, Atlanta (404) 955-1500, Los Angeles (213) 877-1282

# MICROPROCESSORS MADE EASY

HP's new 5036A
Microprocessor Lab is a
50 hour hands-on course
that makes it easy for
you to learn about hardware, software and
troubleshooting—at your
own pace.

HP's new 5036A Microprocessor Lab is designed for self-study or classroom use and allows you to place emphasis on all three basic areas of microprocessors. It comes with a 20-lesson, 454-page textbook and a briefcase-contained microcomputer lab designed to give you maximum "hands on" experience.

#### Hands On Hardware Guides You Through.

You learn rapidly as you study the text, then see the results of the programs you enter on the keyboard, or trace system faults in troubleshooting practice. Extensive system labeling and strategically located LED's make it easy to correlate system behavior with theory for faster and better learning.

#### Software Achieves Two Goals.

The programming lessons let you understand how programs work and teach you to write simple programs. Built-in programs give instructional examples that start you learning quickly.

#### Extends You Into Troubleshooting.

You learn advanced techniques of troubleshooting. The lab and optional troubleshooting tools listed below provide you with the knowledge and hands-on practice you need to trace microcomputer system faults down to the component level. And you can use the optional tools in everyday troubleshooting.

To order the quick and easy course in microprocessors, or for complete information, contact your nearby HP field sales office.

Prices: 5036A Microprocessor Lab, \$800\*; Accessories for Troubleshooting practice are the HP 5024A Logic Troubleshooting Kit, \$625\*; HP 5004A Signature Analyzer, \$990\*

\*Domestic U.S. Prices



#### **Electronics**



The International Magazine of Electronics Technology

Vol. 52, No. 13 • June 21, 1979

#### 39 Electronics Review

PERIPHERALS: Winchester drive comes with its own tape backup, 39 SOLID STATE: Fast RAMs aimed at bit-slice processors arrive, 40 NCC: More new wares than ever at the big show, 41 CONSUMER: Electronic games tripling sales, 42 COMPUTERS: Two heads better than one for Univac, 42 COMPANIES: Intersil looks hard at data acquisition, 44 NEWS BRIEFS: 46 COMPANIES: RCA Solid State at the crossroads, 48 DISTRIBUTED PROCESSING: IBM's software maps multiple routes, 51

#### 69 Electronics International

GREAT BRITAIN: Amorphous Si shows promise for flat-panel LCD, 69 JAPAN: Hitachi, VLSI lab readying E-beam units for 0.5- $\mu$ m lines, 70 GREAT BRITAIN: Microcobol software aims at small businesses, 71 WEST GERMANY: Telecine gains from CCD sensors, digital store, 72 FRANCE: Two-way, 4-km optic cable links TV camera to van, 74

#### 83 Probing the News

PERIPHERALS: 8-inch hard disks off and running, 83 Denser disk drives poised for surge, 86 PERSONAL COMPUTERS: There's life after TI, 93 SATELLITES: Is it time to clean up space? 96

#### 107 Technical Articles

SPECIAL REPORTS: Data encryption discourages data theft, 107 SOFTWARE: Writable control store eases microprogramming, 121 DESIGNER'S CASEBOOK: Converter raises regulator's efficiency, 126 LSI counter simplifies display for a-m/fm radio, 126 Balanced modulator chip multiplies three signals, 129 PACKAGING & PRODUCTION: Innovations unite in 1-GHz scope, 131 CIRCUIT DESIGN: One-chip controller simplifies switchers, 140 DESIGNER'S CASEBOOK: Avoiding latchup in current supplies, 144 Board continuity tester senses only dead shorts, 145 Data-block transfer program is efficient and flexible, 147

#### 157 New Products

IN THE SPOTLIGHT: S-d converter has three-state latches, 157 COMPONENTS: Hybrid circuits match switcher parts, 162 INDUSTRIAL: V-f and f-V converters aim at optical links, 176 MICROCOMPUTERS & SYSTEMS: Software meshes two ICE units, 191 COMPUTERS & PERIPHERALS: Disks driven to long life, 204

#### **Departments**

Publisher's letter, 4
Readers' comments, 6
News update, 8
People, 14
Editorial, 24
Meetings, 26
Electronics newsletter, 33
Washington newsletter, 57
Washington commentary, 58
International newsletter, 65
Engineer's newsletter, 148
Products newsletter, 215
New literature, 218

#### Services

Employment opportunities, 224 Reprints available, 239 Reader service card, 243

#### **Highlights**

#### Cover: Discouraging the data thief, 107

Large-scale integrated circuitry is the best way of implementing the IBM-developed and Government-sponsored data encryption standard. Commercial users like its reasonable cost, and even critics concede the code is reasonably hard to break.

Cover is by Ann Dalton.

#### Thin-film heads double disk density, 86

Ferrite heads seem likely to follow core memories into obscurity, as IBM Corp. and other manufacturers of disk drives switch over to smaller, thin-film types.

#### How to cut microprogramming time, 121

Build a writable control store—a development tool consisting of microprocessorcontrolled random-access memories and capable of communicating with any software development system.

#### The news inside a real-time 1-GHz scope, 131

An upgraded monolithic process, special packages linked by unique connections, and ingenious linear circuit design are all needed to display subnanosecond events without sampling.

#### . . . and in the next issue

First part of a two-part article on field-programmable logic . . . SAW technology surveyed . . . parallel processing in minicomputers: first of two parts.

#### **Electronics**

EDITOR-IN-CHIEF: Kemp Anderson

**EXECUTIVE EDITOR: Samuel Weber** 

MANAGING EDITORS: Arthur Erikson, Gerald M. Walker

ASSISTANT MANAGING EDITORS: Howard Wolff, Alfred Rosenblatt

SENIOR EDITORS: William F. Arnold, Ray Connolly

ART DIRECTOR: Fred Sklenar

**DEPARTMENT EDITORS** Aerospace/Military: Ray Connolly Circuit Design: Vincent Biancomano Communications & Microwave: Harvey J. Hindin Computers: Anthony Durniak Consumer & Industrial: John Javetski Test, Measurement & Control: Richard W. Comerford Microsystems & Software: John G. Posa New Products: Michael J. Riezenman, Packaging & Production: Jerry Lyman Solid State: Raymond P. Capece

CHIEF COPY EDITOR: Margaret Eastman

COPY EDITORS: Mike Robinson, Charlotte Wiggers, Jeremy Young

ART: Charles D. Ciatto, Associate Director Paula Piazza, Assistant Director

EDITORIAL SECRETARIES: Janet Noto, Penny Reitman, Maryann Tusa

EDITORIAL ASSISTANT: Marilyn B. Steinberg

**REGIONAL EDITORS** New York: Benjamin A. Mason (212) 997-2245 Boston: James B. Brinton,

Pamela Hamilton (617) 262-1160 Chicago: Larry Marion (312) 751-3805 Dallas: Wesley R. Iversen (214) 742-1747 Los Angeles: Larry Waller (213) 487-1160 Palo Alto: William F. Arnold,

Bruce LeBoss (415) 968-2712 Washington: Ray Connolly (202) 624-7592 Frankfurt: John Gosch 72-5566 London: Kevin Smith 493-1451 Paris: Arthur Frikson. Kenneth Dreyfack 720-20-70

Tokyo: Charles Cohen 581-9816 McGRAW-HILL WORLD NEWS Editor: Michael Johnson Brussels: James Smith Milan: Jeff Ryser

Moscow: Peter Hann Stockholm: Robert Skole Tokyo: Robert E. Lee

PUBLISHER: Paul W. Reiss

GENERAL MANAGER, DIRECT MARKETING OPERATIONS: Horace T. Howland CIRCULATION MANAGER: Herbert A. Hunter RESEARCH MANAGER: Margery D. Sholes READER SERVICE MANAGER: Frances M. Vallone



#### Publisher's letter

Computer crime, in which a clever thief rips off banks and other institutions by getting the machines to steal, often emerges in the news media as an amusing scam pulled off by an electronics age Robin Hood. But breaking into data files is not a laughing matter—this form of crime is costing millions.

A solution to this problem is data encryption now made possible by the preparation of a national Data Encryption Standard (DES) and the development of data communications equipment to implement the standard. As a result, the market for this equipment and the digital integrated circuits crucial for making data encryption possible is about to explode.

The special report on data encryption in this issue (p. 107) discusses the new standard and how it is being realized. It also describes how the National Bureau of Standards determines that equipment meets the standard before certifying it. Although the chip makers and the hardware producers are off and running, there's still some controversy surrounding the potential for cracking the DES algorithm, according to communications and microwave editor Harvey Hindin.

"The DES appears to be secure for now, but technology will catch up and eventually it may be cost-effective to break the code. It depends on how much the code breaker wants to spend," Harvey explains.

The national campaign to stop litter bugs may have to move into space as well. "The simple fact is we have been slovenly in our satellite programs," Harvey Hindin comments. His probing the news story about space junk (p. 96) underscores that the Skylab crash expected shortly is only one part of the problem.

The junk accumulated over the years and still floating around in space is the main problem. The chances of a newly launched satellite running into the litter are increasing.

Even one of the solutions—sending a space craft to sweep up-has touchy ramifications, says Harvey. It seems the Russians are concerned that a U.S. garbage collector could be used as a cover for a satellite destroyer that would knock out Soviet birds.

#### Wanted: an engineer who

#### wants to be an editor

We have a challenging position available for an electronics engineer who can combine writing ability and technical knowhow into a rewarding career as an editor on Electronics magazine in New York. Candidates should have a BSEE and some design experience. We offer excellent salary and fringe benefits. Send your résumé to the Executive Editor, Electronics, 1221 Avenue of the Americas, New York, N.Y. 10020.


June 21, 1979 Volume 52, Number 13 102,593 copies of this issue printed

Electronics (ISSN 0013-5070). Published every other Thursday by McGraw-Hill, Inc. Founder: James H. McGraw 1860-1948. Publication officer 221, Mrc. Founder: James H. McGraw 1860-1948. Publication officer 221, Mrc. Founder: James H. McGraw 1860-1948. Publication officer 221, Mrc. Founder: James H. McGraw-1860-1948. Publication officer 221, Mrc. Founder: James H. McGraw-1810 publication of the State of the

Vice-Presidents: James E. Hackett. Controller: Thomas H. King, Manuscutring; Robert L. Leyburn, Circulation; John W. Patten, Sales; Edward E. Shirimer, International E. Shirimer, Inte

Postmaster: Please send form 3579 to Fulfillment Manager, Electron ics, P.O. Box 430, Hightstown, N.J. 08520.

# Searching for signals buried in noise?

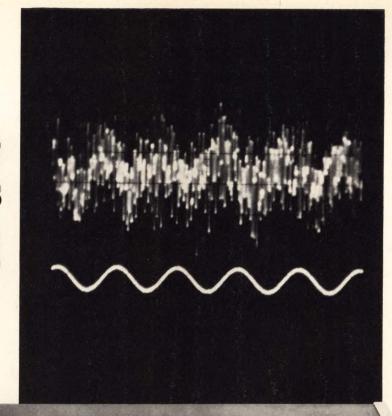



## New narrow band filter finds and tracks them automatically

Krohn-Hite's New Model 3800 Narrow Band Tracking Filter can find and lock on a signal below 100 kHz and track it automatically. With or without an external frequency reference. Even if it's buried 10 dB below the background noise level. And the Model 3800 costs only \$1,995.

#### Other features include:

- Bandwidth variable from 1 kHz down to 0.001 Hz
- Filter Q to 100,000,000
- Automatic gain control with 70 dB dynamic range

For immediate information call us at (617) 580-1660.

# KROHN-HITE

Avon Industrial Park, Avon. MA 02322 • [617] 580-1660 TWX 710 345 0831

SALES OFFICES: AL., Huntsville (205)534-9771; AZ., Phoenix (602)279-1531; CA., Inglewood (213)674-6850, San Jose (408)292-3220; CO., Denver (303)773-1218; CT., Canton Center (203)693-0719; FL., Orlando (305)894-4401; GA., Atlanta (404)455-1206; HI., Honolulu (808)941-1574; IL., Chicago (312)283-0713; IN., Carmel (317)844-0114; KS., Overland Park (913)649-6996; LA., Gretna (504)367-3975; MD., Towson (301)321-1411; MA., Wakefield (617)245-5940; MI., Detroit (313)961-3042; MN., Minneapolis (612)835-4818; MO., St. Louis (314)569-1406; N.M., Albuquerque (505)255-2330; N.J., Cherry Hill (609)482-0059, Englewood (201)871-3916; N.Y., Rochester (716)473-5720, Syracuse (515)437-6666, Vestal (607)785-9947; N.C., Burlington (919)227-3639; OH., Chesterland (216)729-2222; Dayton (513)294-2476; OK., Jenks (918)299-2636; OR., Portland (503)297-2248; TX., Dallas (214)661-0400, Houston (713)688-1431; UT., Salt Lake City (801)466-8729; VA., Falls Church (703)573-8787; WA., Bellevue (206)454-3400; WI., Milwaukee (414)545-8400; CANADA, Montreal, Quebec (514)747-9747, Ottawa, Ontario (613)725-1931, Toronto, Ontario (416)275-2270.

## Introducing...



#### new line of toroidal inductors

The new Series 2020 incorporate the stability of a toroidal winding on an iron core in a small size. All molded package configuration. The shielded design conforms to MS Spec #21422. Ruggedly constructed with heavy tinned copper radial leads, they are ideal for P.C. and all designs when stable inductive performance is essential. Available in 25 inductance values from .10 to 10.00 microhenries. Prototype quantities with current ratings up to 2200 milliamps are available for prompt delivery. Bulletin 2020-C has all the facts. Ask for your copy.



**Delevan Division** 



270 QUAKER RD., EAST AURORA, N.Y. 14052 TELEPHONE 716/652/3600 TELEX 91-293

OTHER DIVISIONS & SUBSIDIARIES INCLUDE:
APITRON, BASCO, DUSTEX, AMERICAN PRECISION
INDUSTRIES (U.K.) LTD., DUSTEX OF CANADA, INC.

#### Readers' comments

#### Dangerous but useful

To the Editor: With respect to "Unspecified 8085 op codes enhance programming" by Dehnhardt and Sorensen [Jan. 18, p. 144] and the subsequent letter by Reich [Readers' Comments, March 15, p. 6], I agree that it is dangerous to use operating codes that are not fully supported by the manufacturer. Nevertheless, some of the codes discovered by Dehnhardt and Sorensen rectify some long-standing weaknesses of the 8080 and 8085, particularly with respect to 2's complement numbers, and perhaps should be supported by the manufacturer.

In the article, the authors suggest no useful function for the flag bit designated X5. It does, however, provide a very useful function—namely, the true sign of the result when the operands of an addition, subtraction, or comparison are 2's complement numbers.

The current 8085 instructions, such as JP (jump on positive) and JM (jump on minus), test the apparent sign of the result and not the true sign. This can lead to serious programming errors, since the branch may be opposite to what is expected.

The true sign of the result is given by V  $\oplus$  S, where V is the 2's complement overflow indicator and S is the apparent sign of the result.

In addition, the V flag is not available in the standard 8085 and would be difficult to compute. Also, the trap on overflow instruction (RSTV) discovered by Dehnhardt and Sorensen is clearly very useful. Finally, the instructions JX5 and JNX5 perform the functions "jump on less than zero" and "jump on greater than or equal to zero," respectively.

M. R. Ito Vancouver, Canada

#### Correction

The photograph printed along with the story on Irwin Federman, president of Monolithic Memories Inc., Sunnyvale, Calif. (May 24, p. 14) was not that of Mr. Federman. Instead, it was that of Charles L. Wood, president of Electronic Arrays Inc., Mountain View, Calif. (see p. 14 of the June 7 issue).

# Now available from RCA: The 5101 RAM in plastic and at plastic prices.

Just look at the table. The prices speak for themselves.

And this 5101 is the fastest you can get. 250 ns access at  $10\mu$ A leakage, plus a range of other speed/leakage

values. And they're available fast, from stock. At any participating RCA Solid State Distributor.

#### In-use simplicity.

These RAMs have separate data

Туре	Leakage μΑ	Access time, ns	Voltage V	Temperature range, °C	Price 1000+
MWS5101EL-1	10	250	5	0 to +70	5.19
MWS5101EL-2	50	250	5	0 to +70	3.88
MWS5101EL-3	200	350	5	0 to +70	2.94
MWS5101EL-8	500	450	5	0 to +70	2.84


inputs and outputs. The outputs are TTL compatible. And there are two Chip-Select inputs for easy system expansion.

For immediate delivery contact your RCA distributor.

For more information, contact your local RCA Solid State Distributor.

Or contact RCA Solid State headquarters in Somerville, New Jersey. Brussels, Belgium. Tokyo, Japan.



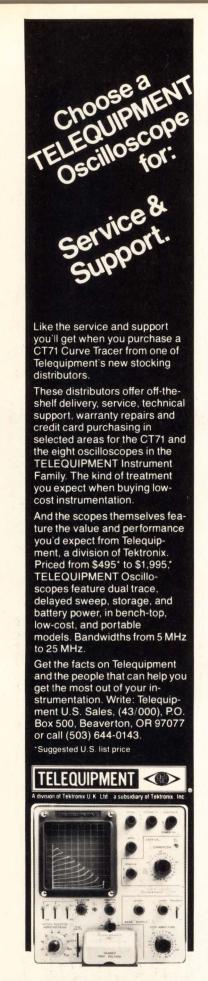

For Technical Data circle #8 on Reader Service Card For Demonstration circle #245 on Reader Service Card

#### **News update**

■ It is clear that one of the more important lithography systems of the 1980s for integrated circuits will be the step-and-repeat reduction-projection mask-to-wafer aligner. Still, when a company that is based in the tiny central-European nation of Liechtenstein announced a very advanced wafer stepper [Electronics April 12, p. 110], some skeptical eyebrows were raised, particularly those of that firm's competitors.

The company is Censor Inc. and its \$450,000 machine is called the SRA-100. The specifications of the 10:1 stepper include resolution of 1 micrometer, autofocus, and autoalignment. Also, the SRA-100 boasts through-the-lens alignment at each step to give a registration accuracy to within ±0.2 µm at a 2-sigma probability. Throughput is 60 4-inch wafers per hour. The company also said that the first SRA-100 will be assembled at its Reno, Nev., plant in time to be demonstrated at Semicon West in 1980.

It appears that, for the time being at least, Censor is confounding its doubters. Werner Tabarelli, president, says, "We already have firm orders for two machines and options on six more. We plan to assemble the first five machines in Europe and then shift to assembly in the new Reno plant."

On the road. Tabarelli's firm has now passed several important milestones in the assembly of its first machine. For instance, an autoalignment accuracy to within less than 0.1 µm has been demonstrated. Also reached, he says, is the 60-wafersan-hour throughput total. Finally, a temperature stabilized (±1°F) reticle storage system capable of holding 15 units and a precision wafer chuck also have been constructed and demonstrated. Life tests are currently being run on all the drive motors for positioning the various components of the system.

Two important milestones are due to be reached at the end of the year. In October, Carl Zeiss and Co. is scheduled to deliver a 436-nanometer light source and, in December, an ultraprecise lens system for the SRA-100. -Jerry Lyman

#### # telkoor.

Koor Electric & Electronics Ltd. development and production of sophisticated electronic products including military power supplies military microwave communications military taperecorder military & civilian altimeters automatic self blood pressure tester

announces the merger of:

Koor Systems Ltd.

Penguin Electronics Ltd.

Meeda Electronic Industries Ltd.

effective April, 1979 and shall operate under the name TELKOOR LTD. TELKOOR LTD P.O.B. 76,

Petah Tikva, Israel Telex: 341993 MAAC IL-Tel. 03-903661-2-3

Circle 246 on reader service card

#### COMPUTER IMAGE PROCESSING

**Short Course** 

August 13-17, 1979

RENSSELAER POLYTECHNIC INSTITUTE

Engineers and computer scientists who are now using or intending to use computer image processing in their

PROGRAM

Applications pplications

Remote sensing of material resources from aerial and satellite images, map data processing, robot "vision" for automatic assembly, automatic inspection, computerized tomography, and biomedical image processing and medical imagery.

 Techniques covering but not limited to: Computer representation of images Segmentation and edge detection Thresholding and pixel classification Line-drawing representation, coding, and analysis Scene analysis and image understanding Object reconstruction from multiple images Image coding and compression Image enhancement Optical and optical-digital image processing

To register or for more information, please mail the following

# OFFICE OF CONTINUING STUDIES RENSSELAER POLYTECHNIC INSTITUTE TROY, N.Y. 12181 (518) 270-6442

(	) Register me for the Computer Image
	Processing Short Course
(	) \$495 enclosed
(	) Will pay at registration
(	) Send more information

Name	
Position	
Company	
Street	City
State	Zip

Circle 247 on reader service card

# Presents the NEW DEC 11/03-L Systems



FLOPPY 11V03-L

Standard 11/03-L systems are available as 1 Megabyte Double Density Floppy Disk based or



HARD DISK 11T03-L

10 Megabyte Hard Disk Cartridge based RT-11 systems.



These systems are available with choice of LA36, VT52 or VT100 as consoles.

#### **DON'T WAIT!**

# With FIRST Computer's "EXCLUSIVE" BUYER PROTECTION PROGRAM

You can buy tomorrow's computer system—TODAY!

#### BUYER PROTECTION PROGRAM

SYSTEM MODEL SERIAL NO. DATE PURCHASED

This Certificate entitles

located at

to priority allocation for the purchase of one (1) of the following LSI-11/23 upgrade Processor/Memory options:

1. KDF11-HH

LSI-11/23 with 96KW

\$5250

2. KDF11-HF

LSI-11/23 with 64KW

\$3850

3. KDF11-HD

LSI-11/23 with 32KW

\$2450

This option must be exercised by submission of written Purchase Order within thirty (30) days of receiving written notification by Certified Mail at the above address of the availability of product by First Computer Corporation.

Priority allocation of the new LSI-11/23 Processor/Memory option will be assigned solely on the sequence of the receipt of valid Purchase Orders as evidenced by the numeric sequence of the above Certificate Number. Expired options will be voided thirty-one (31) days after written notification is tendered by Certified Mail. The cost of this option is non-refundable and in no case will expired options be reinstated.



This option is applicable to all purchases of PDP-11/03 (SRVXxxx-xx) packaged systems purchased from First Computer Corporation between the period April 1, 1979 and December 31, 1979 inclusive. This option must be ordered on the same Purchase Order as the packaged system by specifying the following:

1. KDF11-XX LSI-11/23 Upgrade Option \$300.00

<sup>™</sup> Registered trademark of First Computer Corporation




TWX NUMBER 910-651-1916

#### computer corporation

corporate square/825 north cass avenue/westmont, illinois 60559/(312) 920·1050

Registered trademark of Digital Equipment Corporation, Maynard, Mass.

"THE 8086 IS AN ARCHITECTURAL TRIUMPH!"

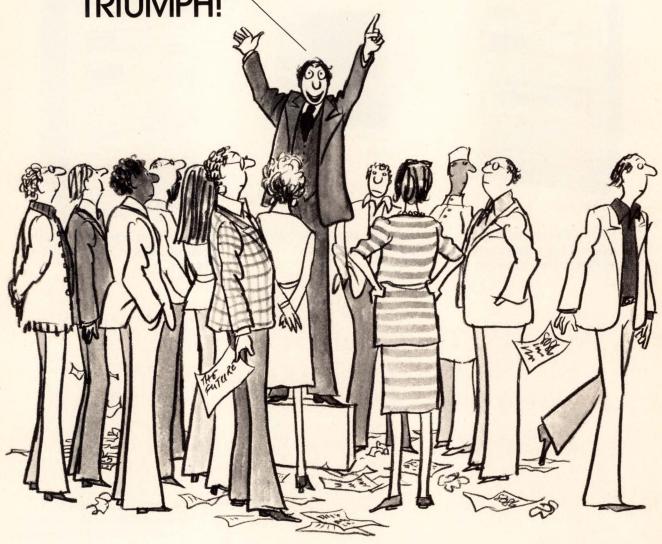

There's certainly been a lot of talk about the 8086. Trouble is, Intel's been doing all the talking.

They've told you everything you could ever want to know about the 8086. Except the most important thing.

The 8086 isn't the best 16-bit CPU.

The AmZ8000 is.


The AmZ8000 has a more advanced, more powerful, much more flexible architecture than the 8086. It has more addressing modes, more general purpose registers, more

powerful instructions. It can even accommodate more data types. It has better I/O capability, larger addressing spaces, and a lot higher throughput using standard NMOS than the 8086 using HMOS.

What about support? Glad you asked.

Our new System 8/8 was designed especially for the AmZ8000. It beats Intel's MDS hands down.

System 8/8 speaks four languages fluently including PASCAL and COBOL. MDS doesn't. System 8/8 has a multi-master bus

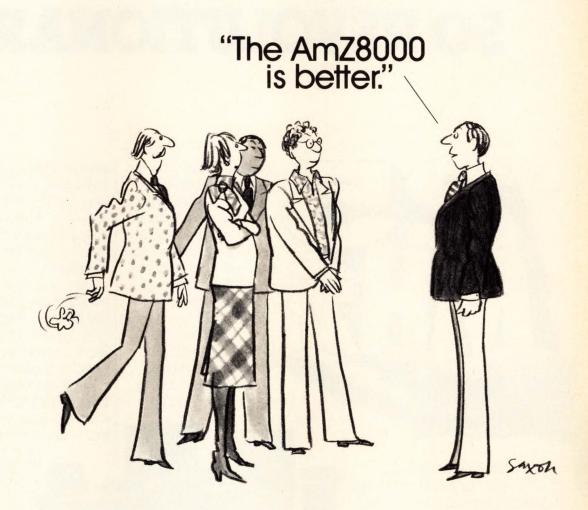

structure which allows it to interface with both 8- and 16-bit processors. MDS doesn't. System 8/8 has an arithmetic processor. MDS doesn't. And System 8/8 has a much more powerful text editor than MDS.

One last thing: We know it hurts to drop Intel for someone else. We've just been through it ourselves. But it's going to hurt a lot more two years from now. By then your competitors could be so far ahead of you, you might never catch up.

Call Advanced Micro Devices and we'll send you everything we've got on the AmZ8000. Or come to one of our 4-day seminars.

Once you've compared the AmZ8000 with the 8086, you'll know what we know. The AmZ8000 is the best 16-bit CPU there is.

And that's not just talk.

## Advanced Micro Devices 27

901 Thompson Place, Sunnyvale, CA 94086 · Telephone: (408) 732-2400

# **NOT SINCE DARWIN** HAS AN EVOLUTION BEEN SO REVOLUTIONARY.

software base. This is part of Fairchild's commitment to protect your software investment. That's a big savings when you consider that 75% of your total testing cost is software-related.

The 5582 can handle functional and parametric testing and can be used in both engineering and production. It can test up to four

Fairchild's Xincom 5582 25 MHz memory test system is a revolution in semiconductor testing. The 5582 is designed to test the new generation of RAMs and ROMs that require cycle times down to 40 ns, pulse widths of less than 10 ns, and corresponding fast rise and fall times.

What makes the 5582 so revolutionary is the fact that it's really an evolution. It's the latest in a long line of Xincom memory test systems. Like all Xincom systems, it's based on proven distributed architecture. And unlike most new systems, it won't solution to your high-speed make you suffer through long, expensive software development. That's because it's fully compatible with the existing Xincom III by the largest service and support

devices in parallel or can be used with one or two test heads in a time-multiplexed mode.

The Xincom model 5582 gives you a true 25 MHz. It has no limitations or compromises that reduce test speed. Its fully digital timing system gives you inherently stable and accurate pulse definition. The 5582 is the testing needs for today and for tomorrow.

The Xincom 5582 is backed

team in the industry. Worldwide training. Over 20 major field service centers in the U.S., Europe and Asia. And a global network of applications specialists to help you get the most from your Fairchild system.

No one else has such an evolutionary 25 MHz memory test system. And no one else can offer as thorough support. But then, no one else has such a good reputation to maintain.

For more information about the Xincom 5582 25 MHz memory test system, just contact your nearest Fairchild sales

office today. Or write Test Systems Group, Fairchild Camera and Instrument Corporation, 1725 Technology Drive, San Jose, Calif. 95110. Tel: (408)

998-0123. TWX: 910-338-0558.

FAIRCHILD

**TEST SYSTEMS GROUP** 

first family





#### LOW COST HIGH RELIABILITY REFLECTIVE OBJECT SENSORS

New, low cost OPTRON solidstate reflective object sensors offer high reliability for noncontact sensing applications.

OPTRON's new high reliability OPB 708 and OPB 709 reflective object sensors provide excellent performance for non-contact sensing applications at an inexpensive price.

The OPB 708 is a plug-in replacement for the TIL139 reflective object

sensor.

The new OPTRON devices combine a high efficiency solution grown gallium arsenide infrared LED with a silicon N-P-N phototransistor (OPB 708) or maximum sensitivity photodarlington (OPB 709) in a molded plastic package. The photosensor senses radiation from the LED only when a reflective object is within its field of view.

With a LED current of 40 mA and with the OPB 708 positioned 0.150 inch from a reflective surface, typical output current is  $50\mu$ A for a 90% diffuse reflective surface and 1.0 mA for a specular reflective surface such as aluminum foil. Under similar operating conditions, the output current of the OPB 709 is 7.5 mA and 100 mA.

Both devices are ideally suited for such non-contact sensing applications as paper or card edge detection, motor speed controls, EOT/BOT sensing, and proximity detection.

The OPB 708 and OPB 709 as well as other low cost, high reliability reflective object sensors are immediately available from stock. Custom versions are available on request.

Detailed technical information on the OPB 708 and OPB 709 reflective object sensors and other OPTRON optoelectronic products...chips, discrete components, optically coupled isolators, and interrupter assemblies... is available from your nearest OPTRON sales representative or the factory direct.



#### **People**

# O'Donnell heads Litton division handling program for Saudis

Even in the middle of today's boom, a near-\$300-million-a-year electronics operation that springs up overnight receives attention. And Litton Industries' new Data Command Systems division in Calabasas, Calif., created just last month to handle a \$1.64 billion program for Saudi Arabia, is already attracting equipment suppliers on the scent of \$600 million in contracts.

"Our procurement group is very popular," drily observes Thomas M. O'Donnell, the veteran military electronics executive tapped to be the division's president. With nearly 20 years spent marketing Litton's command and control systems, he is one of the best-known (and best-liked) figures in a particularly tough field, where R&D bugs and spiraling costs conspire to chew up managers.

Five years. But O'Donnell denies the "instant nature" of his division, pointing out that five years of preparation and selling to the Saudis went into getting the contract. A turn-key project for command, control, and communications, it is intended to automate all Saudi air defense, making it into a single countrywide net, and to serve civilian purposes as well. "This means we design, buy, integrate, install, and test it, besides training Saudi nationals to run it," says O'Donnell.

What pleases him and the corporate brass is that the new division does not have to manufacture a thing. Instead, it will buy state-ofthe-art hardware. The only Litton equipment slated for use is a sister division's AN/TSO-73 missile controller. Other major pieces are radar, a troposcatter long-range communications system, and radio gear for each of six regional centers to cover all of Saudi Arabia, an area as big as the United States east of the Mississippi River. "It will not only serve air force needs, but those of the entire government," O'Donnell says. "We're putting in 72 channels and can also handle television."

Most of the design work is done.



**Contractor.** With \$600 million in contracts, Thomas O'Donnell's division is popular.

"Staffing is the initial hurdle," he says. He will hire key deputies from other Litton divisions, but with 100 engineers and technicians needed by July 1, and 400 at the peak of the six-year program, he has to attract more people quickly. About 300 will be sent to Saudi Arabia, to which O'Donnell expects to travel 6 to 10 times a year.

#### At Bell, Penzias seeks new computer interfaces

The typewriter is an outmoded machine that many find difficult to use, says Arno A. Penzias, newly appointed executive director of the Research, Communications Sciences division of Bell Laboratories. Thus, one of the important tasks undertaken by the computer systems research laboratory, one of four division laboratories Penzias oversees from his office in Crawford Hills, N. J., is to find a better way of communicating with computers.

"It takes no genius to know that everything is going digital, so we must get closer to computers," says the 46-year-old 1978 Nobel laureate. "The problem is the human-to-machine interface—it's a bottle-neck."

Penzias has a message here that is applicable to almost all electronics research: simply improving technology in a vacuum is not enough. "We have to start studying human beings," he says.

Verbal communication with com-

# COMPARE YOUR IDEA OF A WORKHORSE RECORDER TO OURS.

The rugged Gould 105 General Purpose Strip Chart Recorder delivers such reliable performance, with so many unexpected features, that it goes beyond the traditional definition of a workhorse unit.

Die-cast to handle the day-to-day rigors industrial analytical instrumentation must face, the 105 still offers you a full complement of features you might not expect on such a competitively priced recorder.

Full scale linearity is 99.9%. Rectilinear data presentation is available in either single or dual 10-in. channels. Response time (10% to 90% full scale) is less than 350 ms.

The Model 105 uses disposable felt tip pens avail-

able in four colors. It easily takes Z-fold or roll paper without modification. Chart speeds range from 1 in./hr. to 20 in./min. It even makes chart annotation simpler with a flatbed, "write-on" design and event marking standard.

And of course you have the Gould sales and service organization should you ever need us. Check Gould's 105 — a workhorse of a recorder with a tradition of thoroughbreds.

For a detailed brochure, contact Gould Inc., Instruments Division, 3631 Perkins Ave., Cleveland, Ohio 44114. Or call toll free at (800) 325-6400, Ext. 77. In Missouri: (800) 342-6600.



#### **People**




**New factor.** Electronics will change the keyboard-display boundary, says Penzias.


puters is far from reaching the desired level of precision, he says. One division at Bell is working on such problems as speech recognition and speech synthesis by computers. But despite the extremely complex work the researchers are doing, computers remain capable of only the simplest recognition tasks, according to Penzias.

This comes as no surprise, given the complexities of speech recognition. "If people can't get my name right . . . ," says the Hungarian-born scientist, leaving the hazards it poses for a voice-recognition system to the listener's imagination. "So for a long time we'll be 'typing' to communicate with computers—but it doesn't have to be on typewriters."

And what will replace the typewriter? The key, Penzias thinks, may be to blur the "distinction between keyboard and display. The boundary is one that electronics will change." Something along the lines of the flat display and the flat keyboard of the latest hand-held calculators may be an answer, he conjectures.

Besides the computer systems lab, the 18-year Bell veteran oversees the radio, guided-wave, and electronics labs, which have about 200 researchers. He will combine his own research in radio astronomy with administrative duties. His Nobel prize was for his 1964 discovery, with co-worker Robert Wilson, of residual microwave radiation from the cosmic explosion that formed the universe.

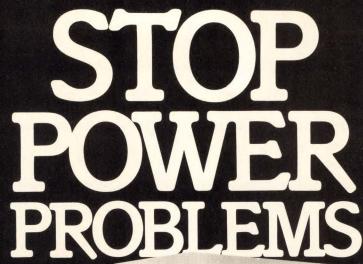

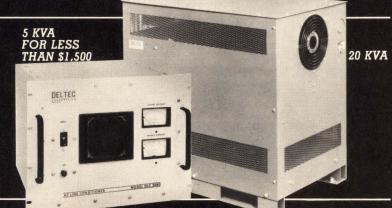

Conditions power for your computer by providing regulation and noise rejection.

Only One Computer Power Conditioner Eliminates <u>All</u> Noise Problems.

Noise on a computer power line causes data and memory loss as well as mysterious crashes and errors. This noise can pass through voltage regulators and dedicated power lines.

Deltec DLC Series computer power conditioners eliminate noise and regulation problems. Unique shielding provides 120 dB (1,000,000:1) reduction for: Transients — Voltage Spikes — Ground Loops — Line Noise caused by RFI or EMI (radiated noise).

RANGES: 1200VA - 30KVA 1¢;
9KVA - 90KVA 3¢, 50 and 60Hz.

AC POWER HANDBOOK

AC POWER HANDBOOK

...gives you hard answers on how to solve AC

SOLUTIONS

AND SOLUTIONS

THE DLC provides voltage

effencies greater than 90%

regulation within 3% over a

30% input voltage range with

... gives you hard answers on how to solve AC Power problems. Now available at our cost of \$3.00. Write or call for a copy.

DELTEC

C O R P O R A T I O N 980 Buenos Ave., San Diego, CA 92110. Telephone (714) 275-1331

UL LISTING PENDING.

16



Of course, a defective sensor isn't the only thing that can put a race car out of commission.

But a sensor you can count on is one less problem to worry about. For solid state sensors in the automotive industry, MICRO SWITCH is first. For quality, reliability and performance.

Maybe that's why our Hall effect vane sensors are used in

Cosworth powered Formula I race cars.

And the Chrysler Corporation specifies MICRO SWITCH solid

state sensors for ignition systems on the Omni and Horizon.

Of course, we have sensors for many other applications, too. Like computer peripherals, office copiers, medical instrumentation and home appliances. Just to name a few.

So, if your plans call for solid state sensors, get the ones that leave all the others behind. For more details, and the location of our sales offices and distributors around the world, write MICRO SWITCH, The Sensor Consultants. Or call 815-235-6600.




FREEPORT. ILLINOIS 61032



# INTRODUCING "SLAVE COMPUTING".

Finally. An innovative alternative to multi-processing.

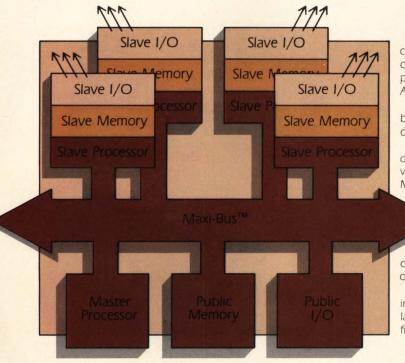

There is a powerful difference between slave computing and multi-processing. A slave computer comes with its own memory and I/O. And it operates in parallel with the host processor. On the same bus. And with minimal software headaches.

So we've implemented this concept with our brand-new 4/10S (the "S" stands for slave) to work with our NM4 and LSI-2 as masters.

We made sure the 4/10S is well-equipped to do just that. A private, 32K byte RAM memory. Four private I/O ports. A real-time clock. An extended NAKED MINI 4 instruction set. Plus, full access to its master's memory and peripherals.

Working in parallel with a master, up to four 4/10S computers can process all kinds of off-loaded tasks. Like communications protocol jobs. Process control work. Even complex calculations. All without slowing down the hosts' own processing chores.

And our system's software makes it easy to implement. Contact Computer Automation for the labor-saving details. With good help getting harder to find, you can't beat it. Not even with a whip.




WHERE OEM'S COME FIRST.


18651 Von Karman, Irvine, California 92713 • Telephone: (714) 833-8830 TWX: 910-595-1767

Or contact any of our local offices: Santa Ana, CA • Santa Clara, CA • Denver, CO • Orlando, FL • Atlanta, GA • Bensenville, IL • Waltham, MA • Livonia, MI • Bloomington, MN • Bloomfield, NJ • Greensboro, NC • Cincinnati, OH • N. Olmstead, OH • King of Prussia, PA • Pittsburgh, PA • Nashville, TN • Dallas TX • Houston, TX • Bethesda, MD Norfolk, VA • Bellevue, WA • Toronto, Canada.

Circle 19 on reader service card

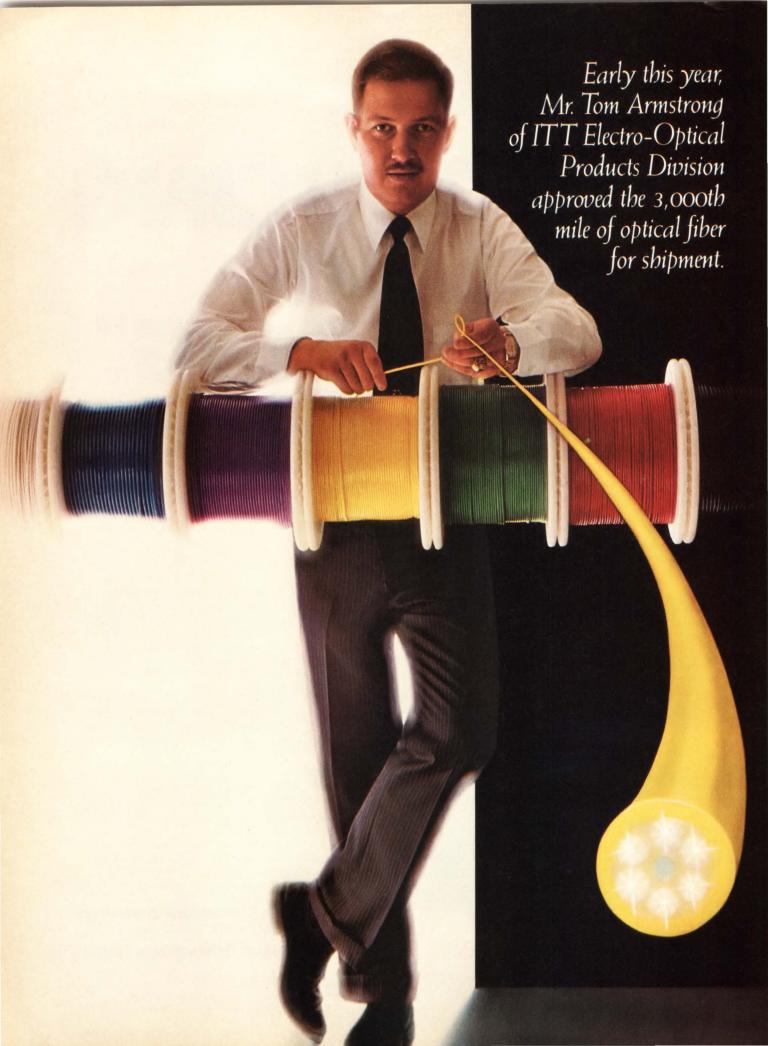

It's one aspect of ITT's total optical fiber communications systems capability.

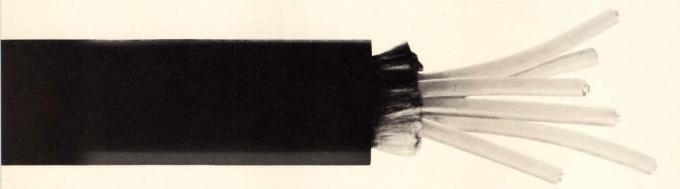

As our Quality Control Engineer, Mr. Armstrong is responsible for checking the quality of not only our fiber and cable, but of every optical component we make. Like so many before it, that milestone 3,000th mile went into the completion of another of the numerous complete systems built by ITT. To meet our standards, it had been proof tested over its entire length at 100,000 psi or greater to ensure high strength for ease of handling and assured long term durability.

For some time now, ITT has been able to supply design and application engineers with every fiber optic component their work requires. For two good reasons: First, we've had the lead time—our involvement with fiber optics communications goes back to 1964, when ITT's Dr. Charles Kao first

established their theoretical feasibility. Secondly, ITT recognized early that fiber optics represented a revolution in communications, and committed its resources to implementing it.


If you need star, tee, directional or bidirectional couplers, light sources and detector packages, electro-optical transmitter or receiver modules, connectors, or connector and splice installation equipment, we have them ready for you. And, if you want assis-

tance with a complete telecommunications system, or new computer, industrial, or military application, write to our Director of Marketing on your letterhead.

Imagine what we can do together.

ELECTRO-OPTICAL PRODUCTS DIVISION TTTT

7635 Plantation Road, Roanoke, VA 24019

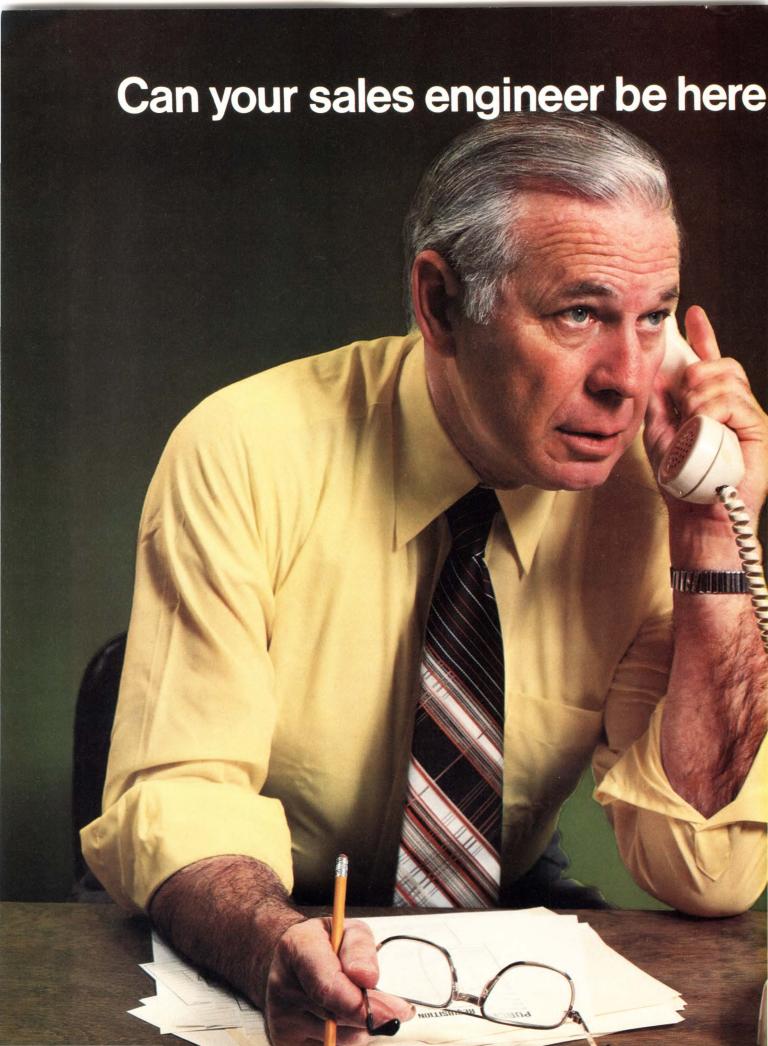

# tomorrow?

# When it's TRW, the answer is yes.

When you consider that TRW has over 250 people in more than 50 sales offices nationwide, with factory engineering and marketing staffs to help them, you can understand how we can make that statement.

TRW recognizes that service, before and after the sale, is as important as consistent quality and competitive prices. When you need help, or an answer in a hurry, we'll get it to you.

When you want "yes" for an answer, call your TRW distributor, TRW/ECD sales office or Renfrew Electronics in Canada.

You'll find them listed in EEM, Gold Book, Electronics Buyers' Guide, Who's Who in Electronics, the Electronics Industry Telephone Directory and the Electronic Buyers' Handbook.

TRW CAPACITORS
TRW CINCH CONNECTORS
TRW CINCH-GRAPHIK
TRW CINCH-MONADNOCK
TRW ELECTRONIC FUNCTIONS
TRW GLOBE MOTORS
TRW HOLYOKE WIRE & CABLE

TRW INDUCTIVE PRODUCTS
TRW IRC NETWORKS
TRW IRC RESISTORS
TRW LSI PRODUCTS
TRW OPTRON
TRW POWER SEMICONDUCTORS
TRW RESEMICONDUCTORS

TRW ELECTRONIC COMPONENTS

DIVISIONS OF TRW INC.

#### **Editorial**

#### Privacy: the undoing of computers?

At the National Computer Conference held recently in New York, it was easy to sense the robust nature of the business and the feeling that this is where it's at these days—"it" being the leading edge of technology, the powerful determining force in electronics.

But now is a good time, before the glow wears off, to take a look at what society thinks of computers. Like it or not, computers have become so pervasive that the public in general and law makers in particular have become concerned and even alarmed about the misuse of computing power, with its attendant invasion of privacy.

There is a good reason for this concern. In fact, according to Alan F. Westin, professor of public law and government at Columbia University, computer company executives seem even more worried about the abuses of computer power than the public. A nationwide survey conducted by Louis Harris and Associates of New York for Sentry Insurance Co. showed them to be—though more willing than the public to accept the need of organizations to collect information - more convinced than the public that Americans surrender their privacy when they apply for credit or open a charge account. What's more, computer executives strongly reject the notion that those who complain about invasion of privacy have something to hide.

In short, the Sentry survey indicates that computer executives are ahead of the public in recognizing the dangers of unchecked use of computers. They are also more willing than the public to insist, at least verbally, on new policies or laws to protect privacy in the private sector—many want detailed and comprehensive legislation now. But very few of them are willing to guarantee immediate privacy protection—against outside credit checks, for instance—for their own employees, before legislation requires it. This last point suggests a disturbing dichotomy.

For if the computer producers who have done such an impressive job of developing and marketing data processing are ahead of the public in recognizing the social dangers, why are they not in the forefront of devising protection? Though they understand the computer data base better than the general public or the Congress, they seem reluctant to act on their better instincts.

There are good reasons for the computer industry to take the lead in privacy protection. For one, no one knows what kind of legislation lawyers in Washington might get into the books if they do not have some kind of technical guidance from the industry.

But the most significant revelation of the survey is that public attitudes toward computer technology are a direct reflection of attitudes toward the institutions making use of this technology. This should be a warning to the computer industry, as well as to computer users and would-be policy makers. In this day of general distrust—of the Federal Government, the oil industry, and so on—hostility toward institutions is being directed at the computers they operate. Many feel that technology is out of hand and that Orwell's 1984 has already come to pass.

It is in the best interests of the leaders of the computer industry to take this fact into account and to do their best to clarify these overlapping issues. Otherwise, public reaction may well demand restrictions on computers. As Westin points out, "such orientations will not be easily changed by better communications campaigns or patchwork privacy laws."

Westin suggests the need for "new mechanisms of individual participation and protection in the use of organizational data systems, especially the automated ones and the large networks." No one yet knows what these steps might be. But it behooves the computer makers to continue discussing the problems and to seek the solutions.

# OHIO SCIENTIFIC DOES IT AGA

Ohio Scientific has taken its standard Challenger III computer and married it to the new Shugart 29 Megabyte Winchester Drive. The result is the C3-C. This new microcomputer now fills the vacuum that existed for computer users who need more mass storage capability than floppies can offer - yet until now, could not justify the additional cost of a larger capacity hard disk computer such as our C3-B 74 Megabyte disk system.

#### Winchester Technology

Winchester hard disk drives offer small business and professional computer users the logical solution to mass storage problems that are beyond the capability of floppy disks. In addition, Winchester

disks feature a track seektime that is much better than floppies and because they spin at eight times the rate of floppies, Winchesters have a shorter latency. Both of these points reflect one remarkable speed advantage Winchester disks have over floppies.

#### Coupled to the Challenger III Computer

Ohio Scientific's award winning Challenger III computer is a classic. It is the only computer series that utilizes the three most popular microprocessors - 6502A, 68B00 and Z-80. This tremendous processor versatility enables one to utilize a seemingly endless selection of quality programs available from Ohio Scientific's software library as well as from many independent suppliers.

#### **And Advanced Software**

For instance, there are single user, multi-user and network operating systems. A complete turnkey small business package, OS-AMCAP provides accounts receivable, accounts payable, disbursements, cash receipts, general ledger, etc. OS-CP/M offers a complete FORTRAN and COBOL package. And there is WP-2, a complete word processing system. For information management, OS-DMS, features an advanced file handling system and program library that simplifies information storage and recall and routinely performs tasks which usually require special programming on other systems.

#### Yields the Microcomputer of the Future

With an eye toward the future, the C3-C, like all other Challenger III's was designed with provisions for future generation 16 bit microprocessors via plug-in options.

There are ten open slots for lots of I/O and multiuser operation. Truly, the Ohio Scientific C3-C is a computer with a future.

## The new C3-C computer with 29 Megabyte Winchester Hard Disk.



# THE BENCH-TYPE DMM'S FROM SOAR . . . THEY FIT YOUR BUDGET AND ALL OF YOUR NEEDS. High accuracy, dependability, five function modes, 3½ and 4½ digit displays, auto rang-

ing, automatic zero adjustment, automatic polarity indication, battery operation or optional AC to DC adapters—these are just some of the features that make SOAR's bench-type DMM'S different and better.

Take our MC-545. It's priced below \$290, and it measures DC voltages to 1000 V, AC voltages to 750 V, DC and AC current to 1000 mA, and resistance to 20 meg. Maximum indication is 1999 or —19999. It also comes with an optional BCD output (8, 4, 2, 1) for connecting the multimeter between a CPU and a digital recorder.



And then we have the top of the line—the MC-546. It has most of the features of the 545 plus auto ranging.

**4MC-546** 

If a  $3\frac{1}{2}$  digit display satisfies your requirements, consider the MC-535 or MC-536. They have HI-LO Ohm switches for all ranges, and prices start at \$199.95.

MC-536



To get the full story, call or write for a free catalog on SOAR's entire line of dependable and economical test instruments.



SOAR ELECTRONICS (U.S.A.) CORP. 200 13TH AVENUE RONKONKOMA, NEW YORK 11779 TEL. (516) 981-6444/TELEX 144638

Circle 26 on reader service card

#### **Leaders in Electronics**

The only reference devoted solely to biographies of the most influential people in electronics

• corporate executives • technical managers • designers and developers • government and military officials • academics • editors/publishers • securities analysts • trade/professional group directors • consultants...plus an 80-page index of biographees by affiliation.

Prepared by the staff of **Electronics** magazine. 5,240 biographies. 651 pages, clothbound. \$39.50

<b>Electronics Magazine Books</b>	
P.O. Box 669, Hightstown, NJ 0	8520
(609) 448-1700, ext. 5494	

Send me \_\_\_\_\_copies of Leaders in Electronics @ \$39.50 plus applicable sales tax. McGraw-Hill pays regular shipping and handling charges on pre-paid orders.

Payment enclosed	☐ Bill firm	☐ Bill m

Name		-
Company		
Company		

Street

City State Zip

Signature

#### Meetings

Annual Conference on Nuclear and Space Radiation Effects, IEEE and University of California at Santa Cruz, to be held at the university, July 16–20.

Second Joint Intermag—Magnetism and Magnetic Materials Conference, IEEE and American Institute of Physics, Statler Hilton Hotel, New York, July 17–20.

Video and Data Recording Conference, IEEE et al., University of Birmingham, Birmingham, England, July 17–20.

Computers in Manufacturing Conference, American Institute of Industrial Engineers (Santa Monica, Calif.), Jack Tar Hotel, San Francisco, July 30-Aug. 1.

IECEC—Intersociety Energy Conversion Engineering Conference, IEEE, Sheraton Boston Hotel, Boston, Aug. 5-10.

Pattern Recognition and Image Processing Conference, IEEE, Hyatt Regency O'Hare Hotel, Chicago, Aug. 6-8.

Siggraph '79—Sixth Annual Conference on Computer Graphics and Interactive Techniques, Association for Computing Machinery (New York), Hyatt Regency O'Hare Hotel, Chicago, Aug. 6–10.

Conference on Simulation, Measurement and Modeling of Computer Systems, National Bureau of Standards *et al.*, University of Colorado, Boulder, Colo., Aug. 13–15.

International Conference on Parallel Processing, IEEE, Shanty Creek Lodge, Bellaire, Mich., Aug. 21–24.

23rd Annual International Technical Symposium and Exhibit, The Society of Photo-Optical Instrumentation Engineers (Bellingham, Wash.), Town and Country Hotel, San Diego, Calif., Aug. 27–30.

Compcon Fall '79—18th IEEE Computer Society International Confer-

# 64KROMs. The cold, hard facts.

The cold, hard facts about 64K ROMs add up to proven performance. A level only Mostek's MK36000 has achieved with features like efficient program code turnaround, design superiority and volume production.


Since its introduction in early 1978, Mostek's 64K ROM has easily become the industry standard. And here are the facts to prove it.

#### Fact 1:

Mostek has processed more than 200 codes with an average delivery of just seven weeks for customer prototypes after data verification.

#### Fact 2:

Its compatibility with EPROMs and RAMs provides exceptional system design flexibility.



#### Fact 3:

Even late-comers can't match the 36000's fast access time of 250ns (max) or low power of 220mW (max) active and 35mW (typ) standby.

#### Fact 4:

The MK36000 has been in volume production for over a year, with demonstrated ability to meet delivery commitments.

#### Fact 5:

Mostek can accept code input by EPROMs, ROMs, card decks, paper tapes or magnetic tapes with no delay in generating verification data.


#### Fact 6:

The MK36000 is available in a full range of speeds, operating temperatures and processing options, including strenuous military specifications.

The fact is, you can get promises from a lot of people. But when you want the leading 64K ROM all the facts point to Mostek.

Write to 1215 West Crosby Road, Carrollton, Texas 75006. Or call 214/242-0444. In Europe, contact Mostek Brussels; Phone (32) 02/660.25.68.

#### MOSTEK.

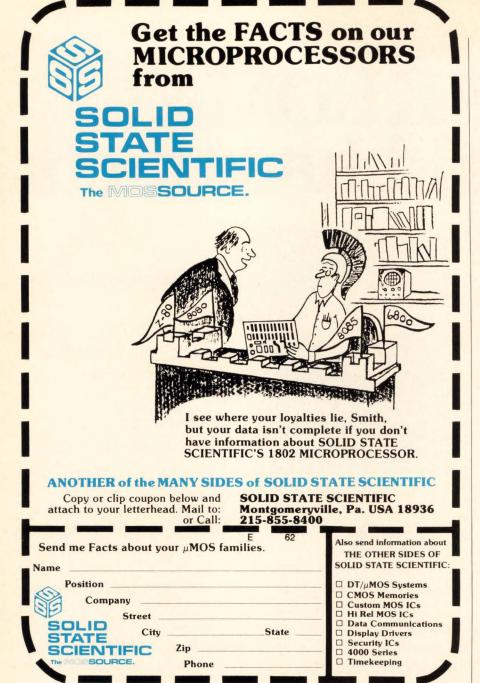

College dollars need time to grow.



Take stock in America.

With higher paying U.S. Savings Bonds

**Meetings** 

ence, IEEE, Capital Hilton Hotel, Washington, D. C., Sept. 4-7.

Second International Fiber Optics and Communications Exposition, Information Gatekeepers Inc. (Brookline, Mass.), Hyatt Regency O'Hare Hotel, Chicago, Sept. 5-7.

25th Annual Holm Conference on Electrical Contacts, Illinois Institute of Technology (Chicago), Palmer House, Chicago, Sept. 10-12.

Dielectric Materials, Measurement and Applications Conference, Institution of Electrical Engineers (London), University of Aston, Birmingham, England, Sept. 10-13.

Fall Conference of USE Inc., USE Inc. (the organization for those who use Sperry Univac's series 1100 computers, Bladensburg, Md), Diplomat Hotel, Miami, Fla., Sept. 10-14.

Ninth European Microwave Conference, Institution of Electrical Engineers (London), The Brighton Centre, Brighton, Sussex, England, Sept. 17-21.

Wescon/79 Show and Convention, IEEE and Electronic Conventions Inc. (El Segundo, Calif.), Brooks Hall and St. Francis Hotel, San Francisco, Sept. 18-20.

Autotestcon-Automatic Support System for Advanced Maintainability Conference, IEEE, Radisson Hotel, Minneapolis, Sept. 19-21.

Telecom '79-Third World Telecommunications Exhibition, International Telecommunications Union, Palais des Expositions, Geneva, Sept. 20-26.

Short courses\_

Pascal Programming for Mini and Microcomputers, The Ramada Inn, Woburn, Mass., Aug. 13-17 and Oct. 22-26. For information, contact Prof. Donald D. French, Institute for Advanced Professional Studies, One Gateway Center, Newton, Mass. 02158, or telephone (617) 964-1412.

# Mostek's 16K EPROM. When you need it fast.

# Fast performance!

Mostek has established another performance standard with the MK2716 EPROM. Pin compatible with other 5V only 16K EPROMs, it features a fast access time of 350ns (max). From Mostek, you get the high performance and greater design flexibility required in high speed microprocessor systems.

For slower applications, our 2716 is available in other standard speed selections. MK2716-6 (350ns), MK2716-7 (390ns), MK2716-8 (450ns), and MK2716-12 (650ns).

A compatible family. Mostek's Wide-Word Memory Family includes RAM and ROM that are pin compatible with the 2716. All the memory you need, for any system configuration, is available from Mostek, 1215 West Crosby Road, Carrollton, Texas 75006; phone (214) 242-0444. In Europe, contact Mostek Brussels; phone (32) 02/660.69.24.

# Fast delivery!

For fast memory or just memory—fast, contact your local Mostek distributor.

Advent Electronics Cedar Rapids, IA Indianapolis, IN

Arrow Electronics Ann Arbor, MI Baltimore, MD Dallas, TX Doraville, GA Edina, MN Farmingdale, NY Ft. Lauderdale, FL Hamden, CT Kernersville, NC Kettering, OH Moorestown, NJ Oak Creek, WI Palm Bay, FL Reading, OH Saddlebrook, NJ Schaumburg, IL Solon OH Sunnyvale, CA

Bell Industries Albuquerque, NM Chicago, IL Denver, CO Salt Lake City, UT Sunnyvale, CA

Woburn, MA

Cramer Electronics Gaithersburg, MD Rochester, NY Syracuse, NY

Diplomat Southland Tampa, FL

Ft. Wayne Electronics Ft. Wayne, IN

Graham Electronics Indianapolis, IN

Hammond Electronics Greensboro, NC Greenville, SC

Intermark Electronics San Diego, CA Santa Anna, CA Sunnyvale, CA

Kierulff Electronics Billerica, MA Chicago, IL Denver, CO Los Angeles, CA Palo Alto, CA Phoenix, AZ Fairfield, NJ Salt Lake City, UT St. Petersburg, FL San Diego, CA Seattle, WA Tustin, CA

Lionex Corp. Boston, MA Woodbury, NY

Olive Electronics
St. Louis, MO

Preico Electronics Montreal, Canada Ottowa, Canada

Toronto, Canada

Quality Components Austin, TX

Dallas, TX Houston, TX R.A.E. Industrial

Vancouver, Canada
Schweber
Electronics


Atlanta, GA Beachwood, OH Bedford, MA Danbury, CT Horsham, PA Houston, TX Irvine, CA Livonia, MI Rochester, NY Fairfield, NJ Westbury, NY


Semiconductor Specialists Kansas City, MO

Sterling Electronics Austin, TX Dallas, TX Houston, TX Metairie, LA Tulsa, OK

W.E.S. Ltd. Winnipeg, Canada



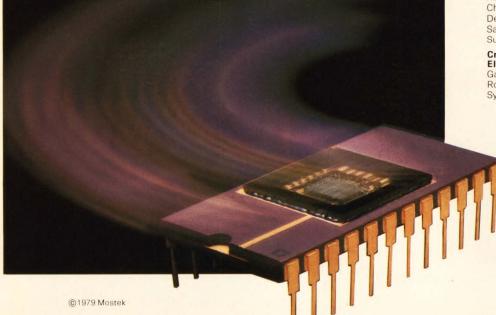

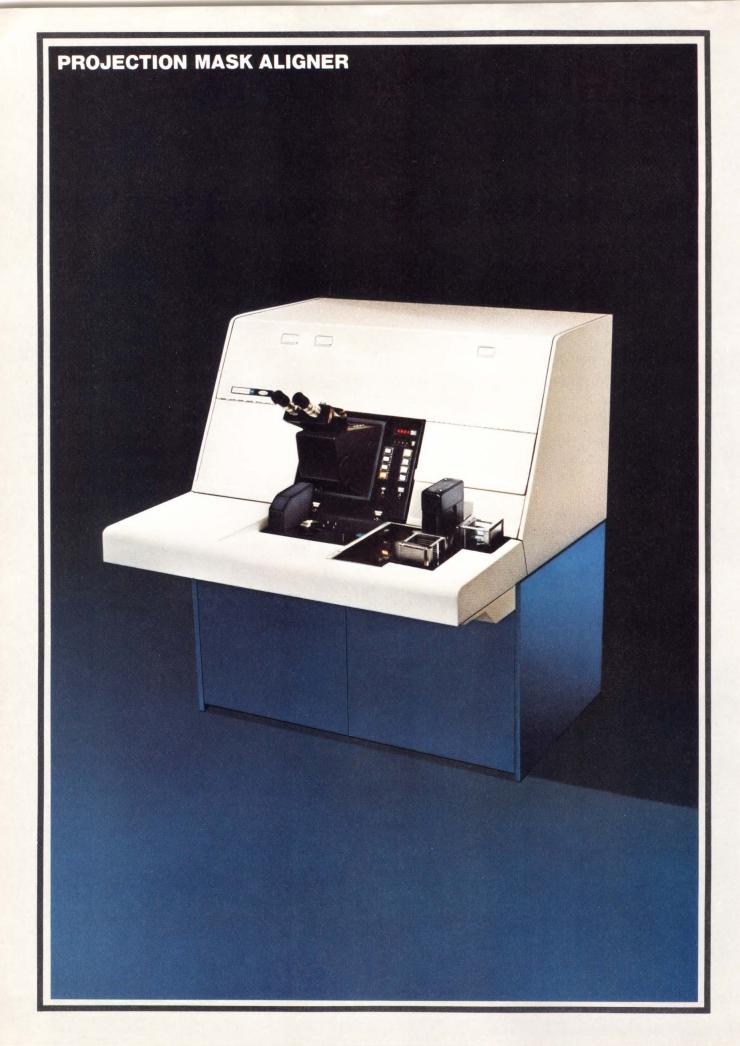

# Introducing the Micralign 200 Series. Higher throughput than step-and-repeat at a much lower price.

Perkin-Elmer designed the new Micralign Model 200 to be the most cost-effective projection mask aligner available. In performance, it achieves 2-micron geometries or better in production, distortion/magnification tolerance of 0.25 micron, and 4 percent uniformity of illumination. Options available include automatic wafer loading and automatic alignment. Soon to be available: deep UV optical coatings for still smaller geometries.

Compared to the leading stepand-repeat aligner, the Micralign Model 200 delivers outstanding performance for not much more than half the cost. It takes about a quarter of the floor space. It provides consistently higher throughput regardless of die size.

The Model 200's remarkable performance is the result of a number of major innovations.

#### Improved optical design and fabrication

We improved the optical design to provide increased resolution

and depth of focus. Optical manufacturing tolerances are five times tighter to ensure precise overlay from aligner to aligner.

#### Near-zero vibration

We minimized vibration. We constructed the Model 200 with two frames—one inside the other. The inner frame, which carries the projection optics and carriage drive, is completely isolated from the outer frame.

We incorporated a superb linear motor carriage drive with air bearing slide. This drive does more than eliminate vibration. With the air bearing feature there's no contact and no wear. And no limit to carriage drive durability.

#### Built-in environmental control

We provided the Model 200 with a built-in environmental chamber. External air, supplied by you or from our optional air conditioning system, is blown through a HEPA filter and heating elements built into the Model 200 top cover. A positive-pressure, class 100 environment is carefully controlled to better than 1°F.

We included a separate thermal control for the mask, to compensate for mask run-out.

#### No mask contamination

We designed a sealed mask carrier for the Model 200. You put the mask in the special carrier right in the mask department. Seal it. When you load the sealed carrier in the Model 200, the cover plates are automatically removed. After use, the cover plates are automatically replaced.


#### Proven production capabilities

Perkin-Elmer, the leader in projection mask alignment systems, offers six years of proven production capability, with an excellent training and service record.

#### Get all the facts

These are just a few of the features that make the Micralign Model 200 Series a completely new concept in projection mask aligners. Get more details on how these and other improvements in design can translate into improvements in your production. For literature, write Perkin-Elmer Corporation, Electro-Optical Division, 50 Danbury Road, Wilton, CT 06897. Or phone (203) 762-6057.

## Behind all these pretty faces...

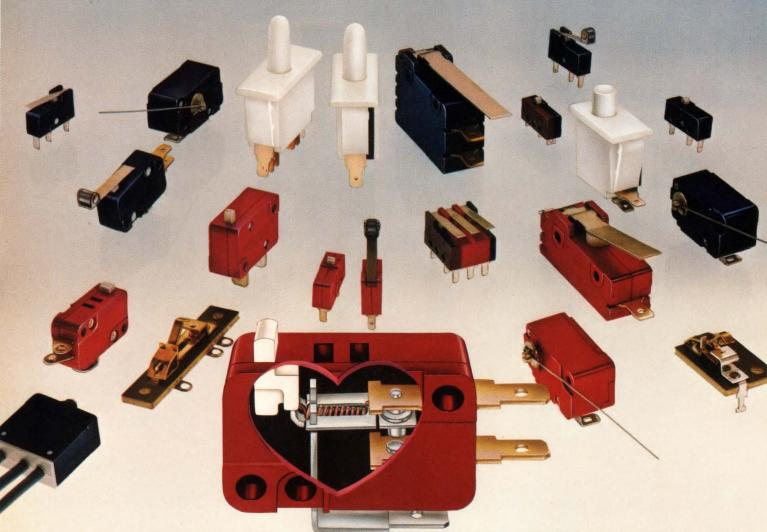

#### beats a heart of coiled stainless steel.

No Cherry snap-action switch has ever died of a broken heart. Because there's a coil spring at the heart of every Cherry switch that expands and contracts again and again and never gets tired. Or breaks. Compare that to the stamped spring many switch builders use. The kind of spring that gets tired . . . and breaks. (Snap. Drat!)

This stainless steel coil spring mechanism not only insures long life, it provides large overtravel to make our switches quicker, easier to design-in and to install. Which is why more than 300 million of them have been designed-

in and installed. So far.

Cherry snap-action switches are available in gold crosspoint design for low energy switching. In general purpose, miniature and subminiature designs. In low torque. Light force. Open or enclosed. Panel mount pushbutton. And more.

For free catalog of all the Cherry switches, just circle the reader service number below. If you're in a hurry, our direct line number is 312/689-7700... and we'll throw in a switch sample of your choice.





CHERRY ELECTRICAL PRODUCTS CORP.

3608 Sunset Avenue, Waukegan, Illinois 60085

SWITCHES and KEYBOARDS — Available locally from authorized distributors.

#### **Electronics newsletter.**

# RCA passes Zenith to become No. 1 in color TV sales

The historic rivalry between color television assemblers RCA Consumer Electronics and Zenith Radio Corp. may shift dramatically in 1979: observers say industry leader Zenith has lost market share while RCA has gained to take over first place. Total industry shipments to dealers in 1979 are down slightly from last year's rate (see p. 57), but RCA's division general manager, Jack K. Sauter, says his unit sales are up a whopping 14%. Zenith concedes that its shipments have declined and that it may have lost position earlier this year because of some quality-control problems with its smaller units. But Zenith Sales Co. president Walter Fisher says, "I have no doubt we'll regain our position as No. 1."

# Merrill Lynch sees 1980s shakeout for semiconductors

A just-published forecast for the semiconductor industry in the 1980s paints a sobering scenario for many companies. Among the prognostications in the \$150-a-copy study by Merrill Lynch Pierce Fenner & Smith Inc.: stabilization of chip prices marked by a gradual departure from "learning curve" price reductions, and a trend toward more proprietary products for greater profit margins. In other words, the semiconductor houses will begin looking like today's computer companies.

The Wall Street firm's most extreme prediction is for a shakeout, with the ultimate emergence of an oligopoly comprising Advanced Micro Devices, American Microsystems, Intel, Mostek, Motorola, National Semiconductor, and Texas Instruments. Regarding Japan, Merrill Lynch expects Japanese penetration of the U. S. market to be more than compensated for by the easier access of U. S. chip makers to the Japanese market.

#### Motorola, Rockwell to sign deal on bubbles and 68000

Motorola Inc.'s Semiconductor Group will be the domestic second source for Rockwell International Corp.'s 256-K bubble memory devices. The companies confirm that they are negotiating, and it is believed that an agreement is all but signed, with only details on support devices to be worked out. In return, Rockwell's Microelectronic Devices division is expected to build Motorola's forthcoming 16-bit microprocessor, the 68000. The agreement will follow Rockwell deals with Siemens AG of West Germany, covering worldwide production and marketing, and with Burroughs Corp., which will build the bubble devices for its own use.

# IBM disk details surface; 'Whitney' coming

Disk drive manufacturers, preparing for the next generation of peripherals (see p. 83), spent time at the National Computer Conference piecing together some of the technical details of IBM's upcoming offerings in the field. They say its new top-of-the-line 571-megabyte model 3370 drive, to be delivered in the last quarter of this year, has dual actuators that allow data at two different locations to be accessed simultaneously. A drive codenamed Whitney is expected to follow; it will use a two-stage positioning mechanism to achieve 1,000 tracks per inch and store 1 billion bytes.

#### E-PROM houses seek to catch TI, Intel at 64-K level

As manufacturers scramble to cash in on the profitable market for single-supply erasable programmable read-only-memory parts, many are looking to the 64-K level as a place to catch or leapfrog 32-K leaders Intel Corp. and Texas Instruments Inc. While most are expected to go with a 28-pin package at the 64-K level based on one of two competing standards, Motorola's strategy will be different. Engineers at the company's Austin,

#### Electronics newsletter.

Texas, Integrated Circuit operation are working on a 64-K E-PROM to be housed in a 24-pin package that is plug-compatible with many present generation 64-K ROMs. Despite the fact that Motorola is not yet shipping fully specified 16-K E-PROMs, officials indicate that the firm expects to have both the 16-K and 64-K parts available before year-end, with a compatible 32-K E-PROM to follow in early 1980.

#### CCD shortage helps RAMs gain ground

Although both Storage Technology Corp. and Memorex Corp. have shipped the first units of their peripheral memory systems based on charge-coupled devices, a shortage of the CCD parts has forced both to plan random-access-memory versions as well. Jessie Aweida, president of STC in Louisville, Colo., says a RAM version of its 4305 fixed-disk replacement will be ready later this year. But since there will be no difference in price or performance, customers probably won't know which one they'll have been given.

#### Exxon says it backs Zilog despite problems

Is money-losing Zilog Inc. for sale? No way, says Donald L. Spalinger, contact executive between the Cupertino, Calif., microcomputer maker and parent Exxon Enterprises. "There is no intention by Exxon Enterprises of selling Zilog off," Spalinger emphasizes. He adds that "Exxon is very high on Zilog; the company has a tremendous future." However, Spalinger says that Zilog lost "under \$6 million" last year on sales of either \$15 million—plus or \$18 million—plus, depending on which accounting system is used. The company's losses since 1975 total under \$10 million, less than those of any other Exxon Enterprises venture, he states.

Zilog's problems have been in management, morale, manufacturing, and mix of products, all of which Spalinger waves off as normal for a rapidly expanding company. But Charlie Bass, Systems division general manager [Electronics, Jan. 4, p. 14], this month became the latest in a string of executives who have left the company this year. Also not helping is a recent \$5 million damage suit by National Semiconductor Corp. alleging that Zilog has confidential information on National's upcoming 16-bit microcomputer. Zilog lost the first round June 8 when a Santa Clara County, Calif., Superior Court temporarily enjoined it from disseminating any of the information. Zilog plans to appeal.

#### Addenda

Joining the data-encryption-standard chip race (see p. 107), American Microsystems Inc. of Santa Clara, Calif., is scheduled to introduce its version—the S6894—within 30 to 60 days. . . . A new line of \$12,000 solid-state chart recorders using a direct-writing polarized-light technique will be price-competitive with galvanometer units, says Bell & Howell Co.'s CEC division. . . . Hewlett-Packard Co.'s first-half orders came to \$1.22 billion, up 39%, says president John Young, while net earnings were up 37% to \$94.7 million. However, he told a group of New York securities analysts that he expected a second-half slowdown in the U. S. economy that could continue well into 1980. This slowdown could enable HP to reduce its order backlog, which grew another \$60 million in the first half despite an aggressive shipping program. A major contribution to the backlog was production stymied by shortages of components such as low-power Schottky parts, but HP's semiconductor suppliers are already seeing an order slowdown, which they feel could relieve the pinch.

#### 32 K ROMS. 3 WEEK DELIVERY.

That's right. The Electronic Arrays EA 8332, fully static 4096 x 8 MOS ROM, is available in prototype quantities within three weeks of your bit pattern approval.

User options include selection of either proposed JEDEC pin configuration and a 450 or 350 nsec access time.

Extra circuit interfacing and buffering is eliminated with the EA 8332. All inputs are TTL compatible, and the three-state outputs can drive two standard TTL loads each.

So contact EA today for 32K ROMS in three weeks. It's as simple as that.

Electronic Arrays. 550 East Middlefield Road, Mountain View, CA 94043. (415) 964-4321.


ELECTRONIC ARRAYS.

MEMORIES.



# The only way 5 amp regulator backwards.

# to blow this is to put it in



Introducing the LM338.
This remarkable monolithic voltage regulator not only delivers the highest power output of any ever developed, it keeps itself out of trouble.

First, it can be adjusted (with just two resistors) to accommodate any voltage between 1.2V and 33V.

That puts an end to stocking a shelf full of different regulators for different voltages.

At any voltage it has a guaranteed 5 amp output, but it can put out transients up to 12 amps when needed. Yet even under the transient load, you're always assured of maintaining the output voltage.

It's a 3-pin design (one for IN, one for OUT, and one for ADJUST) that has a line regulation of .005% per volt, a load regulation of 0.1%, and a current limit that's constant with the temperature. Plus thermal shutdown.

We burn in the LM338 100% by deliberately shorting it, so you can be assured of the reliability you've come to expect from the Linear Leader.

All this comes to only \$5 in lots of a hundred.

To find out more about the safest, most powerful one-size-fits-all regulator ever developed, send us the coupon below.

And we'll see to it that you get to know the LM338 backwards and forwards.

Santa Clara, CA	uctor Drive M/S AT53 95051 LM338 backwards a	
	your LM138/338 data	
Name		Title
NameCompany		Title
		Title

#### National Semiconductor

# lot of siar

We just set a new value standard. Twice.





#### Model 2001 Sweepable Function Generator.™ \$149.95\*

Get the waveforms you need — 1 Hz to .1 MHz in five overlapping ranges: stable, low-distortion sine waves, fast rise/fall-time square waves, high linearity triangle waves — even a separate TTL square wave output. Plus high- and lowlevel main outputs.

An applied DC Voltage at the Sweep input can shift the 2001's frequency; or sweep up to 100:1 with an AC signal.

A pushbutton activates the DC Offset control, which shifts the output waveform up or down on command.

You'd expect to pay a lot more for all the 2001 can do!

#### Model 4001 Ultravariable Pulse Generator.™ \$169.95\*

Here's a precision digital pulse generator with fast rise and fall times covering 0.5 Hz to 5 MHz in 5 overlapping ranges. With pulse width and pulse spacing each independently variable from 100 nsec to 1 sec for an amazing 107:1 duty cycle range.

You'll find the 4001 delivers the pulse modes you need: Continuous, One-Shot, Triggered, Gated, Square Wave, even a Complement mode. The Trigger/Gate input, 50 Ohm variable output, TTL-level output and Sync output connectors are BNCs.

The 4001. Nothing does as much as well for anywhere near the price.

#### Smarter tools for testing and design.

CONTINENTAL SPECIALTIES CORPORATION

70 Fulton Terr, New Haven, CT 06509 (203) 624-3103. TWX 710-465-1227 OTHER OFFICES San Francisco (415) 421-8872. TWX 910-372-7992 Europe CSC UK LTD Phone Saffron-Walden 0799-21682. TLX 817477 Canada Len Finkler Ltd. Ontario



Call toll-free for details

<sup>\*</sup> Suggested U.S. resale. Available at selected local distributors. Prices, specifications subject to change without notice. © Copyright 1979 Continental Specialties Corporation

#### **Electronics review.**

Significant developments in technology and business

# Winchester drive comes equipped with its own tape backup

by Anthony Durniak, Computers Editor

Tape capacity surpasses fixed disk's in combination unit about the size of a floppy disk from Microcomputer Systems

How to use removable recording media to back up the fixed-in-place disks of the Winchester drive may pose the biggest obstacle to the drive's general acceptance by small computer users. For though the Winchester records more in less space than removable drives, that advantage is quickly dissipated when it must be supported by bulky and expensive equipment.

Enter Microcomputer Systems Corp. with an unusual solution: a Winchester disk drive that comes equipped with its own tape backup. And in one model of its new equipment, the Sunnyvale, Calif., peripherals controller maker even uses the same mechanical drive for the disk and tape. The result in the MSC-8000 is a compact, high-capacity unit with a 1/2-inch tape drive on the same motor spindle that spins three 8-in. disks. Forty megabytes of fixed disk with 25 milliseconds average access time and 80 megabytes of removable tape occupy as little space as a standard 8-in. floppy-disk drive.

This prototype unit was certainly the most unusual of the half-dozen 8-in. disks shown at this month's National Computer Conference in New York (see p. 83). Microcomputer Systems combines tape and disk drives in its larger MSC-5900, also brought to the show [Electronics, May 24, p. 197]. This unit, which uses separate mechanical drives,

weds a 17.1-megabyte tape cartridge drive to a 14-in. Winchester drive that holds between 12.5 megabytes and 87.8 megabytes.

Reliability. With nonremovable disks, the IBM-developed Winchester drives have had considerable success applied to large-scale computer systems; because they are sealed they offer higher reliability than removable disk drives. Some 18 months ago they began to be scaled down in size and price for small-computer users. But backing them up with units to copy and remove important information for safe keeping has been a problem solved until now with either removable disks or tape.

James Toreson, president of Microcomputer Systems, points to another advantage of his combination MSC-8000 unit: "The removable [tape] media stores more than the disk [it is backing up]." Most other backup schemes for fixed disk, such as cartridge tapes or floppy disks or even that in Toreson's own MSC-5900, hold only a fraction of the information that the fixed disks hold, so that several packages of media must back up one disk drive, which increases backup time.

In addition, Toreson explains that his tape drive can record data at 750 kilobytes per second, almost matching the 1.2-megabyte-per-second

**Togetherness.** To achieve backup, the prototype Microcomputer Systems MSC 8000 drive is designed to place a rotary tape head (center) on the same spindle as three 8-inch disks.



#### **Electronics review**

transfer rate of the disks and thereby reducing the amount of buffering needed and further speeding up the backup procedure. To accomplish this, Microcomputer Systems uses a rotating read/write head similar to those used in video tape recorders. The tape is held still while the rotating head (which is attached to the disk spindle) writes 50 longitudinal tracks on a tape section. When the section is full, a small motor advances the tape in what Toreson calls a paging operation. Holding the tape still while recording also eliminates mechanical phase jitter, Toreson says, allowing tape recording densities of 6,400 bits per inch.

Although the hybrid tape/disk drive is the most intriguing device in the MSC-8000 series, Toreson also unveiled a high-capacity 8-in. sixplatter, disk-only drive that stores up to 110 megabytes and has the same transfer rates, average access time, and recording densities of 8,500 bits and 510 tracks per in. And his plans call for a tape-only system that uses the same rotating head technique with cartridges of 2-in.-wide tape

and a storage mechanism to hold multiple tape cartridges. Such a system could store as much as 11 billion bytes in a unit about twice the size of a portable microwave oven, he estimates.

Toreson, a former computer designer from Hewlett Packard, founded Microcomputer Systems almost five years ago to sell to original-equipment manufacturers. The privately held company is expected to achieve revenues between \$14 million and \$16 million for its current fiscal year.

It is currently looking to license its new drive to OEMs for manufacture. Prices are not yet firm, but Toreson hopes to market the device in OEM quantities for under \$3,000-a savings of \$1,000 to \$2,000 over the prices now being quoted for separate 8-in. disks and tape units. Toreson also has plans for building the drive in house starting this fall, with volume production by early 1980. He has especially big plans for the hybrid tape/disk drive. "We feel we'll get at least 50% of the 8-inch market," he says.

which makes the 93471, a 4-K-by-1-bit bipolar RAM, will soon bring out a part with the same reverse organization as the 2148.

and Instrument Corp., for example,

"It is a natural upgrade from our 256-by-4-bit RAM," explains Stephen Jasper, marketing manager for the Mountain View, Calif., company's bipolar group. "Judging from the orders we've had for the 1-K part, the new 4-K could be the most pervasive part ever—especially since it won't have pinout problems.

What Jasper is referring to is the difference in pinouts between Intel's 2147 and Fairchild's 93471. But although users will not have to decide on pinouts, they will have several other decisions to make when selecting a 1-K-by-4-bit part.

In addition to the choice between bipolar and MOS, there is another issue. The 2148 has an automatic power-down feature—the same one that is on the 2147—which cuts its power automatically when the chip is idle. But this feature can hinder overall system speed.

Though Intel denies any plans to build a non-powered-down version, another company already has: American Microsystems Inc. is in the competition with the 2114H, a part with an access time currently rated at 70 ns; it will soon be improved to 55 ns to match Intel's.

'We've found that users don't want to pay the penalty of a long chip-select access time that powerdown parts have," explains T. J. Rodgers, manager of development at AMI's Memory division. "That's why we've considered offering a nonpowered-down version of the 2147 as well," he adds.

Buried. The main argument against powered-down parts is that they offer little savings in power dissipation unless used in large arrays, which are not the target of the 2148. Four-bit-wide RAMs are more often found buried in a computer's control architecture or in bit-slice processors. "In those situations, the memory parts are often the limiting factors in a system's speed," says Fairchild's Jasper, "and the designers have little concern for

#### Solid state

#### Fast RAMs aimed at bit slice processors arrive with 1-K-by-4-bit organization

The plot of very fast static randomaccess memories is thickening. Intel Corp. has made the latest move with the introduction of a 4-K RAM that is organized as 1,024 by 4 bits [Electronics, May 24, p. 33]. It is called the 2148-to play off the Santa Clara, Calif., company's popular 2147 RAM that is in a 4-K-by-1-bit arrangement—but there is more to the new device than meets the eye.

The new RAM with a 55-nanosecond maximum access, may have the widest appeal yet of any high-speed memory part. The reason is that, in addition to the minicomputer and mainframe builders who need fast RAMs for cache memories and control stores, there is a new customer—the bit-slice processor maker.

Also aiding quick acceptance of

the part is a standard pinout: the 1-K-by-4-bit arrangement has been around for a long time in the form of the 2114, a static RAM originally aimed at microprocessors and slower computers, whose pinout is accorded a standard by the Joint Electron Device Engineering Council (Jedec).

Thus Intel is widening its market for high-speed RAMs. "The 2148 is not a main memory part," explains Barry Cox, marketing manager for Intel's memory components division in Aloha, Ore., "but it can be used for cache memories as well as or better than the 2147. In fact, many customers for the 2148 will be new."

Other contenders. The 1-K-by-4bit market will get even more interesting in a few months, as other entries appear. Fairchild Camera

power dissipation." Still, Intel's Cox counters that users who do not want the power-down feature can just keep the part selected all the time.

Will Intel build a faster 2148 with the scaled-down H-MOS II process used in the 35-ns 2147H? "It would be a natural evolution for the 2148," says Cox. -Raymond P. Capece

#### NCC

# More new wares on view at the big show

No doubt about it: this year's National Computer Conference at the beginning of the month was an overwhelming success. An unaudited audience tally indicates that 78,843 showgoers crowded the 521 exhibits in New York City's Coliseum and in spillover space at both the Rockefeller Center Hilton and the Personal Computer Conference in the Sheraton Centre. (That figure includes about 17,000 exhibiting personnel and members of the press.)

Moreover, the American Federation of Information Processing Societies, sponsor of the NCC, reports that the accompanying technical sessions drew well, although a breakdown was not immediately available. While there were no startling announcements at those sessions or the exhibits, showgoers did find a number of new products that received little preshow publicity. Among them:

- Pixnet, an advanced network for distributed data processing, provides what is called a virtual link between an IBM mainframe and remote peripherals by performing device identification that otherwise requires an IBM 370X front-end processor and teleprocessing software. The networking system, from modem maker Paradyne Corp., Largo, Fla., permits any system terminal to address any mainframe in the net.
- The 6520 front-end processor can support four host computers and single-ended multiplexed lines, either asynchronous or bisynchronous, and is directly compatible with IBM's

3704/5 and 2703 front-end units. With higher-level products to come, it marks the entry into the communications processor market by modem and multiplexer maker Codex Corp., Mansfield, Mass.

- Source, a telecomputing network, will give owners of personal computers and small businesses access to more than 2,000 programs and data bases, ranging from TV show reruns and consumer information banks to airline reservations and sophisticated business application packages. The net, a service of Telecomputing Corp. of America, McLean, Va., is open to any machine with a 300-word-per-minute telephone interface and offers electronic mail facilities.
- The 1000/4 and 1000/8 small business computer systems provide multiuser capability for four or eight terminals, which may be dumb or smart. The new models are extensions of the 1000 line introduced at least year's NCC by Lear Siegler Inc.'s Data Products division, Anaheim, Calif.

- ADDS/Vantage, a small business system, is aimed at the user with no computing expertise. It marks the debut of terminal maker Applied Digital Data Systems Inc., Hauppauge, N. Y., in the end-user market.
- Comm-Storr II Communications Storage Unit, a single- or dual-drive diskette system, fits between an asynchronous terminal and a data set to permit storage of received or locally generated messages for future use, editing, or transmission. Marketed by American Telephone & Telegraph Co., it was developed and is made by Sykes Datatronics Inc., Rochester, N. Y.
- The Basic-86 interpreter extends to 16-bit 8086 microcomputer installations the Basic-80 interpreter widely used in 8080 and Z80 applications. Also introduced by Microsoft, Bellevue, Wash., was a compiled version of Basic-80.

With old and new products crowding the stands and the hordes of showgoers crowding the aisles, the

#### The Japanese have landed

Japanese electronics companies have made it clear for some time that they intend to participate in the U. S. computer market. Judging from the exhibits by more than a dozen Japanese firms at the National Computer Conference and the number of Japanese nationals staffing the booths, they're well on their way.

Leading the list were a number of state-of-the-art peripherals vendors. Canon U. S. A. Inc., Lake Success, N. Y., unveiled its laser beam printer, which prints 10 pages per minute (about 880 lines) on plain paper using semiconductor lasers and an electrophotographic technique. Although U. S. prices are not set yet, Canon is looking for an original-equipment manufacturer to buy the unit. OEM prices in Japan are about \$10,000, and a 20-page/min version is in the works.

At a nearby hotel, Konishiroku Photo Industry Co., perhaps best known for its Konica cameras, was showing its U-Bix 30-page/min xerographic printer. Based on a combination of fiber optics and a cathode-ray tube, the nonimpact unit is expected to sell to U. S. OEMs for \$7,000. A 15-page/min version that also does convenience copying was also shown.

Fujitsu America, the Santa Clara, Calif.—based subsidiary of Fujitsu Ltd., introduced 66-, 132-, and 165-megabyte Winchester disk drives to OEMs at the NCC. Hitachi Ltd.'s Hitachi America subsidiary and Nippon Peripherals Ltd. both showed top-of-the-line IBM 3350-type disk drives and tape cartridge systems compatible with IBM's 3850.

Among others at the show were NEC Information Systems Inc., Lexington, Mass., Epson America Inc., Torrance, Calif., Panasonic, Arlington Heights, Ill., and Toshiba International Corp., San Francisco.

Perhaps summing up the increased activity best are the words of Hitachi America's corporate song, copies of which were distributed at the NCC in the Japanese company's product brochure: "Hitachi America in the U. S. A., Hitachi America is here to stay."

#### **Electronics review**

NCC came close to bursting at the seams. Moreover, the scene is likely to be repeated at next year's show in Anaheim, Calif., and at the 1981 edition in Chicago. The space at Anaheim is already entirely booked even though maximum booth size was further reduced to 2,000 square feet, with the NCC organizers promising that the parking garage used for spillover exhibits will be airconditioned next year.

If the organizers feel that the NCC has grown too big to be manageable, they are not letting on. They acknowledge that they are considering alternatives-perhaps the encouragement of offshoots, like the concurrent Personal Computer Conference—but are not considering a return to the two-shows-a-year format. -Benjamin A. Mason

and Anthony Durniak

#### Consumer

#### Electronic games tripling sales

There is no such thing as a recession or a slowdown this year, so far as the maufacturers of hand-held electronic games are concerned. By the end of the Summer Consumer Electronics Show in Chicago, held earlier this month, almost all of this year's production had been sold, according to officials from some of the biggest game makers like Mattel Electronics, Milton Bradley, Coleco Industries, and Parker Brothers.

Total retail sales in 1979 could hit \$400 million, more than triple last year's record. Michael J. Moone, vice president of Milton Bradley in Springfield, Mass., for example, says, "Our dollar sales are 40% to 42% ahead of last year."

Once again, game assemblers say their production will be limited by what chip manufacturers can send them. Several companies, among them Mattel, received fewer chips this year than expected, because normal yield problems took a heavier toll of production volumes than expected, says Edward M. Krakauer, senior vice president and general manager of Mattel, which is based in Hawthorne, Calif.

Branching out. The game designers are also branching out beyond the traditional hand-held units that duplicate athletic games like baseball and football and are moving into other areas. Coleco has an astrology computer, and Milton Bradley introduced a \$60 space game, "Space

Rider," that includes a plastic seat with a control panel. Complete with a viewing screen and sound effects, it lets a child simulate the piloting of a space craft.

Despite the strong showing expected by home computers in the marketplace, video-game makers also say that sales are better than ever. Atari Inc., Sunnyvale, Calif., reports that sales of its programmable video game this year are at almost double the rate of last year.

There is more good news for retailers and manufacturers alike-a trend away from seasonal sales peaks at Christmas. Peter N. Rosenthal, marketing manager at Atari, says, "The selling window has broadened substantially." -Larry Marion

#### Computers

#### Two heads better than one for Univac

The Univac 1100 series, one of the oldest computer families in the industry, received a new member earlier this month. But the grandfather, model 1107, may not recognize its most recent descendant, which has two heads.

Dubbed the 1100/60, the new computer was unveiled by the Blue Bell, Pa.-based division of Sperry Rand Corp. at the National Computer Conference. Its multimicroprocessor hardware architecture is unique among general-purpose mainframe computers but nevertheless reflects a trend toward the use of standard large-scale integrated circuits to improve the price and performance of an established computer architecture. The 1100/60, as expected, uses some 68 of Motorola's 10800 emitter-coupled-logic bit-slice microprocessors [Electronics, May 24, pp. 34 and 111].


The 1100/60 is available in six field-upgradable models. All of these are based on the same central processing unit.

Parallel redundancy. Providing both increased performance and reliability at a reduced price is a 36-bit



Good signs. It doesn't take an electronic astrologer to predict the solid success of hand-held games. One popular entry was Coleco's Zodiac, in which a microprocessor reads the stars.

# THIS IS KONINGER ON THE RESERVE OF THE PROPERTY OF THE PROPERT

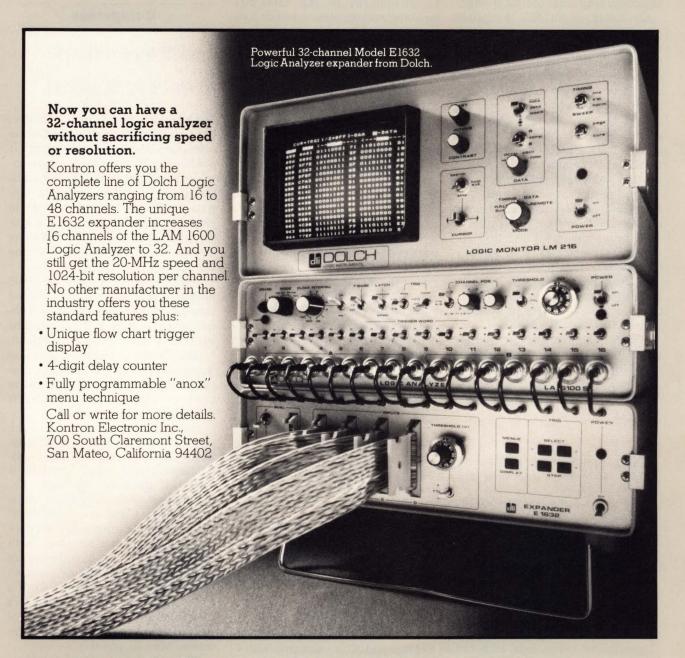

#### LOGIC ANALYZERS:

FOR DATA ON KONTRON® MULTIMETERS, COUNTERS, PROM PROGRAMMERS AND PRINTERS, CALL (800) 227-6854. IN CALIFORNIA CALL (415) 348-7291.

#### **Electronics review**

hardware architecture based on a CPU composed of four microprogrammed microinstruction-execution units. Each of these comprises nine of the 4-bit-wide 10800 bit-slice microprocessors.

These microinstruction-execution units are paired to create two instruction processors—in essence, two heads. Macroinstructions are then executed by a series of microinstructions read from control storage.

Operating in parallel, the paired microinstruction-execution units each perform parts of up to four microinstructions at the same time in an overlapped, or pipelined, manner. This means that while the results of one instruction are being stored, a second instruction is already being executed, the data for a third instruction is being fetched, and the addresses for a fourth instruction are being generated.

Apparently proving that two heads are better than one, Univac says the dual units are the key to the 1100/60's increased reliability. Although each operates in an overlapped manner within itself, the two instruction processors operate redundantly, performing the same operations on the same data in synchronism and comparing answers.

Should the answers fail to match, the hardware automatically repeats the instruction. This prevents transient errors from interrupting the machine, Univac explains. Should the answers disagree a second time, the operator is signaled that a failure has occurred.

When a failure occurs, according to Ronald H. Wandersee, director of 1100-series worldwide marketing and services, Univac will use a "completely different maintenance philosophy." The customer calls a toll-free telephone number, allowing the CPU to be diagnosed remotely via an attachment to the 1100/60's separate microprocessor-based System Support Processor.

Using a scan-set technique, Univac can remotely read in a set of data, capture the contents of various registers in the microinstruction execution units, and compare them with a set of expected results.

Because there is so much logic on the bit-slice microprocessor chips, "it is easy to diagnose the problem down to the chip level," adds B. J. Walker, program director for 1100 series systems development at Univac's Roseville, Minn., facility.

To increase operating times, portions of the hardware can be disconnected should they fail, allowing the rest of the machine to continue operation, albeit at a degraded performance level.

The 1100/60 also uses new technology in its main memory, which comprises 16-K MOS chips and operates with an average access time of 575 nanoseconds. Basic memory in all models, is 524,288 words (36 bits

each)—approximately 2.4 megabytes—expandable in 262,144-word increments to a maximum in the H2 model of 1,098,576 words—about 4.9 megabytes.

Holding all this semiconductor technology together is new packaging technology based on a 10-layer printed-circuit board. Up to 72 of these boards are plugged into a 16-layer backplane. -Anthony Durniak

#### Companies

# Intersil looks hard at data acquisition

For a company to compete effectively in the expanding data-acquisition computer interface marketplace, it needs strong capabilities in monolithic technology as well as the traditional hybrid and module approaches. With this competence in place, Intersil Inc. reasons it is now the new contender among leading market heavyweights like Analog Devices and Burr-Brown.

With fiscal 1978 sales of \$102 million, Intersil recently added strength in hybrid and module technology by acquiring Datel Systems Inc., a \$21.4 million Mansfield, Mass., leader in data-acquisition devices using these technologies. Together they total some \$19 million in computer interface converters, it is estimated.

Intersil's bent has long been towards data-acquisition components-it introduced a 12-bit microprocessor several years ago that is still in demand by the 12bit-oriented data-acquisition market-and the Cupertino, Calif., company is currently expanding its digital and linear product lines, both built primarily with complementary metal oxide semiconductors. Intersil is building a version of Intel Corp.'s 8748 single-chip microcomputer in C-MOS, and has introduced a line of C-MOS operational amplifiers [Electronics, May 10, p. 44].

What the Intersil-Datel combination is after is the dominant slot in a \$300 million-a-year or better market

#### How the 1100/60 stacks up

The 1100/60 is seen by most industry observers as Univac's answer to IBM's 4300 small mainframe computers. The smallest Univac unit, the 1100/60 model C1, has a basic purchase price of \$318,975 and is comparable in price and performance to IBM's 4331, including operating-system software.

The 1100/60 model C2, with its extended instruction set, is said to have about 1.2 times the performance of a C1 and is priced at \$355,365. Adding cache memory to the C1 doubles its performance and produces the model H1, which is priced starting at \$657,040. The 1100/60 model H2 includes cache and the extended instruction set. It has about 2.4 times the performance of the C1 and sells for \$693,610.

Further performance improvements are achieved by tightly coupling two of the H models, producing the 1100/62 model H1 or H2. The top-of-the-line multiprocessor H2 has 5 times the performance of the C1; its power is comparable, Univac feels, to that of an IBM high-end 3032 mainframe. With prices starting at \$1,442,075, Univac estimates it has about a 10% advantage in price/performance ratio over the IBM offering.

## Hybrid Systems DACs: Fastest, Lowest Power, Most Accurate, µP Compatible



#### Fastest output IC DAC.

DAC392-12's voltage output can be updated at 1.3mHz. It's the fastest 12 bit IC DAC anywhere. Faster than most 12-bit modules, too. Provides 2 quadrant multiplication for today's high speed graphic displays.



#### Lowest power 12-bit DAC.

DAC356LP-12 uses just 75mW to operate switches, ladder network, internal reference and output amplifier. In applications where many DACs are used, such as flight simulators, the savings can add up to watts.



#### First IC M-DAC with true 14-bit accuracy.

Perfect for high-resolution data displays. DAC331-14 features  $\pm \frac{1}{2}$  LSB maximum linearity error and 2- and 4-quadrant multiplication. Operates from single +5 or +15V power supply.



#### Low-cost, $\mu$ P-compatible latched DACs.

Easiest to use because they're so complete. DAC336-8 and -12 are ideal for microprocessor applications. Each includes reference, ladder network, switches, output amplifier and input register.

These new hybrid IC DACs are available in commercial and MIL-STD-883 versions. Backed by more than a decade of leadership in data conversion, they expand our already comprehensive



Incorporating our own proprietary thin-film networks into our products assures superior characteristics. And to guarantee the finest quality data converters available, nearly one-third of our manufacturing labor is devoted to inspection and testing at various stages of production.

Whatever the application — satellite systems, navigation and guidance equipment, or demanding industrial and commercial applications — our products meet the highest standards for reliability and performance.

For fast results, call or write. Or circle the number(s) on the reader service card.

#### When the chips are down . . .

#### Hybrid Systems

Crosby Drive, Bedford, MA 01730 Phone (617) 275-1570 (TWX 710-326-7584 HYBRIDSYS BFRD)

In Europe: Hybrid Systems GmbH. 61 Darmstadt, Luisenplatz 4, Germany Tel. 6151-291595 (TELEX 419390 HYSY D)

In the United Kingdom: Hybrid (Component) Systems U.K. Ltd. 12A Park Street, Camberley, Surrey Tel. (0276) 28128 (TELEX 858720 HYBRID G)



#### **Electronics review**

that is growing at least 30% a year in such products as analog-to-digital and digital-to-analog converters, analog multiplexers, amplifiers, power operational amplifiers, and the like. "We plan to make everything in the signal chain for data acquisition and process control," director of analog product marketing Jerry Zis declares. "We have all the capabilities. As we go along, we'll see what vertical integration we'll do."

Impressive. The breadth of capabilities brought together by the combination certainly impressed Datel. "We had many offers from other companies, but we never gave them serious thought," says Michael G. Tagaris, former Datel president, now a senior vice president at Intersil. "It's a perfect match, complementing our product line," he says. Adds Intersil's Zis, "We've filled in virtually all the gaps [in data acquisition] except for gates and flipflops."

Pointing to Intersil's strong suits in linear and C-MOS, Zis says the strategy is "to make better, cheaper devices than they [the competitors] do." An example out this month is a two-chip, 16-bit microprocessorcompatible a-d converter for process control applications where a signal may have to be sampled only once a second. The ICL 8068-7104 pair converts up to three times a second but sells for a very low \$29 in quantities of 100. The idea here, Zis says, is that a user could multiplex a number of these, instead of using a faster but very expensive converter.

Next quarter, Intersil will introduce a data-acquisition subsystem aimed at process control and energy management, Zis says, adding that it will have a "unique" data protocol and raise eyebrows in terms of price and performance. He also expects to expand into other areas such as vertical-groove MOS power fieldeffect transistors. Though not true data-acquisition products, these will be very big in switching power supplies, he says. Other power supply and power managementoriented products will be small- and large-scale voltage references.

Intersil will also soon introduce a

#### **News briefs**

#### New Josephson-junction logic is IBM's fastest

Breaking its own records for superspeed logic, International Business Machines Corp. has fabricated simple AND and OR gates that are the fastest yet. Including propagation delays, a two-input OR gate switches in 13 picoseconds, and an AND circuit with four inputs and two outputs takes 41 ps. Researchers at the Thomas J. Watson Research Center, Yorktown Heights, N. Y., say the average power of the gates is about 6 microwatts. What's more, a new configuration that IBM is calling current-injection logic triples the speed, but like earlier Josephson-junction designs, the circuits must be cooled nearly to absolute zero.

#### Philips shows tiny player for digital audio disks

Laser-based players for digital audio disks can be much smaller than conventional analog units, and they can offer superior sound, says North American Philips Corp. of New York, which is showing a prototype playing 1-hour disks only  $4^{1/2}$  inches in diameter. However, to shrink the machine size to about that of an audio tape cassette player, the associated company, N. V. Philips Gloeilampenfabrieken of the Netherlands, has abandoned compatibility with its video players, which use 12-in. disks moving at speeds up to 12,000 revolutions per minute. The audio player's solid-state laser reads and decodes 14-bit pulse-code-modulated music from the disk, which slows from 500 to 250 revolutions per minute as the laser scans from its center to its circumference. North American Philips says Magnavox Consumer Electronics Co., its Fort Wayne, Ind., subsidiary, which already offers a video-disk system, will produce and market the laser-based digital audio disk unit within a few years.

#### Monsanto doubling silicon wafer production

A major new source of silicon wafers will go on line next summer when Monsanto Co. opens what it is calling the world's largest such plant, with an ultimate annual capacity of 150 million square inches of silicon. The facility will make 4-in. wafers, with a 5-in.-wafer production line starting up later. It will effectively double Monsanto's worldwide production of polished slices, says James E. Springgate, general manager of the Electronics division, noting that the company is expanding its St. Peters, Mo., plant 25% and its Kuala Lumpur, Malaysia, plant 60%.


#### U. S. semiconductor shipments to jump over 15% in 1979 . . .

Led by a 20.2% surge in integrated circuit shipments, total semiconductor sales by American companies in the world market should increase by 15.3% this year, according to figures released recently by the Semiconductor Industry Association. Total dollar value, SIA estimates, will be just under \$5.6 billion in 1979 compared to \$4.85 billion in 1978. ICs should grow from under \$3.3 billion to over \$3.9 billion.

Digital MOS devices should hit \$1.92 billion this year, well ahead of digital bipolar shipments of \$1.15 billion. Moreover, MOS devices will boast a 24.9% growth rate, according to the report. While the U. S. domestic market will continue to show the largest dollar-value market for ICs, Japan, with a 26.4% increase, shows the largest percentage growth rate. As for discretes, the SIA expects a 5.2 growth rate this year, and again the Japanese market promises the highest increase.

#### . . . while Japanese said to hold a third of U. S. 16-K market


Japanese semiconductor makers now hold a 35% share of the \$200 million to \$250 million U. S. domestic market for 16-K dynamic random-access memories, say members of the Semiconductor Industry Association. The firms—principally Nippon Electric Co. and Fujitsu Ltd.—have moved in to fill a demand that American companies cannot meet, but apparently do not figure in the well-supplied 4-K RAM market in the U. S. The SIA members allege that the Japanese firms are meeting the U. S. price of \$6 apiece, although it is half the price at which they sell in Japan.

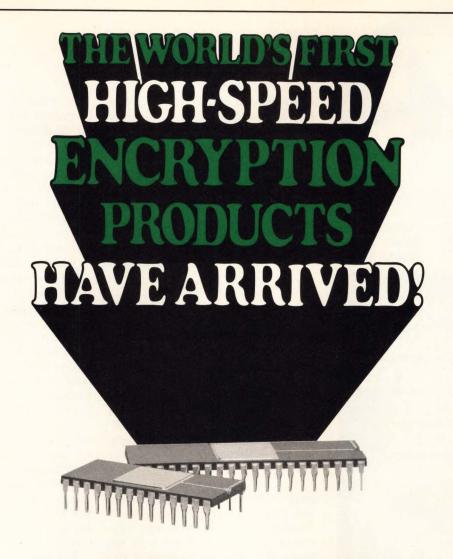

#### AND MORE ARE ON THE WAY!

The Data Encryption Standard (DES) is a MOS/LSI device which implements the NBS Data Encryption Algorithm. DES is implemented in N-Channel, silicon gate technology and all inputs and outputs are TTL compatible. Two configurations (WD2001E/F and WD2002A/B) are available **now** for preliminary sampling; a third (WD2003), which performs NBS Algorithms with high-speed cipher feedback and complies with Federal Standard 1026/1027, will be available for preliminary sampling by August.

The DES interfaces with a wide variety of processors and mini-computers. A typical system implementation and the DES block diagram are shown





#### **FEATURES:**

- Guaranteed minimum data rate of 167K bytes/sec.
- Higher speed versions available
- WD2001 has a Common Clear Data and Encrypted Data I/O Bus WD2002 has 2 separate and independent I/O Buses: one for Clear Data, one for Encrypted Data
- Implements NBS Data Encryption Algorithm

  - Single Key Encrypt in the block mode

Western Digital is always in the forefront of TOMORROW'S TECHNOLOGY TODAY. That is why we are the first company to offer high-speed ENCRYP-TION. And it doesn't stop there: A whole family of Encryption Products are being developed to meet the ever changing needs of a dynamic industry.

#### THEY'RE HERE. NOW!

WESTERN DIGITAL

3128 REDHILL AVENUE, BOX 2180 ● NEWPORT BEACH, CA 92663 (714) 557-3550, TWX 910-595-1139





Interfaces to telephone line

Low power consumption

On-chip regulator

Positive switch on

**Ideal for:** 

MINDIP 8-pin package

BELL REPLACEMENT

EXTENSION RINGER

DOOR CHIMES

ALARM CIRCUITS

Minimum of external components

• LOW PRICE: \$1.25 at 10 K qty.

Contact the leader in tone receivers and

#### **Electronics review**

C-MOS version of the 8048 microprocessor. On the bipolar side, the company is developing a 12-bit a-d converter with a targeted conversion time of less than 10 microseconds.

Nor is the other half standing idle. In April Datel launched a \$3190 data-acquisition system boasting an acquisition rate of 250,000 samples/s and 12-bit resolution [Electronics, Apr. 12, p. 180]. -William F. Arnold

#### **RCA Solid State** at the crossroads

Though the semiconductor industry generally has proven too tough a nut for established companies to crack, RCA Corp. has been a notable exception to that rule. However, its Solid State division, once an industry leader in the complementary-MOS field, has not managed to vault into the front ranks of the industry.

Now, in the wake of the sudden resignation of division vice president and general manager Bernard V. Vonderschmitt, observers are wondering what RCA will do with the Somerville, N. J.-based division. Executive vice president Roy H. Pollock has been appointed acting general manager.

Sales for the division are healthy, with outsiders estimating 1978 totals at \$111 million for discrete and \$126 million for integrated circuits. Yet RCA president Edgar H. Griffiths has intimated that the division is not living up to corporate expectations. With a background in the financial side of the company, Griffiths emphasizes the bottom line.

sos. For many, the problems can

be summed up in a single word: sapphire. The division has devoted much of its developmental effort to putting its C-MOS technology on sapphire, combining its demonstrated low-power advantage with

the smaller, faster chips possible on the precious-mineral substrate. In spite of all the work, silicon on sapphire is far from challenging bulk-silicon technologies, nor has

RCA taken a leadership position in any semiconductor technology.

As much as the SOS technology, its market share in ICs is a question for the division. Its 1802 8-bit C-MOS microprocessor and related ICs are an example: they sell, but the 1802 has only 10% of the 8-bit market, according to one outside survey. "I certainly don't hear about them as a strong factor in MOS," says Kent A. Logan, vice president of investment research at Goldman Sachs & Co.

Still, the division does have some impressive strengths, especially in the consumer, instrumentation and control, military, and automotive markets. Among the strong points are power transistors: "They've always been very good and probably always will be," says Hans Severiens, vice president of investment banking at Merrill Lynch Pierce Fenner & Smith Inc.

The electro-optics operation is a well-respected outfit, especially for its work on charge-coupled-device imagers. On the IC side of the house, the 4000 series sets the pace in C-MOS logic, although competitors like Motorola have moved in. Motorola now claims to be number one in C-MOS.

Yet the SOS program is lagging, and results have been spotty. Back when RCA signed an agreement to produce C-MOS-on-sapphire versions of Intel's 8-bit 8085A and related parts [Electronics, April 13, 1978, p. 41] the Solid State division reported it would have its own single-chip 1804 out by year's end. Now it is targeting the end of this year for introduction of the microcomputer, the Intel parts, and some new SOS products of its own, including a 2,048-bit erasable programmable random-access memory.

Production. All indications are that RCA simply does not have the recipe for C-MOS on sapphire as a production process. Its 4,096-bit static random-access memories are in production and have proved denser than the C-MOS RAMs from Harris and Intersil-24,000 square mils against more than 30,000 mil<sup>2</sup> While specified at a 450-nanosecond access time, the upper end of the range of the competing ICs, the SOS part is coming through mostly at 600

### **PROMs**

#### **ECL PROMs**

Organization	Part Number	Access Time (ns max)	Output	No. of Pins
32 × 8	MCM10139▲	25	ECL output	16
256 x 4	MCM10149▲	30	ECL output	16

#### TTL PROMs

Organization	Part Number	Access Time (ns max)	Output	No. of Pins
64 x 8	MCM5503/ 5303▲	125	Open collector	24
64 x 8	MCM5504/ 5304▲	125	2K pull-up	24
512 × 4	MCM7620▲	70	Open collector	16
512 x 4	MCM7621▲	70	3-state	16
512 × 8	MCM7640▲	70	Open collector	24
512 × 8	MCM7641▲	70	3-state	24
1024 × 4	MCM7642▲	70	Open collector	18
1024 x 4	MCM7643▲	70	3-state	18
1024 × 8	MCM7680▲	70	Open collector	24
1024 × 8	MCM7681 ▲	70	3-state	24
2048 × 4	MCM7684*▲	70	Open collector	18
2048 × 4	MCM7685*▲	70	3-state	18
2048 × 4	MCM7686*▲	70	Open collector	
			with latches	20
2048 x 4	MCM <b>7687</b> *▲	70	3-state	
			with latches	20
2048 × 4	MCM <b>7688</b> *▲		Open collector	
2048 × 4	MCM7689*▲		with registers 3-state	20
2040 ^ 4	WOW/003 -		with registers	20

### **EPROMs**

#### MOS EPROMs

Organization	Part Number	Access Time (ns max)	No. of Power Supplies <sup>1</sup>	No. of Pins
1024 x 8	MCM2708C ▲	450	3	24
1024 x 8	MCM27A08C▲	300	3	24
1024 x 8	MCM68708C ▲	450	3	24
1024 x 8	MCM68A708C	300	3	24
2048 x 8	TMS2716 C▲	450	3	24
2048 x 8	TMS27A16C▲	300	3	24
2048 x 8	MCM2716C*▲	450	1	24
2048 x 8	MCM27A16C*▲	350	1	24
8192 x 8	MCM68764C*	450	1	24

### MOTOROLA MEMORIES

Motorola has developed a very broad range of MOS and bipolar memories for virtually any digital data processing system application. And for those whose requirements go beyond individual components, Motorola also supplies Memory Systems and Micromodules.

New Motorola memories are being introduced continually. This selector guide lists all those available as of June,1979. For later releases, additional technical information or pricing, contact your nearest authorized Motorola distributor or Motorola sales office.

Data sheets may be obtained from your in-plant VSMF Data Center, distributors, Motorola sales offices or by writing to:

Literature Distribution Center Motorola Semiconductor Products, Inc. P.O. Box 20912 Phoenix, AZ 85036.



## MOTOROLA MEMORIES Selector Guide

## RAMs ROMs PROMs EPROMs

**June 1979** 





Organization	Part Number	Access Time (ns max)	No. of Power Supplies <sup>1</sup>	No. of Pins
4096 × 1	MCM4096C-6▲	250	3	16
4096 x 1	MCM4096C-16 <sup>▲</sup>	300	3	16
4096 x 1	MCM4096C-11▲	350	3	16
4096 x 1	MCM4027AC-2▲	150	3	16
4096 x 1	MCM4027AC-3 <sup>▲</sup>	200	3	16
4096 × 1	MCM4027AC-4▲	250	3	16
4096 x 1	MCM6604AC	350	3	16
4096 x 1	MCM6604AC-2	250	3	16
4096 x 1	MCM6604AC-4	300	3	16
4096 x 1	MCM6605AL	300	3	22
4096 × 1	MCM6605AL-2	200	3	22
16,384 x 1	MCM4116AC-15	150	3	16
16,384 x 1	MCM4116AC-20▲	200	3	16
16,384 x 1	MCM4116AC-25▲	250	3	16
16,384 x 1	MCM4116AC-30▲	300	3	16

#### TTL BIPOLAR RAMS

Organization	Part Number	Access Time (ns max)	Output	No. of Pins
256 x 4	MCM93412*▲	45	Open collector	22
256 × 4	MCM93422*▲	45	3-state	22
1024 x 1	MCM93415▲	45	Open collector	16
1024 x 1	MCM93425▲	45	3-state	16

\*To be introduced.

▲Second source.

Heavy black type denotes industry standard part numbers.

Operating temperature ranges:

MOS 0°C to 70°C CMOS -40°C to +85°C and -55°C to +125°C

Consult individual data sheets.

Military -55°C to +125°C, Commercial 0°C to 70°C

TTL

1<sub>MOS</sub> power supplies:

3 +12, ±5 V 1 +5 V

All MOS outputs are 3-state except the 6570 and 6580 Series which are

2 Character generators include shifted and unshifted characters, ASCII, alphanumeric control, math, Japanese, British, German, European and French symbols.

#### MOS STATIC RAMS

Organization	Part Number	Access Time (ns max)	No. of Power Supplies <sup>1</sup>	No. of Pins
128 × 8	MCM6810	450	1	24
128 × 8	MCM68A10	360	1	24
128 × 8	MCM68B10	250	1	24
1024 × 4	MCM2114P-20 <sup>▲</sup>	200	1	18
1024 × 4	MCM2114P-25 <sup>4</sup>	250	1	18
1024 x 4	MCM2114P-30 <sup>4</sup>	300	1	18
1024 × 4	MCM2114P-45 <sup>▲</sup>	450	1	18
1024 × 4	MCM21L14P-20▲	200	1	18
1024 × 4	MiCM21L14P-25▲	250	1	18
1024 × 4	MCM21L14P-30 <sup>▲</sup>	300	1	18
1024 × 4	MCM21L14P-45 <sup>▲</sup>	450	1	18
4096 x 1	MCM6641P-20▲	200	1	18
4096 x 1	MCM6641P-25▲	250	1	18
4096 x 1	MCM6641P-30▲	300	1	18
4096 × 1	MCM6641P-45▲	450	1	18
4096 × 1	MCM66L41P-20▲	200	1	18
4096 x 1	MCM66L41P-25▲	250	1	18
4096 x 1	MCM66L41P-30▲	300	1	18
4096 x 1	MCM66L41P-45▲	450	1	18
4096 x 1	MCM2147C-55*▲	55	1	18
4096 x 1	MCM2147C-70*▲	70	1	18
4096 x 1	MCM2147C-85*▲	85	1	18

#### **CMOS STATIC RAMs**

Organization	Part Number	Access Time (ns max)	No. of Power Supplies	No. of Pins
256 x 4	MCM145101-1 <sup>▲</sup>	450	1	22
256 × 4	MCM145101-3 <sup>▲</sup>	650	1	22
256 x 4	MCM145101-8 <sup>▲</sup>	800	1	22
4096 × 1	MCM146504 <sup>▲</sup>	450	1	18
1024 x 1	MCM146508*▲	460	1	16
1024 × 1	MCM146508-1* <sup>▲</sup>	300	1	16
1024 × 1	MCM146518*▲	460	1	18
1024 x 1	MCM146518-1**	300	1	18

#### **ECL BIPOLAR RAMs**

Organization	Part Number	Access Time (ns max)	Output	No. of Pins
8 x 2	MCM10143	15	ECL output	24
256 x 1	MCM10144▲	26	ECL output	16
16 x 4	MCM10145▲	15	ECL output	16
1024 x 1	MCM10146▲	29	ECL output	16
128 x 1	MCM10147▲	15	ECL output	16
256 x 1	MCM10152▲	15	ECL output	16

#### MOS STATIC ROMs

Character Generators<sup>2</sup>

Organization	Part Number	Access Time (ns max)	No. of Power Supplies	No. of Pins
128 × (7 × 5)	MCM6670P	350	1	18
128 x (7 x 5)	MCM6674P	350	1	18
128 × (9 × 7)	MCM66700P▲	350	1	24
128 × (9 × 7)	MCM66710P▲	350	1	24
128 × (9 × 7)	MCM66714P▲	350	1	24
128 × (9 × 7)	MCM66720P▲	350	1	24
128 × (9 × 7)	MCM66730P▲	350	1	24
128 × (9 × 7)	MCM66734P	350	1	24
128 × (9 × 7)	MCM66740P▲	350	1	24
128 × (9 × 7)	MCM66750P▲	350	1	24
128 × (9 × 7)	MCM66760P▲	350	1	24
128 × (9 × 7)	MCM66770P	350	1	24
128 × (9 × 7)	MCM66780P	350	1	24
128 × (9 × 7)	MCM66790P	350	1	24

#### **Binary ROMs**

Organization	Part Number	Access Time (ns max)	No. of Power Supplies	No. of Pins
1024 × 8	MCM68A30P8	350	1	24
1024 × 8	MCM68A308P7	350	1	24
2048 × 8	MCM68A316P91	350	1	24
1024 × 8	MCM68B30AP▲	250	1	24
1024 × 8	MCM68A30AP▲	350	1	24
1024 × 8	MCM68B308P▲	250	1	24
1024 × 8	MCM68A308P▲	350	1	24
2048 × 8	MCM68A316EP▲	350	1	24
2048 × 8	MCM68A316AP▲	350	1	24
4096 × 8	MCM68A332P▲	350	1	24
4096 × 8	MCM68A332P2*	350	1	24
8192 x 8	MCM68A364P*▲	350	1	24
8192 x 8	MCM68A364P3*	350	1	24
8192 × 8	MCM68B364P3*	250	1	24

#### **CMOS ROM**

Organization	Part Number	Access Time (ns max)	No. of Power Supplies	No. of Pins
256 x 4	MCM14524	1200	1	16

#### **Electronics review**

ns and above. The division claims a 250-ns version is on its way.

The Solid State division had devoted considerable effort to developing inexpensive sapphire substrates. Yet the cost still runs 20% above comparable silicon substrates.

No matter what the outcome of the SOS effort, the IC operation has a tough row to hoe in competing with other technologies. "Its main problem is that it is betting heavily on C-MOS, and that has not become a major computer technology or a major microprocessor technology," says Merrill Lynch's Severiens.

So the departure of Vonderschmitt leaves the Solid State division at a crossroads. The former
general manager refuses to discuss
his resignation, although he has
referred to the personal strain he
experienced in running the division.
Moreover, Pollack refuses to comment on the future. But it is a safe
bet that RCA is looking hard at the
division and its operations, not
just looking hard for another general manager. -Benjamin A. Mason
and Raymond P. Capece


#### **Distributed processing**

## Multi-routes mapped in IBM's software

Now that practically every major computer manufacturer has a distributed-processing architecture, it is the communications management software that increasingly differentiates the offerings. International Business Machines Corp. apparently intends to spotlight its Systems Network Architecture with a set of new software products that significantly increase network configuration flexibility and diagnostic capabilities. Three new microprocessor-based modems were also added.

The basis of the new software is Release 3 of IBM's Advanced Communications Function Virtual Telecommunications Access Method (ACF/VTAM) and Version 2, Release 3, of the Telecommunications Access Method (ACF/TCAM). Running on

# NOW! A NEW SOLID-STATE MICRO RELAY FROM ELEC-TROL

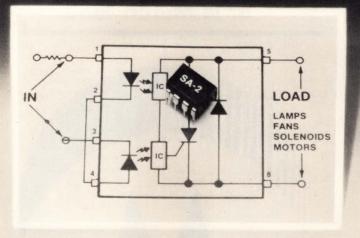

Elec-Trol has introduced a new solid-state micro relay, Model SA-2, that comes in an 8-lead dual in-line epoxy package and measures only .335"L by .250"W. This new relay features inverse parallel SCR output, high built-in transient immunity, optical isolation, zero volt switching, and very low leakage current.

The input is DTL/TTL compatible and is composed of two light emitting diodes that can be connected externally in either series or parallel. The output is composed of two back-to-back SCR's driven by high technology IC circuits optically coupled to the input LED's. The unit is designed to handle 0.5 amperes steady-state current and is guaranteed to 2500 VAC minimum breakdown voltage between output and input.

This tiny new relay is especially useful wherever high-density assembly is desired. It can be used directly as a micro relay in low current applications, or it can be used as a driver to drive power back-to-back SCR's or triacs. Potential driver applications include fans, computer peripheral equipment, microwave ovens, and motor controls.

For more information, use the reader service card. For sample or off-the-shelf delivery, contact your Elec-Trol distributor.

Elec-Trol, Inc., 26477 N. Golden Valley Road, Saugus, Calif. 91350. Phone: (213) 788-7292, (805) 252-8330.TELEX 18-1151.

### **ELEC-TROL**

Circle 51 on reader service card

# 1979 Electronics Buyers' Guide

Elega

The only book of its kind in the field. If you haven't got it, you're not in the market.

To insure prompt delivery enclose your check with this coupon.


1979 edition available in June.

Electronic Buyers Guide 1221 Ave. of the Americas New York, N.Y. 10020

Canada.		(ies) of 1979 EBG. Telivered in the USA of
☐ I've enclos	sed \$52 per copy for	delivery elsewhere
Name		
Company		
Street		
City	State	Zip

#### Leipzig Fair

German Democratic Republic 9/16 March 1980

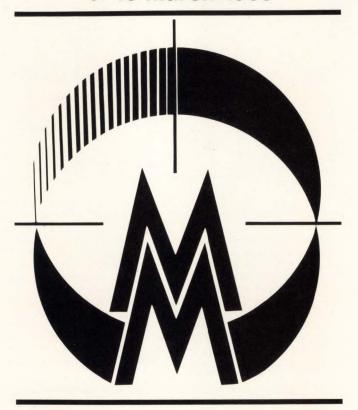

#### The ingredients of success

An age-old tradition, long experience, the knowledge of today and a vision of tomorrow—these are the foundations on which are based the success of Leipzig Fair, world trade centre and doorway to the stable market of the member states of the Council for Mutual Economic Assistance. Every year, on stands covering over 40,000 square meters, from more than 25 countries manufacturers of electrical products ranging from transistors to turbines, and including advanced electronics in the automation and data processing fields, show their most recent developments. Buyers and technical specialists from all over the world recognise Leipzig as an outstanding centre for concluding business and undertaking the comparative evaluation of new products.



Space in next year's electrical engineering display is fast being reserved. Act now to secure your share of the benefits which only Leipzig offers.

For details, costs etc. write or phone: Embassy of the GDR, Commercial Section, 1717 Massachusetts Avenue, Washington, D.C. 20036,

Tel. 232 31 34, Telex: 892728 GDR EMB WAS or Leipziger Messeamt, DDR-701 Leipzig, Postfach 720, Telex 512 294.

#### **Electronics review**

System/370 mainframe computers, this software handles communications between computers and the data-communications network.

To work with the new releases, IBM added Release 3 of ACF/Network Control Program Virtual Storage software that runs in IBM's 3705 communications controller.

The new configuration flexibility made possible by this software comes from its provisions for multiple data routes between computers, parallel links between 3705 controllers, and extensions to the number of remote 3705s that can be connected to a computer. In addition, freestanding 3705s can now be remotely connected to a host computer's 3705 and interconnected to each other. This broadens configuration rules that previously required each 3705 to be locally connected to a computer and allowed only one remote 3705 connection.

Fail safe. A major function not previously available from IBM—nor from most of its current competition—is network reconfiguration in event of a hardware failure. Up to eight host computers can now share one 3705. Thus if one computer fails, another can take over control of the 3705 and drive the communications network. The new software also notifies operators when such a reconfiguration takes place.

Further increasing reliability are the new modems and the Network Problem Determination Application (NPDA) software. The new Model 3863, 3864, and 3865 modems operate at data rates of 2,400, 4,800 and 9,600 bits per second, respectively. Based on microprocessors, they can diagnose themselves upon command from the NPDA software, which can then isolate the problem to the modem, transmission line, or terminal involved.

The new modem models, which range in price from \$2,135 to \$5,300, are scheduled for their first deliveries in the first quarter of 1980. The software, which has license fees from \$32 to \$800 per month, will be available to users starting in mid-1980 and stretching into 1981.

-Anthony Durniak

# 6551. A choice like no other. ACIA and Baud Rate Generator.

#### **WE'VE MADE** IT SIMPLE.

Our 6551 Asynchronous Communications Interface Adapter is the world's most comprehensive ACIA. We made it that way by designing-in simplicity. It interfaces directly with 6500/6800 microprocessor families. And we've kept it small by eliminating unneeded synchronous protocols and conventions.

#### **ON-BOARD BAUD** RATE GENERATOR.

The 6551's on-chip programmable baud rate generator eliminates the need for external components and features 15 programmable rates up to 19.2 kilobaud. For non-standard baud rates (up to 125 kilobaud) the 6551 allows the use of an external 16X clock. This wide-ranging programmability allows accommodation of a variety of applications—from point-of-sale, financial and intelligent terminals to frontend processors, remote data concentrators, computer-to-computer links and more. Whatever your communications application, the 6551's built-in versatility delivers.

## BENEFITS, PLUS SOME.

It all adds up to higher reliability, lower manufacturing cost and lower system cost. Among the features that make it this way are:

■ Single +5 volt power supply

■ Requires only a standard 1.8432 MHz external crystal

Non-standard user-provided baud rates at 16X external clock frequency (up to 125 kilobaud)

Stop bits: 1, 1.5 (5-bit word) or 2

- Independently selectable transmit and receive baud rates
- Parity (odd, even, none, mark parity, space parity)
- Double-buffered transmitter and receiver
- Half or full-duplex operation
- Serial echo mode
- Interrupt feature and status register Find out how we can help you meet your needs. For information on

the SY6551 ACIA, contact Clement Lee, Microprocessor Group, Synertek, Inc., 3001 Stender Way, Santa Clara, California 95051. (408) 988-5614.


We've made it in production. We're making it in high technology.

TRANSMIT TRANSMIT DATA TRANSMIT SHIFT REGISTER INTERRUPT STATUS REGISTER CONTROL CONTROL **BAUD RATE** LOGIC GENERATOR REGISTER RECEIVE DATA RECEIVE SHIFT REGISTER **BUFFERS** COMMAND RECEIVE REGISTER

#### **5 SYNERTEK, INC.**


3001 Stender Way, Santa Clara, California 95051 (408) 988-5600. TWX: 910-338-0135.

### Rockwell is more than a builder of avionics for most of America's airliners.

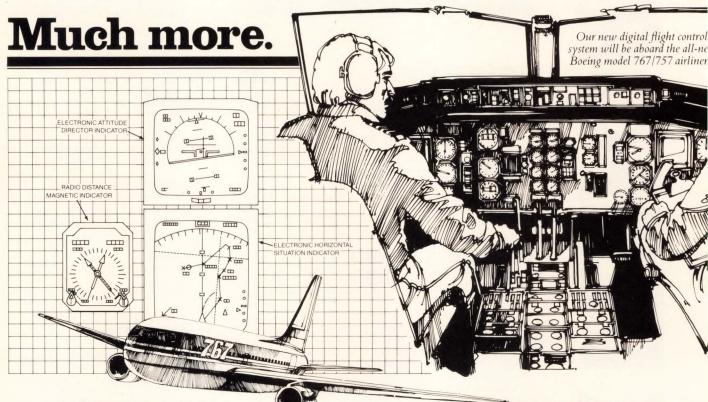

For most commercial pilots, the name Rockwell International stands for aviation electronics. Understandably so: Rockwell-Collins avionics equipment is on board nearly every U.S.-built airliner. And our Collins Air Transport Avionics Division has contracts to build avionics for Boeing model 767/757 airliners — programs planned to extend into the next century.

But avionics is only one of our strengths. Rockwell International is a major multi-industry company



#### Electronics.

(Sales, fiscal 1978: \$1.3 billion.)

As one of the world's leading suppliers of avionics, we provide communications, navigation and flight control equipment, not only for airliners, but for general aviation and government aircraft as well.

We also make microelectronic systems and devices, broadcast equipment, and guidance and control systems. And we manufacture and install telecommunications systems for businesses and governments worldwide.

#### Automotive.

(Sales, fiscal 1978: \$1.5 billion.)


One-half of the highway tandem tractors in North America are equipped with

Rockwell axles — and more than half of the heavy-duty trucks stop with Rockwell brakes. We're also a major supplier of drivelines, steel and styled aluminum wheels, mechanical devices, castings, stainless steel wheel covers,

reinforced plastic and other components for trucks, trailers, buses, vans and passenger cars.

Our new Cam-Master® "Q"® is the latest in the most widely used series of heavy-duty air brakes in the trucking industry. The "Q" is known as "the nosweat, no-tools brake," because its special design permits changing brake shoes without tools, in less than two minutes.

Rockwell's extensive product line of air, mechanical and hydraulic cam and wedge brakes is the result



in this Cam-Master "Q" brake can be changed in less than two minutes – without using tools.

Also aboard is our new Electronic Flight Instrument System which displays attitude and navigation data.

century of design, engineering and manufacturing experience. Our most popular brake designs have been proved on and off the highway in literally billions of miles on the job.

#### Aerospace.

(Sales, fiscal 1978: \$1.4 billion.)

We're prime contractor to NASA for its Space Shuttle orbiters and their main engines, and for

General Industries. (Sales, fiscal 1978; \$1.5 billion.) Rockwell is one of the world's largest suppliers of high-technology valves for the energy market and for

general industry. We also make print-

ing presses, textile equipment, power tools, industrial sewing machines, and products

for utilities, including over one-fourth of all the meters purchased by America's municipal water departments.

Our extensive technology is also being applied to the world's growing need for alternate sources of energy. We're involved in projects for nuclear energy, coal gasification, flue gas desulfurization, and solar, wind and geothermal power.

We also manufacture gas meters for industrial applications.

tions to within 30 feet, their speed to within a fraction of a mile per hour and the correct time to within a millionth of a second.

ous stream of signals, the system will

enable land, sea, air and space

navigators to determine their posi-

Over 14,300 scientists and engineers.

And our brand-new MPB Gas Flow

on a chip" technology, can be con-

nected directly to our meters to pro-

vide extensive, highly accurate

flow data at the push of a button.

Computer, the product of "computer

Of our 114,000 employees, one in eight is either a scientist or an engineer. They constitute about one percent of America's total scientificengineering community. This technological base positions us for leadership in each of our product areas. It also makes our corporate slogan, "... where science gets down to business," a fact.

#### Business is good.

Rockwell International's total sales for 1978 were \$5.67 billion. Fiscal 1978 was the most profitable year in Rockwell's history. Net income, up 23% over fiscal 1977, was \$176.6 million, generating a record \$5.02

per share.

Earnings per share

For more of the Rockwell story, please write us: Rockwell International. Dept. 815G, 600 Grant Street, Pittsburgh, PA 15219.



...where science gets down to business

Each Navstar's rubidium clock so accurate it will gain or lose no more than one second in 30,000 years.

Electrical power for the Navstar Global Positioning System satellites is provided by solar arrays which swivel to track and capture the sun's light.

integrating the entire Space Shuttle system including selected payloads. We also build rocket engines for many other applications, and several types of Earth-orbiting satellites. We also have a long, proud history as a designer and builder of business and U.S. military aircraft.

Our current satellite projects include "the brightest star in navigation history" - Navstar - designed and built by Rockwell for the U.S. Defense Department's Global Positioning System (GPS). When fully operational in the mid-1980s, GPS will utilize 24 Navstar satellites orbiting 11,000 miles above the Earth. Beaming a continu-

Rockwell's new digital gas flow computer. Thousands of computations are performed in seconds -

continuously calculated to ten places.

A PARTY

# The TEAC Super Performers

TEAC has a complete line of cassette data recorders to answer all your data acquisition needs. For field work there's the ever-popular R-61. Ruggedly built to stand up under demanding conditions, it is fully portable and easy to handle. It provides four channels of precision recording capability, two of which can be switched from the standard FM recording mode to DR (direct recording) operation for use with high frequency data.

For precision lab work consider the full-feature R-81. Its seven channels and four speeds provide you with a great deal of operation flexibility.

Choose either the R-61 or the R-81 and you can be sure of getting the performance and reliability that TEAC is famous for.



U.S.A. B.J. Wolfe Enterprise Inc., 10760 Burbank Blvd., North Hollywood, Calif. 91601 Tel: (213) 877-5518 Canada R.H. Nichols Co., Ltd., 214 Dolomite Dr., Downsview, Ont. M3JZP8 Tel: (416) 661-3190 Hongkong Dah Chong Hong Ltd., Hang Seng Bank Bldg., 77 Des Voeux Road, Central Tel: 5-261111, 5-226258 Australia & New Zealand Jacoby Mitchell Ltd., P.O. Box 70, Kingsgrove N.S.W. 2208, Australia Tel: 6307400 South Africa Mayfair Sales (Pty) Ltd., Marshalltown 2107, Transvaal Tel: 011-834-2131 Betgium & Luxemburg Simac Electronics S.P.R.L., Triomfiaan 148 1160 Brussel Denmark Danbit, Plantagevej 23 DK-2680 Solrod, Strand Tel: (03) 141515 France Tekelec Airtronic S.A., Cite des Bruyeres, Rue Carle-Vernet 92, Sevres Tel: (027) 7536 Holland Simac Electronics B.V., Veenstraat 20, Veldhoven Tel: 040-533725 Italy A.E.S.S.E. S.R.L., Corso Lodi, 47 20139 Milano Tel: 54.64.741-2-3 Switzerland Wenger Datentechnik, Güterstrasse 253 CH-4053 Basel Tel: 061-34 50 96 Spain Ataio Ingenieros S.A., Madrid-16, Enrique Larreta 12 Tel: (215) 3543 Sweden teleinstrument ab, Maltesholmsvagren 138, Box 490, 16204 Vallingby Tel: 08-380 370 United Kingdom International Instruments Ltd., 92 High Street, Berkhosted, Herts HP4 2BL Tel: 044275959 West Germany & Austria nbn Electronik Starnberg, 813 Starnberg, Max-Emanuel-Str. 8, West Germany Tel: (08151) 13036

Circle 56 on reader service card

#### Washington newsletter.

#### DOE picks nine for photovoltaic system projects

Nine new photovoltaic demonstration projects worth \$21.5 million were selected by the Department of Energy in mid-June for contract negotiation. Topping the list of industrial contractors, General Electric Co.'s Philadelphia-based Advanced Energy Programs operation gets \$3.4 million to build a 110-kw concentrator system for Orlando, Fla.'s Sea World. A Phoenix public utility, the Arizona Public Service Co., pulled down the biggest award—\$6.5 million—for a 283-kw concentrator system to power that city's Sky Harbor International Airport.

Two 15-kw projects, each worth \$2.7 million, are also on the list: Solar Power Corp., Woburn, Mass., which will produce a flat-panel array to power the Beverly, Mass., High School, and New Mexico's Lea County Electric Cooperative, which will employ similar technology to power a shopping center at Lovington. Science Applications Inc. of McLean, Va., got \$2.5 million for a 150-kw flat-panel array at Oklahoma City's Center for Science and Arts.

Other contractors also selected for negotiation from the 29 proposals were (with proposed cost and output): E-Systems Inc., Dallas (\$650,000/27 kW); DBM Corp., Albuquerque, N. M. (\$1.1 million/47 kW); Acurex Corp., Mountain View, Calif. (\$1.4 million/85 kW), and New Mexico State University, Las Cruces (\$480,000/17.5 kW). All systems have a 1986 break-even cost goal.

#### Recession signs in May downturn of consumer sales

Recession? Not yet, but May home-entertainment electronics sales to dealers show that retailers are getting ready by reducing inventories. Color TV sales, an economic bellwether, slipped 3.3% in May from last year's 673,632 units, cutting volume in 1979's first 21 weeks by 0.7% from 1978's nearly 3.66 million. TV sales figures for the first June week, however, are up 5% from 1978, suggesting a firm trend has yet to be established. Home video cassette recorders, another high-dollar item for consumers, recorded their second consecutive monthly sales drop in May, off 6.2% from the nearly 28,000 units sold by dealers last year, following a 21% decline in April, according to data gathered by the Electronic Industries Association.

#### FCC's Darby quits as bureau chief; others to follow

Dissatisfaction with the reign of Federal Communications Commission Chairman Charles D. Ferris and a group of his close advisers has led to the resignation of Larry F. Darby from his position as chief of the common carrier bureau, effective June 30, along with Darby's chief economist, Walter Bolter. Other key staff departures are expected to follow. Darby cites only "personal reasons" for his departure from the job he held just 10 months. He will be succeeded by Philip Verveer, broadcast bureau chief. However, other senior FCC personnel say staff morale and effectiveness are the lowest in memory as a result of Ferris and his close-knit staff's issuance of directives directly to bureau workers that often counter those of their immediate superiors.

Meanwhile, the FCC has modified its May restrictions on General Telephone & Electronics Corp.'s acquisition of financially troubled Telenet Corp., Vienna, Va., so that GTE may compete with AT&T's Advanced Communications Service in the high-speed data packet transmission market. In an exchange of stock worth about \$65 million, GTE would acquire Telenet provided it remains a separate entity with separate books.

#### Washington commentary.

#### The war over electronic mail

The board of governors of the U.S. Postal Service appears to be backing away from Postmaster General William Bolger's proposal to compete with private services in electronic mail [Electronics, Dec. 7, 1978, p. 58]. The post office "will not seek to become a telecommunications common carrier" and "will not duplicate facilities available to it in the private sector," the governors said in a policy statement published this month. For many in the data-communications industry, however, this is not good enough in view of what the governors are saying that the USPS will do.

"Electronic mail services offered by the postal service will involve acceptance of messages in hard copy, magnetic tape, or electronic forms; transmitting the messages [under contract with private sector communications companies] to destination postal stations; and printing and enveloping the message for delivery," the governors of the postal service said. "Any telecommunications company desiring to offer an electronic mail service can connect with our delivery system for hard-copy delivery."

#### Opposing the post office

The reactions of the telecommunications industry to those statements are strong. "Dealing with the post office will be like dealing with the Bureau of Customs," complains one lobbyist. "They will set the law, interpret the law, and adjudicate the law. It won't work." Another argues that "letting a tax-free Government entity with enormous resources into the private marketplace is absurd." The Computer and Communications Industry Association contends that even the prospect, much less the reality, of postal entry into electronic message service "has a chilling effect on competitive firms and their ability to attract capital."

The effort by the postal governors to assuage industry and congressional opposition to its electronic message service plans is not being swallowed by anyone. The fact that USPS says it will get into electronic mail at all "is a camel's nose in the tent if I ever saw one," says John Sodolski, vice president for the Electronic Industries Association's communications division.

Industry's criticisms of the plans have consid-

erable congressional support [Electronics, June 7, p. 63]. Chairman Harley Staggers (D., W. Va.), whose House Interstate and Foreign Commerce Committee is responsible for telecommunications issues, has joined leading Senate opponents. He wrote to President Carter expressing concern about "action that might be taken that would overturn years of governmental policy and legislative history that have prohibited the postal service from providing telecommunications services and left such services to private enterprise." He cited the USPS tax-free status, its "ever-growing monopoly," and "the potential for cross-subsidization" of electronic mail by monopoly services as "unfair advantages."

#### White House reaction

The nearly unanimous opposition to USPS entry into electronic mail clearly has caught the White House by surprise. President Carter delayed issuing a policy review memorandum beyond the mid-June deadline that White House staff members had themselves imposed. "He's in a box on this one," notes one telecommunications specialist somewhat smugly. "Congress has to legislate on postal policy, and with every responsible committee chairman on the record as opposed to USPS plans, does the President have any choice? Carter has alienated so much of the Congress on so many issues, he can't afford to lose another."

Nevertheless, the President does have a choice. And anyone who has tracked Jimmy Carter's record of contrary responses knows that this is not the time to assume the war between the post office and the private competitive sector has been won. Postmaster General Bolger is still pushing his plans for electronic mail despite the USPS governors' most recent proposal to cut private industry in for a piece of the action.

What was said in this space last December is worth recalling: if the electronic message service system and its supporting technology are to develop successfully, they must do so in a free and open competitive market in which USPS participation is limited to those unique services that cannot be duplicated by industry.

-Ray Connolly



#### Solve design problems simply with 1.5 Amp Interface ICs for Negative Supply Applications.

You can use Sprague Electric's new Series UDN-2840B 1.5 amp monolithic quad power drivers in three basic versions to solve your circuit needs for (1) sinking applications, (2) source applications, and (3) com-

bination sink-and-source applications.

You can get this versatile IC family with either 5V logic compatibility or 12-15V MOS compatibility. Make your choice from these six types:

TYPE	I <sub>OUT</sub>	V <sub>OUT</sub> (OFF)	OUTPUTS	V <sub>SUPPLY (TYP)</sub>	COMPATIBILITY	TYPICAL APPLICATIONS
UDN-2841B	1.5 A	-50 V	Sink (4)	0 V to 5 V	5 V Logic	electrosensitive printer interface
UDN-2842B	1.5 A	-50 V	Sink (4)	0 V to 12 V	PMOS, CMOS	
UDN-2843B	-1.5 A	−50 V	Source (4)	5 V	5 V Logic	solenoid, LED, or relay drive
UDN-2844B	-1.5 A	-50 V	Source (4)	5 V to 12 V	PMOS, CMOS	
UDN-2845B	1.5 A/-1.5 A	-50 V	Sink (2) Source (2)	5 V	5 V Logic	bridge motor drives
UDN-2846B	1.5 A/-1.5 A	−50 V	Sink (2) Source (2)	5 V	PMOS, CMOS	

All Series UDN-2840B power driver ICs include input current limiting, level translation, and sufficient amplification to operate high current Darlington out-

puts. The Sprague-originated 16-lead webbed dual inline package is used for maximum power dissipation.

For application engineering assistance on these or other interface circuits, standard or custom, write or call George Tully or Paul Emerald, Semiconductor Division, Sprague Electric Co., 115 Northeast Cutoff, Worcester, Mass. 01606. Telephone 617/853-5000.

For Engineering Bulletin 29314 and a 'Quick Guide to Interface Circuits', write to: Technical Literature Service, Sprague Electric Company, 35 Marshall Street, North Adams, Mass. 01247.

For the name of your nearest Sprague Semiconductor Distributor, write or call Roger Lemere, Sprague Products Co., North Adams, Mass. 01247. Telephone 413/664-4481.

#### FOR FAST INFORMATION, CALL YOUR NEAREST SPRAGUE SALES OFFICE:


ALASAMA, Sprague Electric Co., 205883-550-9 ALZIONA, Sprague Electric Co., 60279-5435 • CALEFORNIA, Sprague Electric Co., 213649-2800, 714:549-9913, Wm. J. Purdy Co., 415:647-7701; KOE Corp., 714:549-9913, Wm. J. Purdy Co., 415:647-7701; KOE Corp., 714:549-9913, Wm. J. Purdy Co., 415:647-7701; KOE Corp., 714:78-7801 • OLIORADO, Wm. J. Purdy Co., 303:777-7141 • CONNECTICUT, Sprague Electric Co., 203:61-2551; Ray Perron & Co., 130:628-9631 • DIST. OF COLUMBIA, Sprague Electric Co., 303:727-781 • CONNECTICUT, Sprague Electric Co., 305:831-3636 • LLIMOIS, Sprague Electric Co., 310:295-6620; D. Dolin Sales, 312:286-6200 • IRDANA, Sprague Electric Co., 317:283-4247 • MASSACHUSETTS, Sprague Electric Co., 317:893-9100, Sprague Electric Co., 413:664-4411 • MICHIGAIN, Sprague Electric Co., 317:873-393. • MINNESOTA, HMR, Inc., 517:831-7400 • MISSOURI, Sprague Electric Co., 413:664-4411 • MICHIGAIN, Sprague Electric Co., 318-427-7400 • MISSOURI, Sprague Electric Co., 418:664-4411 • MICHIGAIN, Sprague Electric Co., 418:647-4410 • MISSOURI, Sprague Electric Co., 418:467-4410 • MISSOURI, Sprague Electric Co., 418:467-4525. Irinale Sales inc., 418:484-4410 • MISSOURI, Sprague Electric Co., 418:467-5252. Irinale Sales inc., 418:484-4410 • MISSOURI, Sprague Electric Co., 418:467-5252. Irinale Sales inc., 418:484-4111 • CANADA, Sprague Electric Co., 418:467-5252. Irinale Sales inc., 418:484-4111 • CANADA, Sprague Electric Co., 418:467-66-6123 or 613:238-2542.





... and you thought we only make great capacitors.

# HP's New 1300 MHz Network Analyzer:

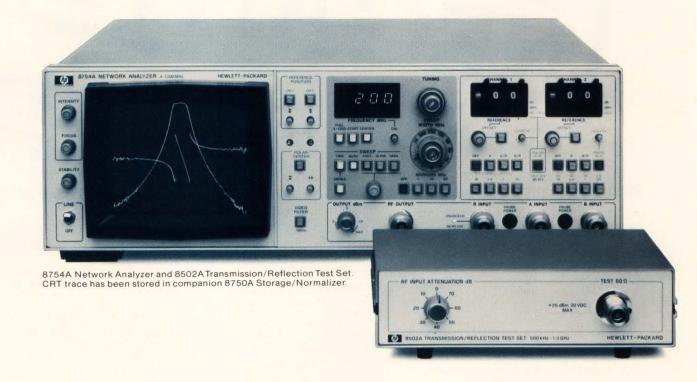


# When your RF network measurement needs are large, but your budget isn't.

# HP's new 8754A Network Analyzer brings speed, convenience and economy to RF measurements. It costs only \$11,500 and consists of:

- □ Built-in 4-1300 MHz swept source with +10 dBm leveled output, calibrated sweeps and crystal markers.
- □ Three channel receiver to measure any two transmission or reflection parameters simultaneously with > 80 dB dynamic range.
- CRT display for fully calibrated rectilinear and polar plots with resolution to 0.25 dB and 2.5° per major division.

Just add the test set appropriate for your application and you're prepared to make thorough and accurate measurements quickly and easily. Here are just a few of the things you can do with the 8754A:


#### **Transmission Magnitude** and Phase



It's easy to measure loss, gain and phase shift using just

the 11850 Power Splitter (\$525). You can completely identify filter passbands and skirt characteristics without misleading harmonic or spurious responses.

#### Simultaneous Transmission and Reflection




Using the 8502 Test Set (\$1850) you can see the trade offs between transmission gain or loss and input match in a single test setup. For complete two-port characteristics of networks, including devices like transistors, an S-parameter test set is available.

#### **Impedance**



Measure and display impedance in polar form with convenient Smith Chart overlays. Test sets are available for both 50 and 75 ohm systems. The 8754A's crystal

markers give precise frequency data. In addition, probes are available for in-circuit measurements.



#### Add a storage/ normalizer and increase the 8754A's capabilities even more!

The HP 8750A Storage/Normalizer can automatically remove system frequency response variations. And you can make comparison measurements easily because normalization directly displays the difference between two responses. The 8750A's digital storage permits flicker-free displays, even for measurements requiring slow sweep rates.

Best yet, all this capability is offered at an affordable price. A call to your nearby HP field sales office is all you have to do to get more information, or write.

Domestic US prices only.



King Carl XVI Gustav of Sweden on the right in these photos—presents the 1978 Nobel Prize in Physics to Bell Laboratories scientists Robert Wilson (top photo) and Arno Penzias.

# What does the Nobel Prize have to do with your telephone?

The two scientists on the opposite page are receiving the highest honor a scientist can earn—the Nobel Prize. They are the sixth and seventh laureates who did their prize-winning research at Bell Telephone Laboratories. These scientists shared a common goal—the search for new knowledge to further advance the art of telecommunications.

Clinton Davisson shared the Nobel Prize in 1937 for demonstrating the wave nature of matter. In 1956, John Bardeen, Walter Brattain and William Shockley were honored for their invention of the transistor. Philip Anderson's theoretical work on amorphous materials (such as glass) and on magnetism led to a Nobel Prize in 1977. And in 1978, Arno Penzias and Robert Wilson received the Prize for detecting the faint radiation from the "big bang" explosion that gave birth to the universe some 18 billion years ago.

#### The search for knowledge

These scientists and their colleagues at Bell Labs, given the freedom to explore, have proved

time and again the value of investment in research—not only for telecommunications but for society in general. The transistor, for example, revolutionized communications and brought into being entire new industries—indeed, a new industrial society—based on solid-state electronics.

Other Bell Labs advances—products of this same research environment—have included high-fidelity recording, sound motion pictures, long-distance television transmission in the United States, the electrical digital computer, information theory, the silicon solar cell, and the laser. The impact of this work—on almost every field of commerce, industry, education and even medicine—has been incalculable.

#### The innovation process

Research done at Bell Labs in the past is the basis for the products and services the Bell System offers its customers today, just as the research going on now is the foundation for tomorrow's telecommunications.

Bell Labs scientists specialists in physics, chemistry, mathematics and many other disciplines—team their efforts with those of our systems, development and design engineers. They, in turn, work closely with Western Electric manufacturing engineers and with the people of the Bell System operating telephone companies.

This technical integration is the foundation for true innovation. One idea feeds another. A basic scientific discovery can make possible entire new technologies and products for telecommunications, and a concept for a new product or system can stimulate the research to find even more new knowledge. That interaction, that teamwork, has been extremely productive: Bell Labs people have received 18,645 patents between our founding in 1925 and the end of 1978.

Sometimes, the search for knowledge may lead to a Nobel Prize. Often, it benefits all of society. And always, its ultimate aim is better service for Bell System customers.

Bell Laboratories 600 Mountain Avenue Murray Hill, N.J. 07974



Keeping your communications system the best in the world.



## A report on electro optics: Low cost GaAs IR emitters.

# RCA offers a line of standard IR emitters that cost under \$1.00 for volume orders.

No matter what the price, every electro optic product RCA makes must meet our high standard for reliability.

In gallium-arsenide IR emitters, that standard results in a mean time before failure far greater than 100,000 hours.

#### Variety of applications.

Sealed in a rugged hermetic package, RCA IR emitters are interchangeable with most standard types.

They're compatible with silicon phototransistors or photodiode detectors. And designed for a wide range of industrial applications.

Including: card and paper tape readers, shaft encoders, intrusion alarms, high speed sorting and counting, smoke detection, and optical switches.

#### Pulsed or continuous.


For continuous DC or low-current pulsed operation, you can choose the SG1009 series. Or for high-current pulsed operation, the SG1010 series.

Power outputs are 4 mW minimum, 7 mW typical for continuous wave operation. Up to 200 mW for pulsed power output.

Both types are available with glass lenses for a narrow beam pattern, 8° half angle beam spread at 50 percent intensity points, or with simple flat glass windows for 30° beams.

#### Minis for close mounting.


If space is a problem, consider our minis (SG1002, SG1003,

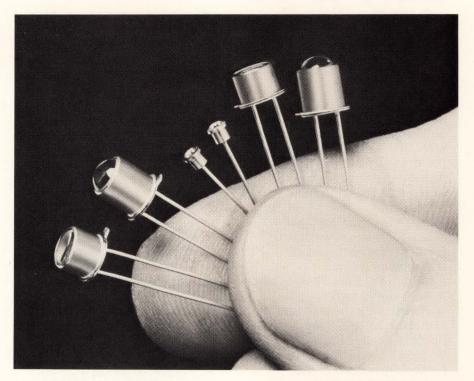

SG1004). They exhibit the same wavelength characteristics as the above types.

Yet the extremely small size of these devices (.095 inches, overall diameter) permits close mounting dimensions with a minimum of cross coupling.

Typical spectral radiant flux (percent).



Power outputs range from 1 mW to 2.4 mW minimum for continuous operation. And from 24 mW to 40 mW typical for pulsed operation.

An integral reflector in the OP-10 package used for these devices focuses output to a 15° half angle at 50 percent intensity points.

#### Large quantities available.

No matter what your application, RCA can probably provide an emitter to meet your needs.

And we can deliver as many as you need from stock.

For further information on the RCA line of IR emitters, contact RCA Electro Optics and Devices, Lancaster, PA. Buenos Aires, Argentina. Brussels, Belgium. Sao Paulo, Brazil. Ste. Anne-de-Bellevue, Quebec, Canada. Sunbury-on-Thames, Middlesex, England. Stuttgart, W. Germany. Mexico 16 D.F., Mexico.

#### International newsletter.

# Will RAMs replace scan tubes in radar displays?

Scan converter tubes, long used to transform radar images into bright television displays, may become yet another victim of low-cost semiconductor memory. At the Paris air show that ended earlier this week, Thomson-CSF showed the prototype of a digital scan converter based on a 4-megabit picture-element store of 16-K random-access memories. Controlled by a fast microprocessor, the converter reads digitized radar video signals into the 1,024-by-1,024-pixel store and then reads them out as a high-resolution TV raster display—875 lines or more per frame. Thomson says the digital converter will be more expensive at the outset than tube converters, but the difference in cost will be more than offset over the equipment's life because there is no tube to change every 20,000 hours or so. Furthermore, synthetic displays of alphanumerics and symbols can be added easily on the raster display.

# Hitachi weighs in against 4300 series with three models . . .

The latest Japanese response to IBM's 4300 series of medium-sized mainframes comes from Hitachi Ltd., which promises January deliveries of three additions to its Hitac M series. The new models use dual disk drives with a capacity of 635 megabytes per spindle and a data transfer rate of 1.198 megabytes/s. The new M-140H has a main memory of 0.5 to 2 megabytes and a 5-megabyte/s channel transfer rate. It uses firmware to replace the main portions of the virtual operating system, thereby reducing running time of the control program by 15% to 20%. The M-150H has a main memory of 1 to 4 megabytes and a 5.5-megabyte/s channel transfer rate; the M-160H boosts these specs to 2 to 6 megabytes and 7 megabytes/s. For the 140 and 150, optional high-speed execution units can double performance.

# . . . that use 64-K RAMs, to be sold commercially

Hitachi's three new computers will use 64-K single-power-supply random-access-memory chips, which are also being employed to boost capacity in the Hitac L series of smaller mainframes. The company will supply samples of its HM4864-3 64-K dynamic RAM by the third quarter. The chip operates from a single +5-V power supply and has a 200-ns maximum access time and a 375-ns minimum cycle time. Power dissipation is 300 mW, and the 128 refresh cycles each take 2 ms. Hitachi says it will deliver the new memory to Nippon Telegraph and Telephone Public Corp. in December for use in file-control equipment; but the company will be pursuing sales worldwide, especially in the U. S. The chip comes with pin 1 unconnected, as does Texas Instruments' 64-K RAM.

#### Microcontroller uses self-optimization to regulate building heat

A 20% to 40% slash in building heating costs is the promise held out by a microprocessor controller with self-adaptive software now being launched in Europe by Honeywell Inc. Developed by the firm's Dörnigheim, West Germany, unit, the Micronic 100 is intended for such uses as office buildings, where optimum turn-on and -off times for the heat can realize important fuel savings. The software, which runs on an Intel 8085, learns from experience, automatically adjusting for outdoor temperature, length of time the building has been vacated, and differences in thermal performance in different buildings. It is probably the first commercial product to use a self-optimized microcontroller. Elsewhere, an Oxford University laboratory is working on applying the technique to nonlinear processes and those with long time-constant controls [Electronics, June 22, 1978, p. 67].

#### International newsletter

#### Diode laser offers 1.3-μm wavelength, 5-mW output

Long-distance, high-capacity optical transmission systems will get a boost with Hitachi Ltd.'s new indium-gallium-arsenide-phosphide laser operating at a 1.3-\mu wavelength and an output of 5 mw. The new devices make possible data rates of more than 1 gigabit per second over distances between repeaters of up to 50 km. Two models will be available in September, initially in small quantities: the HLP 5400 (U), for experimental use, and the HLP 5500 (U), which has a short length of optical cable for splicing to a transmission line. The company will say only that single-quantity prices will range from \$1,800 to \$2,700.

#### GaAs wafers slated for mass production for FET applications

Sumitomo Electric Industries Ltd. says it will now mass-produce gallium-arsenide wafers for field-effect transistors with a thin active epitaxial layer on a semi-insulating substrate. The epitaxial layer is grown on a buffer layer in a vertical tube (furnace), so the firm can process batches of 3 to 10 times as many wafers as can be handled with conventional, horizontal tubes. The characteristics of the final devices are highly dependent on those of the epitaxial layer. By careful process control, the impurity level of the epi layer is down to 1 part in 10 billion, and the variation in thickness is held to between 200 and 300 angstrom units. Current price is almost \$1,000/in.², but the company expects it to be at most \$100/in.² by 1982.

# FETs slash resistance with molybdenum gates

Molybdenum gates are featured on the high-frequency n-Mos power field-effect transistors, samples of which are just now coming from Hitachi Ltd. Two devices with a 100-w dissipation and 160- and 200-v ratings are available. They are similar to Hitachi's earlier polysilicon-gate power Mos FETS [Electronics, May 12, 1977, p. 56 or 6E] but the molybdenum gates have one tenth the resistance, thus decreasing the RC time constant. Transconductance is substantially flat out to 30 MHz, and amplifiers have been built with a gain fallout of only 3 dB at 100 MHz. The devices, which do not suffer from current hogging, are especially suited to parallel operation at very high frequencies. They are also suited to high-frequency switching applications, including switching regulators, since they are immune to current storage effects. Hitachi expects to supply samples of complementary p-channel devices in September.

#### Addenda

Bankruptcy proceedings for Denmark TV maker 3-F have begun, marking the final blow to the plant's employees, who have been struggling to maintain production. They had already ceded majority control to a Hungarian-controlled group, which simply stopped pouring money into the operation. Reorganization attempts are likely. . . . Digital Equipment Corp., Maynard, Mass., is setting up a European technical assistance center in Valbonne, the French Riviera electronics center [Electronics, July 6, 1978, p. 92]. Thirty specialists are to be on hand when the center opens in October. . . Marconi Instruments Ltd. is stressing an enhanced digital test circuit capability for its new Autotest System 80, which can check out a board's components through a 512-pin bed of nails. The company cuts the cost of the in-circuit tester by using an LSI-11 microprocessor instead of a minicomputer and boosts its speed by shifting from interpreter- to compiler-driven software.

# More for Less

More triggering facilities. More accuracy. More touches of human engineering. But the 'more' in every Philips scope actually costs you less. Take the PM3214 for example.

The PM3214 25MHz/2mV dual trace alternate time base oscilloscope has all the triggering facilities found on the latest, most expensive scopes, but the price is only \$1,445\* And it's portable. That's more for less!

Complete triggering facilities include AC, DC, TV and an Auto position that derives its trigger from the peak to peak value of the incoming signal. Trigger selection is available from either channel, line or external source as well as composite triggering for asynchronous signals.


Our alternate time base display shows main and delayed sweep simultaneously, eliminating back and forth switching. You can even use DC triggering on both time bases.


If you're willing to settle for less than an alternate time base 25MHz scope, get our PM3212. It still gives you more-all the triggering and overall performance of our PM3214, but the price is only \$1,195\*


If you want more in a scope, come to Philips. More is better.

For More Facts or a Convincing Hands-On Demonstration, use our toll-free number, (800) 631-7172 in the continental U.S. In New Jersey, please call collect, (201) 529-3800. Or contact Philips Test & Measuring Instruments, Inc., 85 McKee Drive, Mawah, New Jersey 07430.

\*U.S. Domestic Price Only.

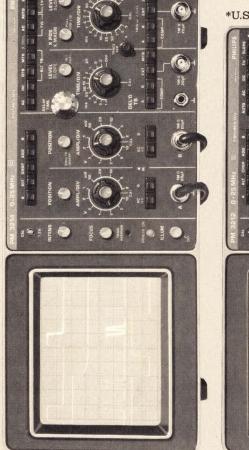


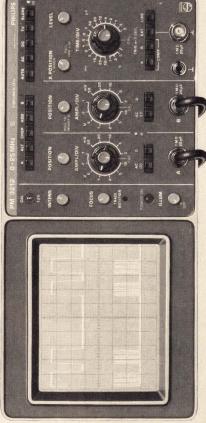



**PHILIPS** 

# Varo's 60 amp Schottky rectifier adds a new twist for long term performance and reliability.

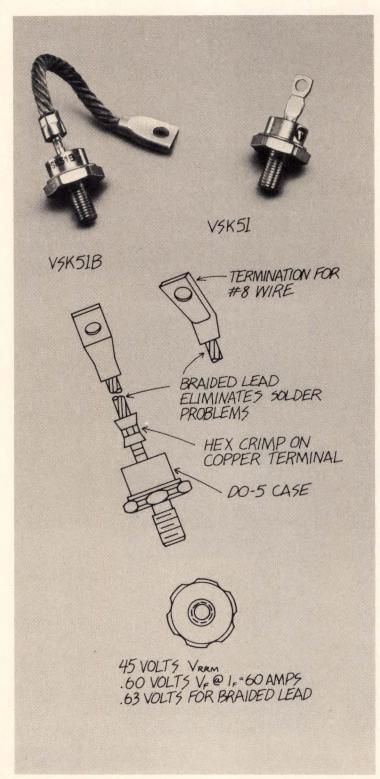

Look to Varo for the most complete line of Schottky power rectifiers: an on-the-shelf product line of fast recovery, low forward drop devices from 1 to 40 amps in a variety of case styles. Look to Varo for a new twist in a 60 amp Schottky rectifier: a standard DO-5 case with a braided lead.

Varo's new VSK51B (braided lead) is an economical package offering long term reliability by eliminating potential terminal seal breakage, internal solder reflow and cold solder joints. Its one step assembly with #8 wire assures minimum power loss.

In quantities of 100: the VSK51 costs \$5.50; the VSK51B (braided lead) costs \$7.40.

For specs or pricing on any Varo device, call: (214) 271-8511 VARO Semiconductor, Inc.; Box 40676; Garland, Texas 75040.



# The world's leading rectifier company

Customer Service	7A
Varo Semiconductor, Inc.	(^
Box 40676; Garland, Texa	as 75040
Please send me:	
☐ Specs and pricing on:_	
Mucaplication is	
My application is:	
Name	
Company	
Address	
City	
State	Zip
Phone	

# Amorphous silicon shows promise for flat-panel TV display

by Kevin Smith, London bureau manager

Thin-film insulated-gate field-effect transistors seem to meet the needs for controlling liquid crystals

An idea for a flat-screen liquid-crystal TV display first proposed by Westinghouse Research Laboratories, Pittsburgh, in 1973 is being resurrected by research workers at Dundee University's Carnegie Laboratory of Physics, but with a new twist. In an experimental project now getting under way, a research team headed by Prof. Walter E. Spear hopes to solve some of the problems that brought the earlier project to a stop by using amorphous silicon.

The Westinghouse team under T. P. Brody aimed to produce an experimental flat-screen display for low-resolution TV pictures using a combination of thin-film transistors and nematic liquid crystals. They designed a 6-by-6-inch display with 20 lines per inch and 14,000 picture elements, each driven by a thin-film cadmium-selenide transistor.

But, says Spear, "the difficulties of controlling a two-component thinfilm material are very considerable. It may well be simpler to control an elementary material such as silicon." In fact, Spear has recently reported in the literature on amorphous-silicon insulated-gate field-effect transistors (IG FETs) that have encouraging electrical characteristics.

Requirements. To drive their liquid-crystal elements, the Westinghouse team needed a thin-film transistor with an on-to-off-current ratio

of 300, an on-resistance of less than 9 megohms to allow sufficiently rapid charging of the element, and an off-resistance of greater than 3,000 M $\Omega$  to prevent excessive charge decay between scans. Says Spear, "amorphous-silicon IG FETs readily satisfy those requirements."

His team is now working to scale up their process, determine reproducibility, and establish likely yields.

The process starts by evaporating a series of thin aluminum-gate electrodes about 100 micrometers wide onto a glass substrate (see part a of diagram). An insulating siliconnitride layer 0.5 to 1  $\mu$ m thick is then deposited by the decomposition of a mixture of silane and ammonia in radio-frequency glow discharge.


Next, an amorphous-silicon layer about 1  $\mu$ m thick is deposited on the silicon nitride, also by a glow-dis-

charge technique. Finally, the required pattern of source and drain contacts is evaporated onto the amorphous-silicon surface. So far, source-to-drain separations have been from 30 to  $66 \mu m$ .

Display. In an assembled LCD, the liquid crystal would be sandwiched between the amorphous-silicon surface and a conducting glass window (see part b of diagram).

Moves to scale the process up have gone well, according to P. G. Le Comber, one of the researchers. Adds Spear, "Long-term device stability may be better than the group III-V compounds used previously." Specimens have been stored at room temperature for several years without showing any significant change. Both controllability and reproducibility look good, he says.

If the group succeeds in producing

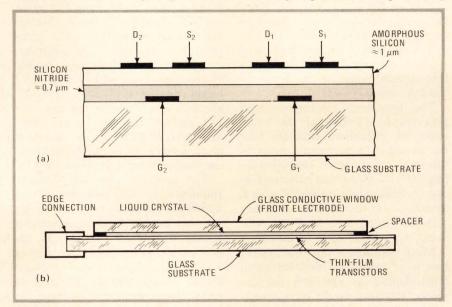

**TO KUM.** A Dundee University research group is working on amorphous-silicon IG FETs (a) and thinks it may be possible to use them to make a flat-panel LCD (b).

#### **Electronics international**

suitable matrix arrays, they will probably work with another laboratory that has the skills needed to develop a full display complete with driver electronics. In an integrated display, the IG FET is connected at each junction of the X-Y matrix. In operation, amplitude information, possibly stored in a charge-coupled-device buffer, is discharged onto

each column in turn. Meanwhile a scanner turns on all transistors in an addressed row.

As a result, a voltage proportional to brightness would be applied to each liquid-crystal element in that row. The applied voltage rotates the plane of polarization of the element, altering the light transmitted through it.

#### Japan

#### Hitachi, VLSI coop lab readying E-beam units to print 0.5-μm lines

As part of its efforts toward very large-scale integration, Japan's VLSI Cooperative Laboratory has worked with Hitachi Ltd. on two electron-beam exposure units capable of producing lines as thin as 0.5 micrometer.

One is an electron-beam pattern generator with a spot size of only 0.1  $\mu$ m for direct lithography on wafers, designed by the lab and built by Hitachi. With this type of machine, minimum line widths of the pattern should be at least four spot diameters and corners should be reasonably sharp. Thus the minimum line width of the new system is on the order of 0.5  $\mu$ m.

Making the small spot size possible is a newly developed field-emission electron gun, or cathode. The size of the spot from which it emits electrons is only 0.01  $\mu$ m across—a lens system magnifies the beam to yield the final spot size.

The high beam current produced plus vector scanning of the beam make the machine extremely fast. For example, in a demonstration of the unit's capabilities, the lithography for the aluminum metalization of a ½ linear scale replica of a 16-K dynamic random-access memory chip measuring 0.83 by 0.42 millimeter was completed in 15 seconds.

Most advantages the new system has over previous electron-beam units depend on the new electron source. Rather than the heated tungsten hairpin or lanthanum-hexaboride thermal cathodes of previous

systems, the unit uses an unheated tungsten-chip cathode from which an electron field of 10 megavolts per centimeter literally pulls out electrons

Operation of the cathode at room temperature means that the system reaches thermal equilibrium almost immediately, eliminating the need for warmup. Still, the beam current of 40 nanoamperes is some 10 times larger than that of thermal cathodes and more than 100 times larger than the field-emission cathodes used in electron microscopes.

More benefits. A field-emission electron source yields at least three other advantages. For one, all electrons in the beam have the same energy, eliminating the chromatic aberrations encountered with conventional cathodes. In addition, magnification of the beam, instead of reducing it as with a physically larger, thermal cathode, permits the use of a much smaller column with two rather than the usual three magnetic electron lenses. Furthermore, essentially all the beam starting toward the target reaches it.

The tungsten chip has a small rounded tip. Although the voltage applied to the electrostatic accelerating lens is only 3 to 5 kilovolts, it causes a field of 10 MV at the pointed end of the chip. A current of 100 microamperes flows, of which 40 nA is available as the electron beam. This current can be increased severalfold by moderate heating, even though the temperature is still

far lower than that needed for thermal emission. The noise component of the beam is typically less than 5%.

The system is designed for writing directly on wafers up to 3 inches in diameter. The area over which the beam can be deflected is variable between 2 and 5 mm square, and the stage is moved to expose the remainder of the wafer.

**Performance.** Use of a 16-bit digital-to-analog converter gives a resolution of 0.03  $\mu$ m for a 2- $\mu$ m-square field; it is correspondingly coarser for larger fields. The writing speed is adjustable between 1 mm and 1 meter per second, depending on the sensitivity of the resist.

The resolution capability in sensing alignment, using back-scattered electrons, is 0.01  $\mu$ m. A laser senses table position, also to within 0.01  $\mu$ m, and maximum error for the overlay registration at 1  $\sigma$  is again 0.1  $\mu$ m

Hitachi has said it will take orders for this system if an agreement can be reached on price and other terms. The company refuses to discuss a figure, though, saying that it has not yet decided on the price.

**Projection.** The VLSI lab and Hitachi are also developing a projection step-and-repeat electron-beam lithography machine similarly capable of producing lines 0.5  $\mu$ m wide, or even thinner. This system uses a stencil-like pattern cut into a 3- $\mu$ m thick nickel mask and projects a shower of electrons having the same pattern with linear dimensions reduced to one fourth.

The nominal size of the masks used is 12 by 12 mm, yielding a field size of 3 mm square after reduction. Resolution is  $0.2 \mu m$ , and alignment is accurate to within  $0.2 \mu m$ . The speed is said to be about 3 seconds per chip for polymethyl methacrylate (PMMA) resist, including the shift of the table for the next chip.

The innovative use of a relatively small beam of parallel electrons plus a raster scan to cover the entire mask, rather than a large flood beam, permits the design of a dramatically smaller machine.

Systems built with a flood beam require electron lenses with diame-

ters many times that of the beam in order to reduce distortion through the beam's cross section. In general, the height of the system must be scaled up along with the diameter, and the resulting system becomes so large that, in a factory building, it extends through the ceiling into the floor above.

With a smaller beam and smaller optics, distortion varies with the position of the beam, but it can be dynamically corrected as the beam is scanned across the mask because the distortion is essentially constant across the beam's relatively small diameter. Thus the Japanese group was able to build a unit with a column diameter of only 250 mm and the reasonable height of 2.1 m.

Only one major problem remains Closed-loop patterns are not possible, because the center falls out of the mask.

Lenses. The system uses a threestage magnetic lens for illumination of the metal mask and a two-stage magnetic lens for projection of the pattern onto the mask. The illumination-lens system operates in different modes during alignment and exposure; the projection lens system works in the same mode for both operations. During exposure, dynamic correction of the angle at which the beam illuminates the mask preserves alignment across the mask's area, and dynamic correction of the projection lens preserves image sharpness. -Charles Cohen

a library of ready-made business software.

Also, customers who develop their own Microcobol programs know their software investment will not be made obsolete by changes in hardware. Says Jacks, "This is particularly significant for large companies that wish to develop programs for operation on different hardware at several different sites."

CAP-CPP has already written enough software to put a first-time user into business. It has a multiuser transaction-oriented business operating system called BOS and a number of standard business-application packages. Recently, it launched two packages—Autoindex and Autoclerk—that allow a user to prepare his own business programs. The first is a data-base enquiry and retrieval package; the other is a file-management package that is also capable of generating reports.

Interpretation. The interpreter, resident in main memory, recomposes compiled Microcobol statements into the microprocessor's machine code, executing each statement line by line. So far, CAP-CPP has written interpreters for six different machine architectures: the Intel

### **Great Britain**

# CAP-CPP writes Microcobol software for small-business applications

Microprocessor-based business systems have brought cheap computing power within reach of the smallest businesses, but the development of this new and potentially enormous market has been slowed by the lack of professional business software, according to the British software company Computer Analysts and Programmers (UK) Ltd.

To fill this need, it formed a new subsidiary, CAP-CPP Microproducts Ltd., in 1975 and has invested considerable programming resources over the past four years in the development of a high-level portable business language, called Microcobol.

The London firm seems to be on the right track. It is signing up vendors of small-business systems at the rate of one a week. Twenty are already on board, including two in the United States and one in the Netherlands.

Advantages. Portability means that a language can run on any microcomputer system for which a small interpreter program has been written. "You can take a diskette holding a compiled Microcobol program from an IBM Series/1 and run

it on a Mostek AID-80F immediately," emphasizes Ian Jacks, marketing manager at CAP-CCP Microproducts. Manufacturers of small-business systems can therefore cash in on

**They mean business.** At its development center in London, CAP-CPP Microproducts writes all of its Microcobol software, which is portable and designed for small businesses.



### **Electronics international**

8080, Motorola 6800, Zilog Z80, Digital Equipment Corp. PDP-11, IBM Series/1, and Texas Instruments 9900.

Says Jacks, "We completed an interpreter for Digital Micro Systems Inc.'s Z80-based DSC/2 in just two weeks," though one to two months is more usual. The company has now written interpreters for 13 different small-business computers, including Applied Digital Data Systems' System 70 and Siemens' 6.610.

CAP-CPP bypasses the need for a compiler for each different micro-processor by writing a compiler, an operating system, and applications software for a virtual machine. High-level Microcobol statements are then compiled to produce intermediate-machine code, each statement of which corresponds to one

instruction for the virtual machine. The interpreter operates on this intermediate-machine code.

Machine-code instructions for real and virtual machines are at a similar level of complexity. Therefore the Microcobol interpreter needs only 4 kilobytes of code. "The only penalty," says Blandford, "is a slower operating time, which scarcely matters in interactive computing."

In addition to the resident interpreter, CAP-CPP also prepares a compiler so that user-developed programs can be both compiled and run on the same machine.

Making software portable is the only way that high-quality software can be produced at the prices needed to match low hardware costs, the firms says. Autoclerk costs \$2,000, and Autoindex \$1,000.

-Kevin Smith

Quite the contrary, in fact: a new generation of telecines with solidstate image pickups and digital field stores is in the offing.

The first such unit to make it into the marketplace most likely will be from Robert Bosch GmbH. The West German company's Television Systems division showed the prototype of its FDL 60, using charge-coupled devices (CCDs) as image sensors, at the 11th Biennial International Television Symposium held from May 27 to June 1 at Montreux, Switzerland. Deliveries will start early next year, reports Dieter Poetsch, telecine products research manager for the Darmstadt-based division.


Bosch has priced the basic machine at some \$165,000. That puts it roughly in the same bracket as the widely used Mark III flying-spot telecine (when fitted with a digital store) from the UK's Rank Cintel, part of the Rank Organization.

Gains. Several advantages accrue from scanning a film image line by line with CCDs and then storing it in a digital memory before processing it into composite color video signals for two interlaced television fields. A major one is that the technique eliminates the painstaking precision adjustments required for conventional

### **West Germany**

# Telecine gains from the use of CCD sensors and digital storage

Broadcasters nowadays work whenever they can with television cameras and video tape recorders, but there is plenty of programming still based on motion-picture film. Thus no one yet foresees the demise of the telecine, the equipment that generates video signals as film is run through it.

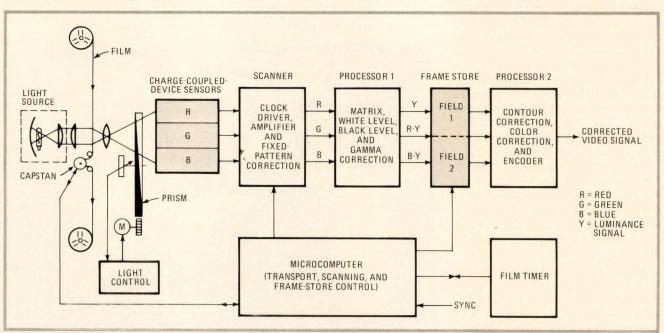

**Film to video.** Bosch telecine uses CCD sensors to effect line-by-line scanning of a film image. After processing, the signals are digitized and placed in a RAM field store. Odd lines are read out for the first interlaced field, even lines are read out for the second.



Company after company is becoming convinced that it can significantly reduce the huge costs involved in microprocessor troubleshooting by using HP's signature analysis technique. The savings on board inventories alone can run into hundreds of thousands of dollars. In brief, it is now possible for a modestly trained technician to accurately troubleshoot microprocessor boards right down to the component level in the field or on the production line.

A simple concept.

Subtle errors in the lengthy bit streams of microprocessor-based products are definitive clues to component failures which cause them. But lengthy bit streams are very tedious and costly to examine by traditional means.

HP's 5004A Signature Analyzer solves this problem by compressing lengthy bit streams into short, four-digit, hexa-decimal signatures that quickly and accurately lead right to the failed component.

Just activate a digital exercise routine in the circuit under test and compare the bit stream signature at each data node with the known good signatures previously written into your service manual. Digital signal tracing now becomes as simple as analog tracing used to be. But more accurate. So accurate that it catches almost every possible fault, including many that can be detected in no other way. It once again becomes realistic to think of field or production troubleshooting to the component level by technicians.

Design it in or retrofit.

The savings in service costs and spare circuit board inventory are well worth the effort of designing with signature analysis in mind. It could possibly eliminate the need to partition your product for modular service. In some cases, it could even pay you to "retrofit" by developing exercise circuitry and a signature manual for your existing equipment. It's a fascinating—and very workable—concept. Amazingly the price of the HP 5004A Signature Analyzer that makes all this possible is a low \$990.\*

To help you make the most of this breakthrough we've prepared Application Note 222—"A Designer's Guide to Signature Analysis." Contact your nearest HP field sales office or write for your copy today. \*price, domestic U.S.A. only



1507 Page Mill Road, Palo Alto, California 94304

02823

For assistance call: Washington (301) 258-2000, Chicago (312) 255-9800, Atlanta (404) 955-1500, Los Angeles (213) 877-1282

### **Electronics international**

flying-spot scanners: to save bandwidth they scan each frame twice and thus need near-perfect registration to interlace the two fields (Rank Cintel's Digiscan storage option also does away with double scanning). The CCDs also eliminate some drawbacks inherent in image-pickup tubes—the need for high-voltage power supplies, distortions caused by beam deflection, and comparatively short life, for example.

In the FDL 60, the film runs continuously, its capstan-driven transport controlled by an 8080-based microcomputer that also has charge of the scanner electronics and the frame-store circuitry. Light passes through the film and is split by a prism into red, green, and blue components. Each component is imaged on its own 1,024-element sensor, a buried-channel CCD array, type FCD 131, from Fairchild Camera and Instrument.

The three imaged signals are then amplified and corrected in the scanner before undergoing conventional processing—matrixing, gamma correction, and setting of white and black levels—to obtain the luminance signal and two color-difference signals.

After the processing, the luminance and color-difference signals are converted into 8-bit digital signals having a signal-to-noise ratio of 50 decibels. The luminance signal is stored line by line and the two color-difference signals multiplexed and stored separately line by line in the memory, which is built of 16-K dynamic random-access memories, some 290 of them.

Odd and even. When the full frame has been stored, the odd lines are read out to get the first field and then the even lines to get the second interlaced field. After read-out the three signals are converted back into analog form and then encoded to get a standard composite color video signal—PAL, Secam, or NTSC.

All the read-in and read-out operations are controlled by the micro-computer. At read-in, each line gets a specific address so that the computer can be programmed to read out lines to obtain effects like

stop action, reverse action, and slow motion. Of course, the new telecine offers the conventional features of its flying-spot predecessors—like 16-and 35-millimeter film formats and magnetic and optical sound playback.

-Arthur Erikson

### **France**

# 4-km optic TV cable links camera to van

Field-production equipment for color television is part of the fast-growing list of hardware being bettered by fiber optics, and it has a new addition from Thomson-CSF, a major European producer of broadcast and studio equipment. At the May 27-June 1 International Television Symposium at Montreux, Switzerland, the Paris-based firm demonstrated the prototype of a two-way optical link that lets a camera operate as far as 4 kilometers from a van handling on-location production of a TV broadcast.

Longer. In contrast, when the link from camera to van is a multiconductor cable, the limit is just 250 meters. For triaxial cable—a coaxial cable for the video with added conductors for power—the limit goes up to 1.5 km; but the cable is some  $2\frac{1}{2}$  times heavier than the new fiber-optic link.

Thomson-CSF still has not set a price for its hardware but insists it will be competitive for links over 3 km long and will get cheaper if demand is strong.

Although there are many barebones optical links on the market that can handle a single video channel, none had the transmission characteristics that Thomson-CSF's Radiodiffusion-Télévision division wanted. So it turned to the company's electronic laboratories at Rennes. "We had to maintain broadcast quality," says the labs' assistant director, Jean-Claude Bellamy. "The weighted signal-to-noise ratio is 65 decibels, the phase differential less than 1°, and the gain differential less than 1%," he explains.

"From what some competitors and potential customers have told us, we are ahead with this link," Bellamy maintains. Instead of the usual oneway video cable, Thomson-CSF's has two. One fiber carries an encoded color video signal (PAL, Secam, or NTSC) and two audio channels from the camera to the control unit in the van. The other carries a black-andwhite video signal for the camera's viewfinder, two audio channels, as well as up to 15 analog control signals and 12 logic signals, from the van to the camera. In addition, eight copper wires carry power for the camera.

The watertight, dustproof cable connector snaps shut automatically when disconnected. The optical attenuation is less than 1.5 dB.

In the transmitting head for each channel is a gallium-arsenide laser diode operating at a wavelength of 830 nanometers. The diode's output is pulse-frequency-modulated and couples between 2 and 2.5 milliwatts of useful light power into the associated step-index fiber. Each has a 65-micrometer core and an outside diameter of 125  $\mu$ m, with attenuation less than 5 dB/km.

The audio and control signals are encoded into 12-bit digital format and multiplexed into a pulse-code-modulated signal at a rate of 512 megabits per second. This signal modulates a 7-megahertz subcarrier that is combined with the video signal, which has a bandwidth of 6.5 MHz, and fed to the pulse-frequency modulator. It operates at a 15-MHz carrier frequency with a swing of 3 MHz for a 1-volt change in the video signal.

At the receiver, the optical signal is picked up by a GaAs avalanche photodiode. The photodiode's output is amplified and then processed to extract the video and PCM signals for the multiplexed audio and control signals. The bias of the photodiode comes from a dc-dc converter controlled by a comparator's error signal that is the difference between the diode's output and a reference current. Thus no system adjustment is needed if the cable length is less than 4 km.

-A. E.

# The hot little idea that's spreading like wildfire.

Last year, Fairchild silently slipped over the silicon border into the 16-bit microcomputer systems business.

Our first product was the 9440
MICROFLAME™ microprocessor.
We introduced it as "the microprocessor that thinks it's a minicomputer."
But it looked like a component. So most people assumed it was just a component. It wasn't.

MICROCOMPUTER

GROUP

It was the heart of a microcomputer system.
The 9440 was the beginning of a systems family. Designed to let you buy a microcomputer one function at a time.
The idea caught on. Like wildfire.
Fairchild now has a separate organization totally dedicated to high-performance microcomputer technology.

The FIRE Microcomputer Group.
In the past few months they've built a healthy little 16-bit microcomputer systems business without much fanfare.

The time has come for fanfare.

Please turn the page.

FAIRCHILD

## The microprocessor that thinks it's a minicomputer.

The 9440 MICROFLAME is the world's first 16-bit bipolar microprocessor that performs like a minicomputer. In fact, it executes the NOVA\* instruction set. It's a complete

And the 9442 I/O bus controller. These three LSI chips, plus our performance-matched dynamic

bipolar RAM, are all that is needed to build a full microcomputer.

Major applications for the 9440 MICROFLAME include

intelligence, distributed multiprocessing and frontend (terminal) processing.

The MICROFLAME family is designed to let you design at your own speed, adding

functions

as you need them, until you have just the microprocessor system you need.

For more information on our hot little family, please write the FIRE Microcomputer Group, Fairchild Camera and Instrument Corporation, P.O. Box 880A, Mountain View, California

FIRE 94042.
MICROCOMPUTER

FAIRCHILE

MICROFLALME

minicomputer

CPU on one chip, packaged in a 40-pin DIP. It is supported by other family members:

The 9441 memory and DMA controller.

systems used in a variety of computing control and instrumentation environments. Telecommunications PBX and PABX switching installations. And distributed

OEM data processing

\*NOVA is a trademark of Data General Corporation.

Circle 236 on reader service card

## The OEM minicomputer with definite ideas.

FOCVS XVI is a minicomputer designed to use the NOVA instruction set and compatible I/O peripheral interface boards.

It offers either 32KB or 64KB of dynamic RAM operating at minicomputer execution

FOCUS XVI

times. It's I/O buscompatible to accommodate a wide range of peripherals. And it's supported by FIRE System software, allowing it to run millions of lines of applications software you've already developed.

The FOCVS XVI 9-slot chassis gives you up to eight extra slots so you can plug in other 15" x 15" boards. And it has front-panel controls for latch and

display of data addresses, and examining memory or

register contents.

Depending upon the minicomputer performance required, the FOCVS XVI may be equipped with either the GLOW-16 or BLAZE-16 15" x 15" boards. The

boards may also be purchased for use

without the FOCVS XVI enclosure for integration into your chassis.

For more information on the FOCVS XVI minicomputer, write the FIRE Microcomputer Group, Fairchild Camera and Instrument Corporation, P.O. Box 880A, Mountain View, California

94042.

FIRE MICROCOMPUTER GROUP

### **OEM** microcomputer with growth in mind.

SPARK-16 is a singleboard microcomputer supported by our FIRE software. It uses the 9440 MICROFLAME to give it minicomputer performance and is supported by companion boards to enhance its memory and input/output capabilities. memory, just add our

What you do

with it depends on

what you want it to do.

It comes with 4KB of

FIREBUG, Interface Logic

autoload PROM with

for current loop or

RS 232C, a 100-pin connector, control switches and display. Plus 8KB of static or dynamic RAM. Or 16KB of dynamic RAM. All this on

a single 8" x 10" board. If you need even more

> SPARK-MEM board for up to 64KB of dynamic RAM, with parity.

For I/O intensive applications, you can add the SPARK I/O board a general-purpose input/ output control that helps make SPARK-16 do what you want it to do.

The THERMOSTAT, a handheld console, is also

available to make your job easier. SPARK-16 is easy to work with and easy to find. It is already available from over 60 distributor locations.

For more information on our little spark of genius, please write the FIRE Microcomputer Group, Fairchild Camera and Instrument Corporation, P.O. Box 880A, Mountain View, California

94042. ICROCOMPUTER AIRCHILD

Circle 76 on reader service card

### The software you've already paid for.

If you've spent time and money developing your own applications software that uses the NOVA instruction set, we have a pleasant surprise for you. Using our Fairchild Integrated Realtime

Or our FOCVS XVI Minicomputer; our BLAZE-16; our GLOW-16 or our MICROFLAME Development

If you're about to write new applithis: the FIRE family of

System. cations software, consider

Executive (FIRE) System software, you can run those expensive lines of applications programs on our computers. Our SPARK-16 Microcomputer.

microcomputers is offered with extensive software support. It uses software familiar to most minicomputer programmers. And the NOVA instruction set has been

proven for years. Operating systems, powerful text editors, diagnostics, assemblers and high-level languages are all at your

disposal from Fairchild.

For more information on our growing list of FIRE software products, write the FIRE Microcomputer Group, Fairchild Camera and Instrument Corporation, P.O. Box 880A, Mountain View, California

94042. AICROCOMPUTER AIRCHIL

# The development system that speaks a familar language.

From the beginning, our entire MICRO-FLAME™ microcomputer family has been designed to be compatible with hardware and software you already have.

Our new development system is no exception.

It lets you develop applications software for our 16-bit microprocessors using the familiar NOVA\* instruction set. You'll also be able to employ "off-the-shelf," industrystandard peripherals. Including high-speed

# MCROFLAME DEVELOPMENT

readers, printers, PROM/ FPLA programmers, modems, magnetic tape (800/1600 BPI, 9-track), cartridge disks (10MB) and

storage modules (80 or 300MB).

You can save considerable time and money because you won't have to rewrite all of your programs or learn a new language. Which translates into shorter lead time to get your product on the market.

### The benefits grow on you.

Fairchild's MICROFLAME Development System is an enhanceable system designed to develop prototype hardware and software for a broad range of microprocessor applications. From PROM resident code for MICROFLAME-based controllers to realtime multitasking software for distributed processing or control applications using the FOCVS XVI computer.

For the record, our development system combines the FOCVS XVI, a powerful computer offering 64KB of RAM, with a dualdouble-density IBM-compatible floppy-disk subsystem (1 megabyte capacity expandable to 4 megabytes). A free-standing video display terminal and a 150-CPS bidirectional dot matrix printer complete the basic system.

A powerful link.

An important feature of our development system is the FIRELINK™ It links the targetprototyping microcomputer hardware to the MICRO-

FLAME Development System via an RS232C port. FIRELINK is used to upload or download assembled programs into the target system

and to debug and monitor, remotely, the execution of object code in the target hardware.

HARD DISK

Supports industry

standard mass

storage devices

Multi-Job

(swapping)

FIRELINK has the additional capability of communicating with remote target systems or other MICROFLAME Development Systems via a modem/acoustic coupler over telephone lines if necessary.

### Software with FIRE power.

The integrated hardware is fully supported by the Fairchild Integrated Realtime Executive (FIRE) System software.

The Interactive Multitasking Disk Operating System (FIRE-IMDOS) supports extended file management, timesharing and deviceindependent I/O on the development system.

With user-supplied high-performance peripherals, FIRE-IMDOS supports timesharing for a number of users, limited only by performance of the swapping device. Additional features include password protection and version number contro

for automatic tracking and backup during the debug phase of development. Spooling capabilities allow printing to proceed concurrently with other interactive activity, thereby increasing the throughput of the system.

The system includes, as standard, system processors such as FIRE-EDIT (text editor), FIRE-MACRO (macroassembler), FIRE-SYMBUG (symbolic debugger),

CPU/MEMORY 64KB High-Speed Dynamic RAM.4KB Autoload PROM.

Line Printer/Reader-Punch Interfoce.

24-line

display

80-character

Programmer's Console

60 Hz Real-Time Clock · Current Loop/R232C Serial Interface.

PRINTERS

Bidirectional dot

Supports High

Speed Line|Printer

Matrix Printer

150 CPS

(standard).

Spooling

capability.

COMMUNICATIONS

Communications

Upload/Download

to Target System.

interfaces.

· FIRELINK

(standard) for

FIRE-LIBE (relocatable utility

library), FIRE-LIBEDIT (relocatable library editor), FIRE-OEDIT (octal editor) and FIRE-TYPESET (typesetting program).

The software for PROM formatting and burning is standard on our system using either an attached usersupplied PROM


VIDEO DISPLAY TERMINALS DISKETTES MAGNETIC TAPE IBM-compatible, 800/1600 BPI, Dual-Double-9-track magnetic **Density Diskette** tape drives allow interaction with Drives (standard) ASCII keyboard large systems. Software Numeric key pad selectable programmer or a detached paper tape.

Optional high-level languages under the development system software include BASIC, FORTRAN and PASCAL.

The system is delivered complete with documentation and an automatic installation and system-test diskette to assist user setup and checkout of the system. For more information, write the FIRE Microcomputer Group, Fairchild Camera and Instrument Corporation, P.O. Box 880A, Mountain View, California 94042.

\*NOVA is a trademark of Data General Corporation



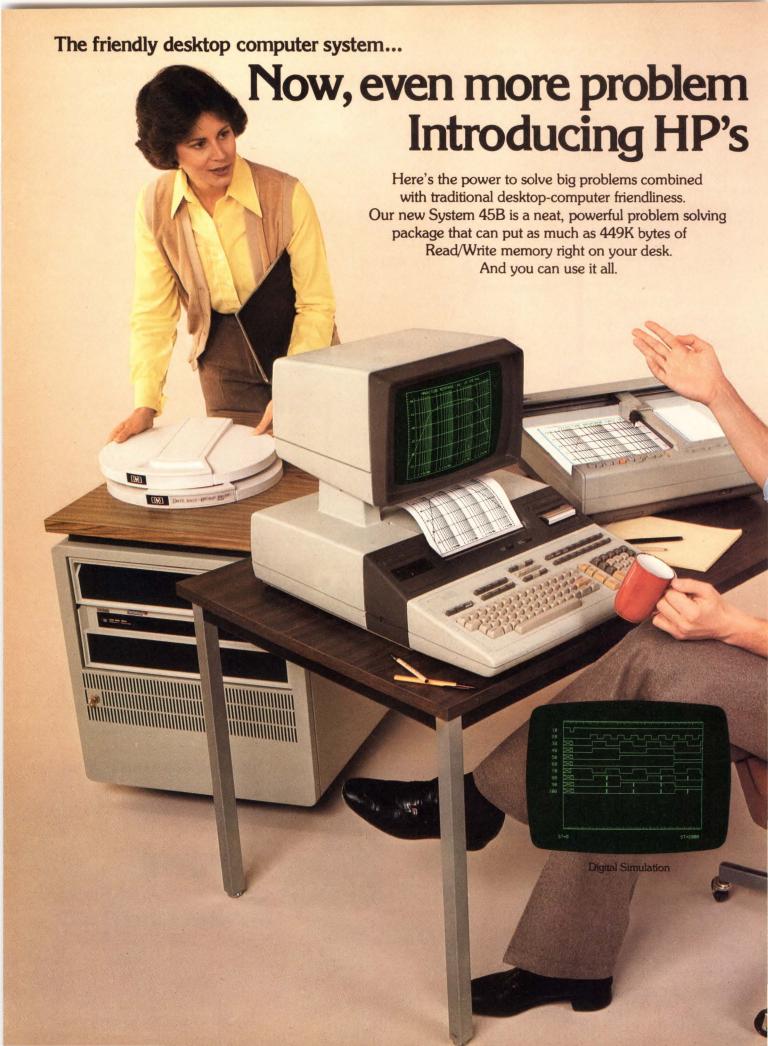

# solving power at your fingertips. new System 45B.

The operating system (120K bytes) resides in its own ROM, which means the entire Read/Write memory (56K to 449K bytes, depending on the option you choose) is available for your programs and data. And since System 45B is friendly and easy to use, it puts you in charge of solving your problems. It has no complicated start-up procedure, no operating system to load and no compiling to do. System 45B gives you powerful graphics capabilities: plotting, digitizing, charts,

graphs, histograms, window plotting and more. It lets you add a wide range of plug-


compatible HP peripherals such as the HP cartridge disc drive (7906M/S) and the 4-color HP plotter (9872A) shown. With the System 45B and its full line of input, storage and output peripherals,

you can configure a system that will solve today's big problems and adapt to your needs in the future.

To help you fully utilize the power and versatility of the System 45B, an extensive array of software is available, including new programs in the areas of statistical and numerical analysis, engineering design, structural engineering and business management.


Because it uses HP Enhanced BASIC language, System 45B provides a conversational style of problem solving that lets you interact with the system in a way that parallels human communication. Beginner or experienced programmer, you'll find HP Enhanced BASIC as friendly as it is powerful.

For more information on how the new System 45B can put problem-solving power and flexibility at your fingertips, call the HP Literature Center toll-free day or night. The number is 1-800-821-3777. Extension 131 (Alaska and Hawaii included). (In Missouri, call 1-800-892-7655, Extension 131.) Or, call your nearest HP office for a demonstration. OEM discounts available.



Structural Analysis

Probability




**GANTT Chart** 



3404 E. Harmony Road, Fort Collins, Colorado 80525

For assistance in U.S. call: Washington (301) 948-6370, Chicago (312) 255-9800, Atlanta (404) 955-1500, Los Angeles (213) 877-1282. In Canada call: Mississauga, Ontario (416) 678-9430. Ask for an HP Desktop Computer representative

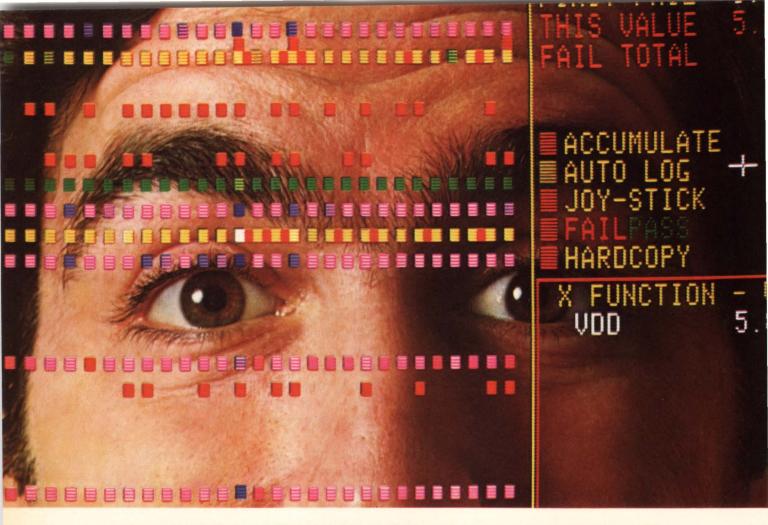

### SEE WHAT MEMORIES ARE MADE OF.

There's a whole new crop of semiconductor memories coming to market this year.

Better 4k statics. New 16k and 64k dynamics.

Now it's just a matter of who learns to make and use them first. Because whoever does is going to have one memorable year.

Today, more and more memory users are learning their way around the new devices with the help of the Teradyne J387, equipped with Real-Time Bit Mapping.

With RTBM you get all the way inside a memory, watching bits fail under changing test conditions on RTBM's 19-inch full-color display. It's a view of device behavior you just can't get anywhere else.

### Shorter device design times.

With the J387's interactive programming, characterizing new devices is a breeze. The system asks questions and the design engineer answers them in the appropriate device language.

Using either software programming or a joy stick, the engineer can control timing edges, voltage levels, and test patterns. He can then see, bit by bit, how the memory is affected, with different colors clearly indicating different bit fail conditions.

Characterization time for new devices is dramatically shortened. So you can introduce new designs faster and with greater confidence.

Moreover, RTBM gets the right individual—the design engineer—completely into the characterization process.

### **Duplicate actual operating conditions.**

The best way to see if a device checks out is to check it out under the specific operating conditions for each application. RTBM has the speed and the capacity to do just that.

Memory users can totally qualify incoming devices, as well as the vendors who supply them.

Further down the line, this means a substantial savings. Because end-product reliability goes up while rework time to correct faults goes down.

### The total system.

Teradyne's J387 has a lot going for it besides RTBM. There's a Test System Administrator that integrates information from multiple systems. And a Data RAM that permits testing of RAMs, ROMs or PROMs in any mix you wish. And Automatic Edge Control that saves hours of calibration time and countless human mistakes.

It's all part of the definite edge Teradyne's J387 can give you. Send for our free brochure. Write: Memory Product Group, Teradyne, 21255 Califa Street, Woodland Hills, CA 91367.



### 8-inch hard disks set to go

Despite lack of a standard medium, Winchester drives could be hottest peripheral since floppies arrived

by Anthony Durniak, Computers Editor

The makers of 8-inch Winchester disk drives left the starting gate as scheduled at the National Computer Conference and are racing after what may be the hottest peripheral technology since the floppy disk was introduced some six years ago. More than a half-dozen manufacturers introduced 8-in. drives the first week of June [Electronics, May 10, 1979, p. 40], making them the talk of the NCC in New York. But the lack of a standard medium and some vague packaging and interfacing details will probably slow the contenders'

progress for at least a year.

The new drives are all based on the so-called Winchester sealed-medium technology that was originally designed for mainframe computers and has become popular over the past 18 months in drives aimed at the small computer systems market [Electronics, July 6, 1978, p. 90]. Instead of the standard 14-in.-diameter disks, however, the new units use media measuring roughly 8 in across and thus fit the same cabinet opening as a standard floppy-disk drive. But where a floppy can store a

maximum of 1.6 megabytes, the new drives hold as much as 60 megabytes.

With access times four times faster than those of floppy disk drives and price tags ranging from \$1,300 to \$2,100 each in large quantities, the drives appear perfect for small computer-system builders who want additional capacity and performance but not the traditional 14-in, disk's size or price.

"There are compelling reasons to look at 8-in. drives," explains one potential user, David Seigle, vice

				THE 8-INCH	DISK LINEUP				
Company and model number	Capacity (megabytes)	Number of platters	Outside diameter of media (mm)	Recording densities	Positioning mechanism	Average - access time (ms)	Motor type	Electronics included	OEM price
BASF 6170 series	8 24	1 2	210	6,542 b/in. 500 t/in.*	servo-controlled linear motor	50	direct drive brushless dc	drive and controller	\$2,100† \$3,100†
IBM model 62 PC	29 64.5	3 6	210	8,530 b/in. 450 t/in.	servo-controlled rotary actuator	27		-	-
International Memories Inc. model 7710	11	2	220	5,868 b/in. 300 t/in.	servo-controlled linear actuator	50	direct drive brushless dc	drive plus controller	\$1,500+
Kennedy series 7000	4 12	1 2	210		-	50	ac belt drive	drive	about \$2,000 _
Memorex model 101	11.7	2	200	6,100 b/in. 195 t/in.	open-loop stepper-motor band-actuator	70	direct drive brushless dc	drive	\$1,400 - 1,500
Micropolis Micro Disk 1200	9 27 45	1 2 3	200	6,640 b/in. 478 t/in.	servo-controlled rotary actuator	34	direct drive brushless dc	drive and controller	\$1,350† -
Microcomputer Systems Corp. 8000 series	50 110	3 6		8,500 b/in. 510 t/in.	servo-controlled rotary actuator	25	direct drive brushless dc	amplifies only	-
New World Computer Mikro-Disc 211	2.1	1	200	8,000 b/in. 100 t/in.	stepper motor, open-loop	18.8	ac direct drive	drive plus interface	\$900
Pertec D8000	20	2	210	6,000 b/in. 476 t/in.	servo-controlled rotary actuator	50	direct drive brushless dc	drive plus interface	\$1,800+

### **Probing the news**

president of Basic Four Corp.'s Distributed Data Processing division, Tustin, Calif. "The smaller size of the drive gives you less skin and framing to worry about, and the drives use less power. This results in a lower overall cost and a more compact system."

And there were many drives to be seen at the computer show. Of recently announced units, there was the D5000 from the Peripherals division of Pertec Computer Corp., Chatsworth, Calif., while Micropolis Corp. of Canoga Park, Calif., gave private showings of its MicroDisk 1200 in a nearby hotel [Electronics, May 24, 1979, pp. 194, 264], Microcomputer Systems Corp. of Sunnyvale, Calif. brought a virtual parade of original equipment manufacturers, potential customers all, to its suite in the Hilton to see its unique entry (p. 39), while BASF Systems of Bedford, Mass., Memorex Corp. of Santa Clara, Calif., Kennedy Co. of Altadena, Calif., and New World Computer Company Inc. of Costa Mesa, Calif., unveiled entries at their booths.

Shipping. International Memories Inc., the Sunnyvale, Calif., company that pioneered in this area last year [Electronics, April 27, 1978, p. 40] and did not exhibit at the NCC, is the only independent maker to say it is now shipping 8-in. drives. IBM, credited with encouraging the current activity with its own model 62 PC drive (known in industry circles as "piccolo"), is delivering it to customers for its System/34 small business system.

But others wanting to buy the drives will find them mostly unavailable until the end of the year at the earliest, and will have to choose among a wide range of performance specifications (see chart). Even pricing is not yet firm.

According to James S. Toreson, president of Microcomputer Systems Corp., the lack of a standard medium "is a serious problem. Until media is standardized there will be no market." As the chart shows, the makers are almost evenly divided between use of the 200- and 210-millimeter outside diameters. And

unless a single size is used, the volumes may not be high enough for the drives to be economical.

Those companies that make both media and drives, such as BASF and Memorex, are likely to supply their own needs before they ship to competitors—which could leave independents out in the cold.

Differences. Users will also find that, though all the makers advertise their drives as fitting the same 4.6-by-8.5-in. opening as the standard floppy-disk drive, a floppy cannot literally be pulled out and replaced by an 8-in. drive. To begin with, the packages contain different electronics. Most, though, have the basic drive electronics, including the signal amplifiers, read/write electronics, and motor and servo control circuitry, configured into the basic drive package.

But International Memories, BASF, and Micropolis also have room to add a separately priced controller to handle the error checking and correction, data formatting, and interfacing to the computer. Memorex says the design of a controller is under way, but because it uses more platters than the others, Microcomputer Systems' drive has room only for the signal amplifiers.

Although Control Data Corp. of Minneapolis has not yet announced an 8-in. drive, Gordon Brown, senior vice president for planning and marketing of peripheral products, says that the one under development uses custom circuitry to pack more electronics into the drive. "We think that the use of custom LSI is critical to maintaining the small physical dimensions."

In addition, though most floppy disks currently use ac motors to rotate the media, many of the new 8-in. drives are using brushless dc motors. Designed as part of the spindle, these motors are compact, measuring no higher than 1 in., and are said to maintain a more accurate speed—importance for a consistent data-transfer rate. But a new power supply will be needed.

Finally, as Basic Four's Seigle says, "The real question is backup." With removable disks such as traditional cartridge disks or even floppy disks, a systems user with two drives can make a copy of important

programs or data and remove it for safe keeping. Fixed disk drives therefore require a second device with a removable medium for backup purposes.

Streaming tape. IBM's answer to the problem has been its 8809 tape drive. Dubbed a streaming tape drive, the unit operates at a high data-transfer rate to accept data being copied, or dumped, from the fixed 62PC disk drive. Cipher Data Products Inc. of San Diego, Calif., attracted lots of NCC attention with its streaming drive [Electronics, May 24, p. 208] and Data Electronics Inc. of Pasadena, Calif., promoted its high-capacity tape cartridge system at the show (p. 204).

But Ralph Gabai, general manager of Pertec's Peripherals division, says the streaming tape drive is not the perfect solution. "For small systems, such drives are still far too expensive, especially when you realize that two different controllers are required." So another backup device is needed, but Gabai will not say what Pertec is working on.

Although CDC's Brown says the company "is actively developing a streaming tape drive," its yet-to-come offering will include "a family of products with a combination of fixed and removable media including a small disk pack."

Still, even with all the details to be worked out, most industry observers see the drives as the most promising future peripheral product. Microcomputer Systems Corp.'s Toreson points out that the more sophisticated multiprogramming and file management software currently being added to small computer systems requires so much use of disks that the higher performance and durability of the hard disks is essential. "They wear out floppy media too fast," he says.

And the new 8-in. hard disks will lengthen the life of disk-drive technology in the face of predicted encroachments by semiconductor devices such as bubble memories. Micropolis president Stuart Mabon estimates that bubble chips would have to achieve densities of 16 million bits per chip and a price of \$25 per chip in order to match the 8-in. disks' price and storage capacity per volume.

# ONE GIGAHERTZ REAL-TIME BANDWIDTH



### See what you've never seen before.

Now Tektronix proudly announces its new 1 GHz real-time scope, the 7104. Rise time: 350 ps. Plus a 10mV/div - 1V/div vertical sensitivity, and a 20 cm/ns writing rate so any signal, single-shot or repetitive, can be seen and photographed. A window into a world previously invisible.

As part of the Tektronix Plug-In family, the 7104 is compatible with 7000-Series plug-in units. Including several new ones that take the 7104 to the limits of its specifications. In addition, the 7104 opens a whole new world of technology,

both in circuit design and crt operation.

Throughout the history of science, important discoveries have been made possible by similar advances in instrumentation. We believe the 7104 represents such an advance.

The Tektronix 7104 Plug-In Oscilloscope. See what you've never seen before.

See the 7104 at Electro-New York



For literature, call (800) 547-1512 toll free.

### Peripherals

### Denser disk drives poised for surge

Thin-film production technology permits smaller recording heads, meaning narrower track gaps and more density, capacity, and speed

by William F. Arnold, San Francisco regional bureau manager, and Anthony Durniak, Computers Editor

Disk drives, which have been vital computer peripherals for more than 20 years, are about to take another leap forward in memory density, storage capacity, and data-transfer rates. Manufacturers are bringing out of development into commercial production a much smaller type of recording head made with a semi-conductorlike thin-film technology.

One of the advantages of a smaller head is simply that the spacing between the tracks on which digital data is recorded can be narrowed and, consequently, the number of tracks on each side of the disk increased. Further, because the size of the head's recording gap can be more precisely controlled during the semiconductor manufacturing pro-

cess than in the currently used handmade ferrite heads, thin-film head technology paves the way for great increases in memory density.

In hard numbers, IBM's recently announced 3370 disk drive, which apparently incorporates thin-film head technology [Electronics, Feb. 15, 1979, p. 85], has 571 megabytes of memory, compared with 317.5 megabytes for the previous top-ofthe-line 3350 model that employs conventional ferrite heads. The 3350 has 478 tracks per inch and a recording density of 6,425 bits per inch. Because IBM will take the wraps off the 3370 only after it has shipped its first product, expected to be as early as this October, industry experts can only estimate that its specifications are 600 to 700 tracks and around 12,000 bits per inch.


When new coating techniques are also applied to the manufacture of the recording medium on the surfaces of the disks, those specifications should soar to 2,000 tracks per inch and 25,000 bits per inch by 1985, or 16 times the present storage density, estimates Frank J. Sordello, manager of the Recording Technology Center that Memorex Corp., Santa Clara, Calif., set up to develop such advanced technologies.

Need details. Naturally, this bright promise stirs a lot of industry interest. But companies pursuing the IBM-plug-compatible market say thin-film heads will not really take off until they find out details of IBM's 3370. In addition to Memorex, IBM-compatible vendors Storage Technology Inc. of Louisville, Colo.; Sperry Univac's ISS division in Cupertino, Calif.; and Magnetic Peripherals Inc., the Minneapolis joint venture of Control Data Corp. and Honeywell Information Systems Inc., are all working on the new technology.

Others, though, are not waiting for IBM, believing that thin-film technology is one whose time has come, regardless. Independent disk maker Ampex Corp. of Redwood City, Calif., and CII-Honeywell Bull in France [Electronics, June 7, p. 76] are both working on thin-film heads.

Also preparing for what is expected to be a boom in new head technology are the independent head manufacturers who supply many of the disk makers as well as the smaller in-house disk-drive manufacturing efforts of minicomputer companies. These include established

**Magnetic coil.** This inductive thin-film head from Memorex resembles a ferrite head because of its coil winding. The other approach to thin-film technology is called magnetoresistive.

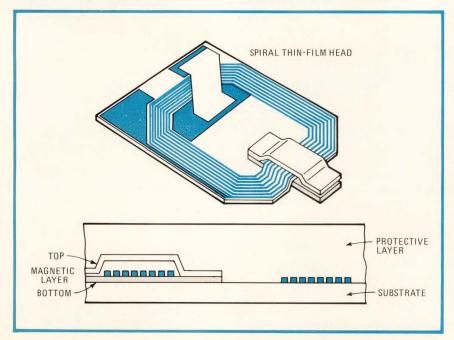

Ready to rent, lease or buy test instruments? Let 15 help.

When you need test equipment you usually need it fast. That means that you can't waste a lot of time looking for the right equipment or sending back equipment that doesn't work the first time. USIR can help.



way to acquire the instrument you need.

> Our exclusive Instrument Acquisition Analyzer pinpoints the relative costs of renting, leasing or buying an instrument.

We can tell you in sixty seconds what equipment is available and how soon you can have it.

Using IDIOM, our computer system, we can find the instrument you need in one minute at any of our locations



throughout the U.S. and Canada, tell you how much it costs and how soon you can have it on your bench. We can also suggest direct replacements if the instrument you need isn't immediately available.



USIR finds the fastest possible way to put the gear you want on your bench. And you can be sure that it will work when it arrivesbecause we check each piece of gear twice, once when it comes back from the field and then again just before we pack it for shipment to you.

Let US tell you more—Ask for this free Instrument Acquisition Analysis Kit.

USIR has prepared a kit that will help you find the fastest, most efficient, least expensive way to acquire the instruments you need. The kit includes our Instrument Acquisition

Analyzer, a current USIR catalog and our brochure, "Test Equipment-Think Of It As Money." This piece discusses the different ways of acquiring instruments from a manager's point of view considering all





Circle 87 on reader service card

A U.S. Leasing Company

2121 S. El Camino Real San Mateo, CA 94403 (415) 574-6006




# **Another new** Sigma relay

New Series 49 is a general purpose relay for both printed circuit and chassis mount applications. SPST or SPDT, it occupies just one cubic inch. Prices start at only \$1.86 in 100 quantity and delivery is from distributor stock.

This versatile relay, available in a variety of terminal arrangements, is especially suitable where space, low cost and long life

are important.

Send for new catalog describing the complete Sigma line of relays, opto-isolators and photo-electric controls. Sigma Instruments Inc., Braintree, Mass., 02184. (617) 843-5000.

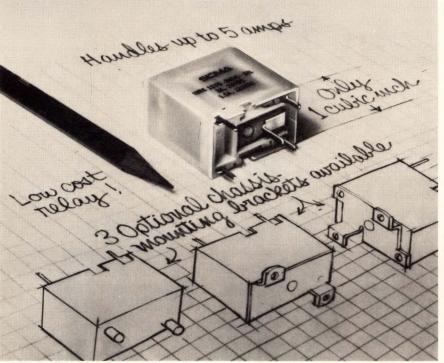

Circle 88 on reader service card

### 1979 Electronics **Buyers' Guid**

The only book of its kind in the field. If you haven't got it, you're not in the market.

To insure prompt delivery enclose your check with this coupon.

1979 edition available in June.



de	Elegis
	Betroics BUYERS
lectronic Buyers Guide 221 Ave. of the Americas	** A display # 100 A display #

New York, N.Y	. 10020	
Canada.	nd mecopy(ed \$30 per copy de	elivered in the USA o
Name		
Company		
Street		
City	State	Zip

### Probing the news

disk-head makers such as Applied Magnetics Corp. and Information Magnetics, both of Goleta, Calif., and National Micronetics Inc.'s Pacific division in San Diego, Calif., as well as newcomers IBM-spinoff Dastek Corp. of San Jose, Calif., which is working with Santa Clara, Calif., media-maker Dysan Corp.; Magnex Corp., an Oklahoma City subsidiary of Exxon Enterprises; and Nortronics Inc. of Minneapolis.

One fact prodding thin-film head development, of course, is that "we've pushed ferrite to its limits," states Joe Levine, Magnex Corp.'s director of marketing, who thinks thin film will result in lower cost in the long term. Thin-film production leads to large and highly controllable mass production, Memorex's Sordello states, adding that it is possible to make 2,500 heads per 3-inch wafer.

Fear of flying. The smaller size and lower mass of the thin-film heads are extremely important when improving the mechanisms of the flying heads used in current stateof-the-art disk drives. The heads used in drives such as IBM's 3350 fly about 20 microinches over the disk's surface, which Sordello compares to "flying a jumbo jet 500 miles an hour a quarter of an inch off the surface of a lake."

Ferrite heads must be manually ground down to a size of about 4 micrometers each side and about 25 µm high with a recording gap of 1 µm. Thin-film heads, on the other hand, measure only 38 µm on a side and are about 6 µm high, with a recording gap of only 0.3 to 1.5 μm. Moreover, because they are smaller and lighter, thin-film heads "fly" 0.2 µm from the surface, five times closer than ferrite heads.

Such scaling down brings problems, as the many years and millions of dollars spent by industry leaders testify [Electronics, March 3, 1977, p. 97]. Process control is critical at these close tolerances. Moreover, "as the tracks get narrower, the amount of signal goes down," explains Thomas A. Rescamp, vice president of Applied Magnetics' Research and Advanced Technology division. In addition, the head-positioning



We have the facts and figures needed to get you out of the cable assembly business.

We can supply any of our miniature Thorkom connectors complete with cable – fully assembled, with a topquality molded strain relief.

It's our Vikord custom cable assembly service.

The cable can be any length you need, pre-tested for IR and continuity.

Plugs and receptacles can be on one or both ends.

And the molded strain relief can be straight or right angle. Either way, it's flexible and sealed for protection from the environment.

**Good delivery.** With most standard 22 gauge cables, we can give you delivery on the complete Vikord assemblies in two-to-four weeks. Other sizes may take longer.

**Savings.** You get all kinds. First, your cost of the assembly should be less. Second, you get a higher quality, longer lasting, professional looking product. Third, you have the assemblies you need when you need them.

**The details.** They're in our latest Thorkom/Vikord catalog. Send the coupon to get your free copy.

Or, if you'd like specific facts, figures and a sample quicker than that, call us: (213) 341-4330.

### O.K. Send me

- ☐ details on your Vikord cable assemblies.
- details on your Thorkom connectors.
- ☐ the name of your nearest rep./distributor.

My potential application is:

NAME:

\_\_\_TITLE:\_

HONE:\_\_\_\_\_

\_\_\_\_ EXT:\_\_\_

COMPANY:
ADDRESS:

.....

STATE:

7IP



21001 Nordhoff Street, Chatsworth, CA 91311, U.S.A./(213) 341-4330/TWX 910-494-2094

The most comprehensive compilation of information on the physics of failure in electron devices is found in the published proceedings of the annual International Reliability Physics Symposium (IRPS). These proceedings now contain the papers presented at ten symposia held during the years 1968–1978 (there was no 1969 symposium) and thus have achieved a formidable bulk, which has made the problem of searching for, and retrieval of desired information, a time-consuming and costly affair.

Or at least it **WAS** costly and time-consuming until RAC hauled-off and issued its:

### SEARCH AND RETRIEVAL INDEX TO IRPS PROCEEDINGS— 1968 TO 1978



- Designed to make information retrieval as rapid and effortless as possible
- All information indexed by four separate indexing methods
- · Alphabetical index · Key-words-in-title-index
- Author index Corporate index
- Ordering No. TRS-2
   \$20 per copy (\$24 non-U.S.) prepaid
   380 pages




Circle 90 on reader service card

### **Reliability Analysis Center**

RADC/RBRAC • Griffiss AFB, NY 13441 • Tel. (315) 330-4151; Autovon: 587-4151

RAC is a DoD Information Analysis Center Operated by IIT Research Institute

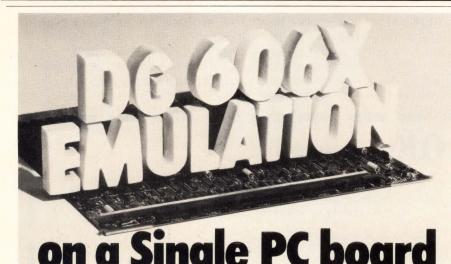

When you build the new Xylogics Model 850 Disk Controller into your Data General Nova® and Eclipse® or compatible CPU, you get more than just 606X emulation.

With the Model 850 Disk Controller, you can accommodate up to four storage module drives by CDC, Ampex, Memorex, CalComp and others providing storage capacity to 1.2 billion bytes of unformatted data. Media compatibility is obtained with the Memorex 677. The Model 850 is fully software compatible, too.

Best of all, you get all this on one 15" × 15" single printed circuit board which plugs into one CPU chassis slot.

For 606X emulation, go with Xylogics Model 850 Disk Controllers. And get *real* performance!

Xylogics

\*Trademark of Data General Corporation.

Xylogics, Inc., 42 Third Avenue, Burlington, Massachusetts 01803 (617) 272-8140 International Subsidiary: Xylogics International Ltd., Lynton House, Mill Lane, Gerrards Cross, SL9 8AY, United Kingdom Tel: (02813) -88287

We did it with . . . innovation/imagination/integrity

magnetoresistive, in which a current-driven resistive network is modulated when it is near a magnetic field. The other is inductive, sensing the rate of change of a magnetic field generated by a moving medium. The first approach has an advantage in that it can read independently of the speed of the medium and can yield a signal two to six times stronger than an inductive head of similar size, but it cannot write. Inductive approaches are dependent on a moving medium, but can both read and write.

Probing the news

mechanisms must be refined to oper-

Two routes. There are two ap-

proaches to thin-film heads. One is


ate to tighter tolerances.

First, thin-film disk drives are most likely to use inductive techniques because of the read-write feature, whereas magnetoresistive approaches are likely to show up on tape drives, industry executives surmise. Later on, however, some believe that both technologies will be combined in one head.

But Rescamp links magnetoresistive heads with noise, thermal, biasing, and other problems. Besides, they are nonlinear detectors, unlike linear inductive sensors, which "have none of these problems," he says. The magnetoresistive head "has more potential, in theory, but it's a question of when," he says. Also, sensitivity in inductive heads can be heightened by increasing the number of turns in the coils of conducting material, states Sordello.

The thin-film head technology also promises to spawn further advances in mass memory storage. Some developers talk of using many heads on each side of a disk (a maximum of two is now used) to reduce head-positioning movement and also increase data-transfer rates. Others see logic being integrated onto the same chip as the thin-film head to provide error checking and correction or content-addressable memories, freeing the central processing unit to perform other tasks. Because of these and other advanced peripheral research, Rescamp speculates that the industry could see disk drives out to the year 2000.

# "WHY DOESN'T SOMEONE BUILD A CMOS 555?"

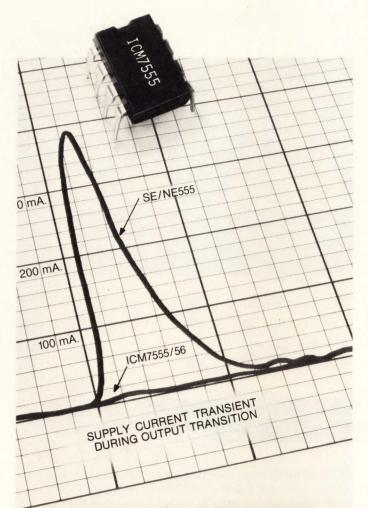

# SOMEONE DOES. US.

### 1/20TH THE POWER REQUIREMENT.

Make your own comparison between the ICM7555 timers and the Bipolar 555's you're designing in now:

	ICM7555IPA	Bipolar 555's	
Supply current	$80\mu A$ typ.	3000μA typ.	
Supply voltage range	2 to 18V	4.5 to 16V	
Guar. Max. Osc. Freq.	500KHz	150KHz	
Operating Temp Range	$-20^{\circ}$ to $+70^{\circ}$ C	0° to 70°C	
Output Risetime	40ns	100ns	

### PIN-FOR-PIN.

The ICM7555/56 single and dual precision timers are function-for-function, socket-for-socket replacements for the SE/NE 555/556 timers in 95% of all applications. And, they require no power supply decoupling or voltage decoupling capacitors.

### MAXCMOS.™

Intersil's precision timers in MAXCMOS™ are ideal in applications where low power, wide voltage range, low noise and higher frequencies are a requirement. Applications include: precision micropower timing; pulse generation; time delay generation; sequential timing; and micropower RC oscillators. Utilizing either TTL or CMOS logic. And at 75¢\* each, they're the only game in town.

### MORE?

Call your Intersil Sales Office or Franchised Distributor. Or, return the coupon below for complete information. \*100 pc price

### **INTERSIL SALES OFFICES:**

CALIFORNIA: Sunnyvale (408) 744-0618, Long Beach (213) 436-9261 • COLORADO: Aurora (303) 750-7004 • FLORIDA: Fort Lauderdale (305) 772-4122 • ILLINOIS: Hinsdale (312) 986-5303 • MASSACHUSETTS: Lexington (617) 861-6220 • MINNESOTA: Minneapolis (612) 925-1844 • NEW JERSEY: Englewood Cliffs (201) 567-5585 • OHIO: Dayton (513) 866-7328 • TEXAS: Dallas (214) 387-0539 • CANADA: Brampton, Ontario (416) 457-1014

#### **INTERSIL FRANCHISED DISTRIBUTORS:**

Advent/Indiana • Alliance Electronics • Arrow Electronics • Bell Industries/Century Electronic Division • CESCO • Component Specialties Inc. • Components Plus • Diplomat Electronics Inc., (FLA) • Diplomat Electronics Inc., (NJ) • Harvey Federal Electronics • Intermark Electronics • Kierulff Electronics • LCOMP • Parrott Electronics • R.A.E. Ind. Elect. Ltd. • RESCO/Raleigh • Schweber Electronics • Sheridan Associates • Summit Distributors Inc. • Wyle Distribution Group • Zentronics Ltd.

### INTERSIL

Analog Products—Low Power 10710 No. Tantau Ave., Cupertino, CA 94014 Tel: (408) 996-5000 TWX: 910-338-0171 (800) 538-7930 (Outside California)

#### Gentlemen,

City


\_ I'm interested. Please send me a sample of information on your CMOS ICM7555 (single) and ICM7556 (dual) precision timers. \_ Include your 18 x 24" Mark Twain poster.

	"Thunder is good, thunder is impressive; but it is ightning that does the work."
	Mentining that does the work."
	Wa Share
ı	ALLEGE MA.
	<b>法</b> 國際關係
	THE RESIDENCE OF THE PARTY OF T
	breaker this walk of the second or of the second the second

Name	_			
Company				
Address		4		7. 1

State\_\_

# Meet HP's new word generator... it imitates your system components for faster functional testing.

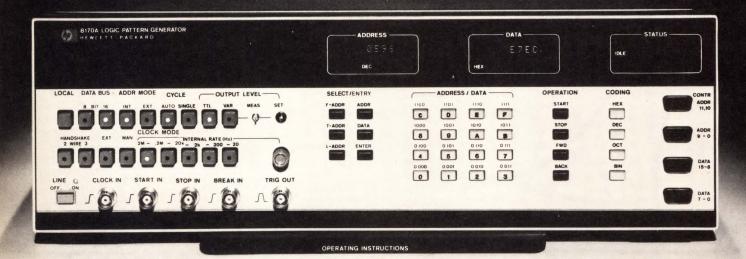

Hewlett-Packard's new 8170A Logic Pattern Generator can simulate a variety of components in your multi-channel digital system. It saves you the time and expense required to build specialized test equipment and to devise software for data simulation. And it speeds functional testing by giving you fingertip control of testing parameters.

Simulation of digitally controlled hardware. By simulating keyboards, tapes, printers or bus-compatible instruments, the 8170A simplifies at-speed functional testing of multi-channel hardware. The 8170A has a large 8K memory (32K optional) and gives you pushbutton selection of either 8 or 16 bit parallel outputs. Internal, manual, or external clocking allows dynamic testing at variable bit rates up to 2 MHz. With simple key strokes, you can start and stop data generation at any desired address, using whichever code you select. And you can step forward or back in single steps to any memory location for rapid debugging.

**Bus Stimulation.** Custom-built boxes with mechanical switches are no longer adequate for setting bus lines true or false for data simulation. The 8170A can simulate bus-compatible peripherals or instruments at speed for more complete system testing. Three-state outputs let you load the bus or effectively isolate the 8170A from bus activity. And the 8170A will generate data and data-valid signals in accordance with 2 or 3-wire handshake protocol.

**ROM Simulation.** Because of its external address capability, you can use the 8170A to simulate a ROM. Memory changes are easy to make, either through the front panel or under computer control via the HP-IB.\*\* This means fast and flexible ROM simulation for low development costs.

Big memory, easy access, remote programmability and real-speed sequencing all help simplify functional testing of your digital systems. The price of the 8170A is \$5430\* and includes HP-IB and RS 232C interfaces. The optional memory to 32K is \$545.\* Ask your local HP field engineer for all the details.

- \* Domestic U.S.A. price only
- \*\* HP's implementation of IEEE Standard 488-1975

089/



1507 Page Mill Road, Palo Alto, California 94304

For assistance call: Washington (301) 948-6370, Chicago (312) 255-9800, Atlanta (404) 955-1500, Los Angeles (213) 877-1282.

Personal computers

### There's life after TI

Relieved that the Texas Instruments home computer was not a crusher, producers are girding for a market spurt

by Larry Marion, Chicago bureau

The long-awaited entry of Texas Instruments into the home or personal computer market, expected to cause consternation among competitors, did not. At both the Summer Consumer Electronics Show in Chicago and the Personal Computing Festival held in conjunction with the National Computer Conference in New York, the reaction was a mixture of relief and surprise.

Computer exhibitors at Chicago's McCormick Place were glad to find a product priced at a level they could tolerate. But they were even more delighted to find long-hoped-for buyers from the mass merchandisers such as Sears and Montgomery Ward getting ready to set up computer counters in their stores.

The first thing most companies wanted to know about Ti's new 99/4 home computer was the price—\$1,150 for the basic computer, keyboard, and 13-inch color monitor from Zenith Radio Corp., Chicago [Electronics, June 7, p. 87]. "They're smiling with good reason—genuine relief over the price of the TI product," remarks industry analyst Benjamin N. Rosen, vice president at Morgan Stanley & Co., New York.

"It doesn't take too long a memory to recall what TI did to the consumer markets, first with its low-cost calculators and second with its cheap digital watches," another consumer electronics observer adds. "The computer companies had good cause to be scared about the price."

Despite the buildup, which has lasted about a year, the TI home computer arrived unexpectedly just days before CES opened. Controlled by TI's 9900 16-bit microprocessor, the 99/4 has 16 kilobytes of

random-access memory. Software selling for \$19.95 to \$69.95 will come in cartridges composed of read-only memories, a technique TI pioneered with one of its programmable calculator lines. Milton Bradley Co., Springfield, Mass., will also market some of the lower-priced TI software cartridges.

A variety of peripherals, including a solid-state voice synthesizer module costing \$150, a printer, and a floppy-disk drive, will be available later this year or next through independent specialty shops, such as Computerland, and a few major department stores.

Some yawns. Meanwhile, the reaction over at the Personal Computing Festival was similar to that at CES. Most exhibitors and onlookers, though excited that TI had finally broken the ice, wound up yawning at

the result. The primary disappointment was that TI opted not to show its cheaper version with an rf modulator, which has been held up pending approval from the Federal Communications Commission. Some complained about an inability on the part of the user to manipulate the monitor and graphics programs. The \$150 speech synthesizer, however, got excellent grades.

Says Thomas Whitney, executive vice president of engineering at Apple Computer Inc., Cupertino, Calif., "We were pleasantly disappointed. But if they had introduced the same machine in June of 1978, it wouldn't have been such a letdown."

Of course, many of the participants are migrating away from home or personal computers anyway, to concentrate on small businesses. It is obvious, too, which companies are


**Entry.** To make programming easy for the consumer, TI's 99/4 home computer features ROM-based cartridges that load into the console. The keyboard includes 47 keys.



### REDUCE CIRCUIT COSTS



# ERIE Tubular & Feed Thru Ceramic Capacitors



#### **ERIE TUBULAR CAPACITORS**

- Low cost
- Tubular shape is ideal for automatic insertion
- Low profile blends with high density packaging

ERIE Tubular Ceramic Capacitors are truly "a better way" to reduce circuit costs. In addition to these low cost, reliable capacitors, ERIE offers a broad range of Feed-Thru Ceramic Capacitors in mounting styles, capacitance ranges, TC types and voltages to suit any application.

These two ERIE-pioneered capacitor families are the finest quality in the industry. But then they should be, we've been building them for decades.

So check ERIE on your next capacitor buy. We probably have a standard design for your application.

Write for our new Fixed Capacitor catalog . . . or call 602-624-8231.



ERIE TECHNOLOGICAL PRODUCTS, INC. Erie, Pennsylvania 16501 602-624-8231

### **Probing the news**

after which markets by the conference they chose to attend. "TI is definitely home- and consumer-oriented," says Whitney, "but Apple is at NCC."

As a consumer product, TI's entry is viewed as a plus and a minus. On the one hand, it will expand the market because retailers will gain confidence in the concept now that a major electronics firm with an established name has arrived in consumer products. "It will add legitimacy to the market," says Peter N. Rosenthal, marketing manager for personal computers at Atari Inc. of Sunnyvale, Calif., part of Warner Communications Inc. Concurring, Gene Carter, sales vice president for Apple, estimates that TI's presence in the market could expand sales volume by 25%. Optimists see total sales of 650,000 units in 1979, while more conservative marketers estimate a modest 40,000-unit year.

Criticism. On the negative side, competitors and buyers were surprised at the high cost of the first unit and at the limited amount of software initially available. "You can't sell a computer for the home at that price," snaps analyst Rosen. Mattel Inc. of Hawthorne, Calif., and APF Electronics of New York, for example, have entry level units for \$500 that retailers say is the upper price threshold for mass merchandising. Each Mattel module—a controller with program car-

tridge port and a standard keyboard—contains a 16-bit microprocessor supplied by General Instrument Corp.

Critics also noted that TI's 47-key keyboard is nonstandard and the color monitor adds too much to the cost. Replies Peter L. Bonfield, division manager at TI for personal computers, "Separate monitors are an advantage in the home because users do not want to tie up their TV set." To which Atari's Rosenthal retorts, "If consumers wanted another video output, they'd prefer to buy a receiver, not a dedicated monitor."

As for the keyboard, TI says that, because of its previous experience with it, the type chosen is cost-effective and that in any case it is more suitable for consumer use than the large standard types (see photo). And although the software library may be skimpy at present, TI promises a wide selection later.

Applause. Drawing praise is TI's market planning. "It's a very powerful instrument for the market segment—you can't beat that price for something in between a real computer and a game," comments H. R. Kauffman, president of Exidy Inc., Mountain View, Calif.

One retailer likened TI's sales strategy to audio giant Pioneer's entry into the car stereo aftermarket—a lot of demonstration equipment requiring a minimum of dealer personnel to make the sale. TI's Ralph Olivia explains, "We want to make the computer sell itself at the point of purchase."

### Software for the living room

What will consumers program into their home computers? Makers such as Atari Inc. and Texas Instruments Inc. emphasize "self-improvement" software—education aids for both children and adults, plus programs to exercise the computers. The competitors are promoting their software like breakfast cereal. Atari has its programming endorsed by tax experts, while TI's education software was developed with the assistance of the Children's Television Workshop, creators of the long-running television show, "Sesame Street." Other companies, such as APF Electronics and Mattel Electronics, focus on games.

APF's line of games includes "Meltdown," a simulation in which players pretend to operate a nuclear power reactor and are responsible for preventing a meltdown within a limited time. TI and Atari, on the other hand, promote programs for adult use in everyday life—investment and estate planning, household budgeting, and income tax preparation. Foreign language training aids will be "very important," and voice synthesis chip modules like TI's will be marketed by most of the manufacturers, though they do not reveal who will supply the chips.

# YOU DON'T HAVE TO SEE THE LIGHT TO KNOW THE WAY.

Maybe you can't see the light from our infra-red LED components, but we'll show the way to successful opto design.

To start with, our SEP and SDP 8000 series comes in a low cost plastic package and offers a reliable replacement for the TIL 31, TIL 81, LED 55 series and L14G series.

And our photodiodes, phototransistors, photodarlingtons and GaAs diodes make up the broadest line of opto components in the industry.

Already, they've been highly successful in applications like automobile cruise controls, business machine paper detectors, vending machine and telephone coin detectors, smoke detectors, industrial controls, even fiber optics.

Or if you'd rather buy preassembled products, we offer industry standards in slotted interrupter



modules, optically coupled isolators and fiber optic modules. You can even get assemblies custom designed for your application.

So if you've got an idea for an optoelectronic design, let us know. We'll show you how to make it shine.

Give us a call at 214/234-4271. Or write us at 830 East Arapaho Road, Richardson, Texas 75081.

Spectronics
Adivision of Honeywell

©1979 Spectronics

Satellites

### Is it time to clean up space?

Skylab's fall underscores a growing concern over satellite junk, with the real threat possible collisions with debris still aloft

by Harvey J. Hindin, Communications & Microwave Editor

It started with random bits of metal falling in places all around the world, continued with the alleged killing of a cow in Cuba, and last year hit a peak with a barrage of pieces from a radioactive Soviet satellite peppering western Canada. This year the ultimate disaster everyone is worrying about may occur when the 85-ton U. S. satellite, Skylab, comes down—someplace.

Pieces of space junk—many very large—remain from the more than 11,000 man-made objects that have been orbited, mostly by the U.S. and Russia, since the Space Age began in 1957. There is no counting how many sensor covers, clamps, and broken or destroyed satellite parts jettisoned after launch, broken off by accident, or simply abandoned after use are out there.

Loose belts. According to Donald Kessler of the National Aeronautics and Space Administration's Johnson Space Center in Houston, Texas, "If we don't change the way we do business in space, it is inevitable that a broad belt of debris from collisions between orbiting satellites will form." What's more, he and coworker Burton Cour-Palais predict that the first major collision will occur within the next 10 to 20 years and a belt of fragments—much like the natural asteroid belts that exist in our solar system-will form within 50 years.

It may therefore be necessary to mount a cleanup operation, and NASA is currently studying the problem, according to Kessler. Though the space shuttle could be used for this task, reusable satellite systems would go a long way toward solving the problem. In fact, the Aerospace



Corp. of Los Angeles did a study that has been cited as a justification for use of returnable satellite systems. Scientists for the company say that by 1985 the probability of collisions could be as high as an unacceptable 10%, with 10,000 trackable items in space. (All objects, including debris, that are large enough or low enough to monitor, are followed by Norad, the North American Air Defense radar and computer system in Colorado Springs, Colo.) This

figure could go up to 20% by 1995, when there could be 20,000 items.

Smashup kills study. Probably the worst case of mission impairment in space so far, and likely caused by a collision, involved the Geos 2 magnetospheric observatory satellite launched by the European Space Agency. While much of the payload still continues on its merry way performing experiments, an accident to one solar panel has almost wiped out the entire low-energy plasma

Finally, you can have all the advantages of DMMs and none of the disadvantages of analogs

for about the same price.

DMM call (800) 321-0560

Telex: 98-5469. In Ohio,

call (216) 248-0400.

Circle #97 for literature Circle #96 for demonstration

Our new 169 is a tough, lightweight, battery-powered digital multimeter for use in the field or on the bench. It is a 3½-digit, full 5-function DMM with respectable .25% DC accuracy.

Its low-parts-count, high-efficiency design keeps power consumption to a minimum for longer component life and fewer failures. MTBF is 20,000 hrs. or about 10 years.

All 5 functions are fully protected—1400V peak on DCV and ACV, 300 V on  $\Omega$ , 2A (250V) on DCA and ACA. The fuse is externally accessible for quick replacement. Extensive vibration stress-testing assures the 169 will stand up to all the mechanical shock and abuse normally associated with tough applications.

Cost-conscious ease of maintenance is so thoroughly

Cost-conscious ease of maintenance is so thoroughly designed into the 169 that only one calibration adjustment a year is required. That adds up to a cost-of-ownership no other competitive DMM can touch. For example, the 169 needs only one battery change per year at a cost of about \$3.50. Its nearest competitor requires 10 changes costing three times as much.

When you factor in features like function and range annunciation right on the display,

auto-zero, auto polarity, 60% larger display than other DMMs and the easy-to-read, color coded front panel, we think you'll get the point. No analog meter or DMM can match the price/performance of the new 169. It costs \$149.

For information on the 169 or any Keithley



Keithley Instruments SARL 44, Rue Anatole France F-91121 Palaiseau Cedex FRANCE (01) 014-22-06


Keithley Instruments, Inc.

1, Boulton Road GB-Reading, Berkshire RG2 ONL UNITED KINGDOM (0734) 86-12-87 Telex: (851) 847047

Keithley Instruments, GmbH

Keithley Instruments Ltd.

Telex: (841) 5212160

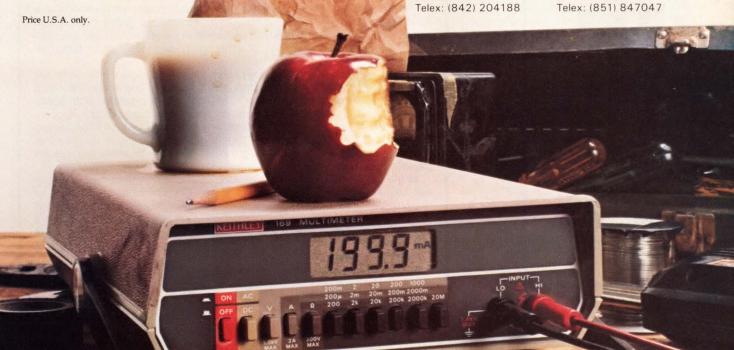


### Mottox microproce//or displays



256 X 256 to 512 X 512







COMPUTER TO TV MONITOR INTERFACE AMERICAN & EUROPEAN

A complete family of alphanumeric CRT controllers with display for-mats from 8 X 16 to 24 X 80. Resolutions from 256 X 256 to 512

VIDEO RAM:

GRAPHICS:

GRAPHICS: Resolutions from 256 X 256 to 512 X 512. Easily combined with alphanumeric VRAMs. Single board 256 X 256 X 4 bits pixel or multiboard to 512 X 512 X 8 bits pixel.

ALPHA CHIP: Single chip LED alphanumeric/ keyboard display.

ALPHA/GRAPHICS: Single board aspect ratio combination board 24 X 80 alpha and 240 X 320 graphics.

CUSTOM: Designed to fit specific needs.

Matrox offers a highly diversified selection of modules and PC boards allowing customers to solve display problems rapidly and cost effectively. These ready to use sub-systems are available off the shell in self-contained modules, for any uP, or on PC boards, bus compatible with DEC LSI-11, PDP-11, Mostek/Prolog STD, Intel/NSC SBC Multibus, Motorola Exorciser, and S100.

EVE matrox electronic /y/tem/

The Visible Solutions Company

5800 ANDOVER ROAD, MONTREAL, QUE. H4T 1H4 TEL.: (514) 481-6838 U.S. ONLY, TRIMEX BUILDING, MOOERS, N.Y. 12958

### **Probing the news**

study it was performing.

Some kind of physical damage to Geos 2 appears to have occurred after three days of successful telemetry. The stoppage was traced to the solar panel, which seems to have its output physically shorted to the metal satellite structure. Whenever the panel is illuminated by the sun, at regular intervals in the satellite's spin cycle, the electrical reference potential of the spacecraft jumps by

Because spacecraft voltage reference jumps caused by anomalous electrical charge variations in the space environment are not uncommon, Geos 2's solar cells were provided with a conducting indiumoxide coating that does not let charge accumulate. Unfortunately, this coating could also provide a shorting path if a collision brought the panel and the body of the craft into contact It seems clear that spacecraft designers will have to become litter-conscious or risk the consequences.

Meanwhile, the North American Air Defense Command, in its latest computer-based prediction, says that Skylab—all 170,000 pounds of it will come down in 50,000 pieces over

a 400,000-square-mile area. There is a 95% probability that that will happen between June 27 and July 21 of this year. Though much of the eight-story-high device will burn up or land in the ocean or unpopulated areas, there are several big pieces, including a lead-lined, 4,000-lb film vault and a 5,000-lb fixed airlock shroud, that could land almost intact. The thought of that much junk raining down from space makes people more than a little nervous.

Skylab's orbit is decaying rapidly at an uncertain rate. It was to have been rescued by the space shuttle using a special motor and control unit called the Teleoperator. But the contract for the rescue system made by the Martin Marietta Corp. in Denver, Colo., was canceled when the shuttle delivery slipped.

It is of some small comfort to know that the Government feels that it is generally liable for damages and, according to NASA assistant general counsel Richard Wieland, will give prompt consideration to claims on "a case-by-case basis." NASA's latest prediction is that there is only 1 chance in 150 of anyone being hit. The agency has, however, set up contingency plans with the Defense, State, and Justice Departments to "cope with any problems that may arise."


### Mind over matter in Skylab


It's his first attempt to rescue a satellite, but that inexperience doesn't bother Buryl Payne. The director of the Institute for Psycho Energetics in Brookline, Mass., says he will lead thousands of people in an attempt to harness their mutual psychokinetic energy in an effort to prevent Skylab from falling on anyone's head.


Trained in physics and psychology and normally a designer of biofeedback equipment, Payne will use radio station WFTL in Fort Lauderdale, Fla., for a broadcast to coordinate the effort. The National Aeronautics and Space Administration is not impressed with this approach. In any case it appears that some rival practitioners of psychokinetics plan to make an effort to help Skylab fall during the time that Payne's group is holding it up. Whether Skylab comes down or not, one group will be able to claim success for psychokinetic techniques.

At the same time, if NASA's predictions of when and where the big pieces will fall are not enough for restful sleep, Chicken Little Associates of Washington, D. C., is offering custom-tailored prognoses for a fee. They will sell the odds for a customer's special place of interest, whereas NASA's computer capability, alas, is only capable of more general statements. In fact, Alex Fraser of the Chicken operation says that NASA really has far less control over the reentry than it claims.

For its part, NASA is no doubt unhappy that—unlike the evil organization Spectre in the James Bond epic film "You Only Live Twice" -it cannot send up a satellite-eating satellite.

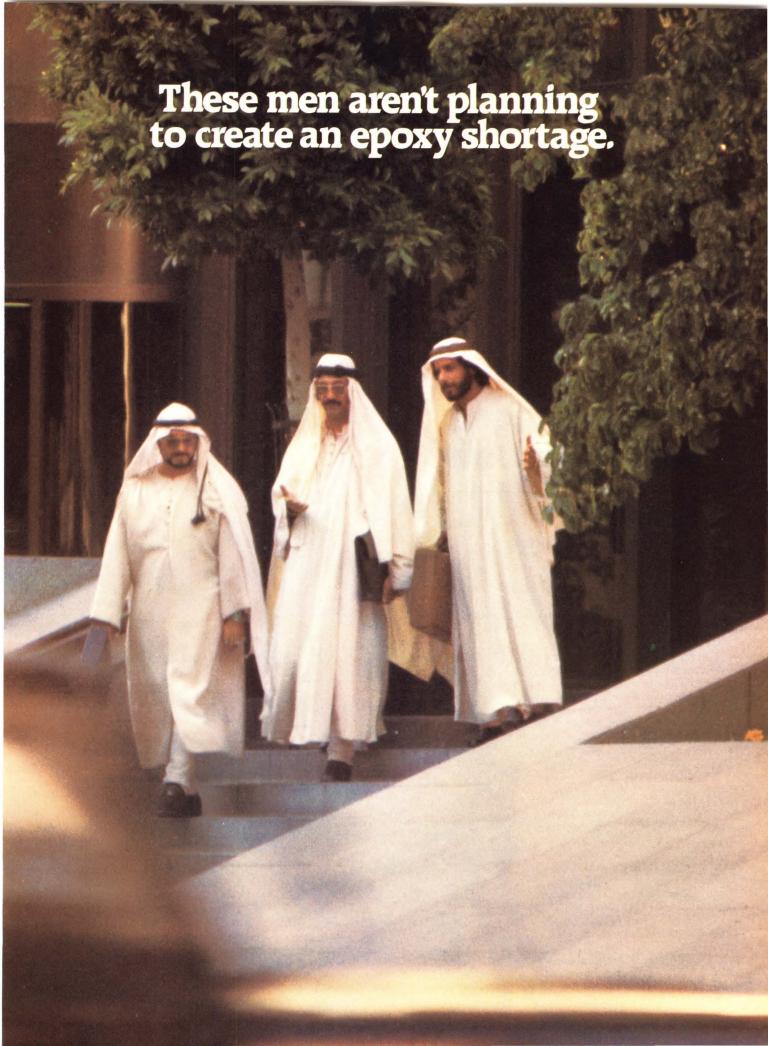

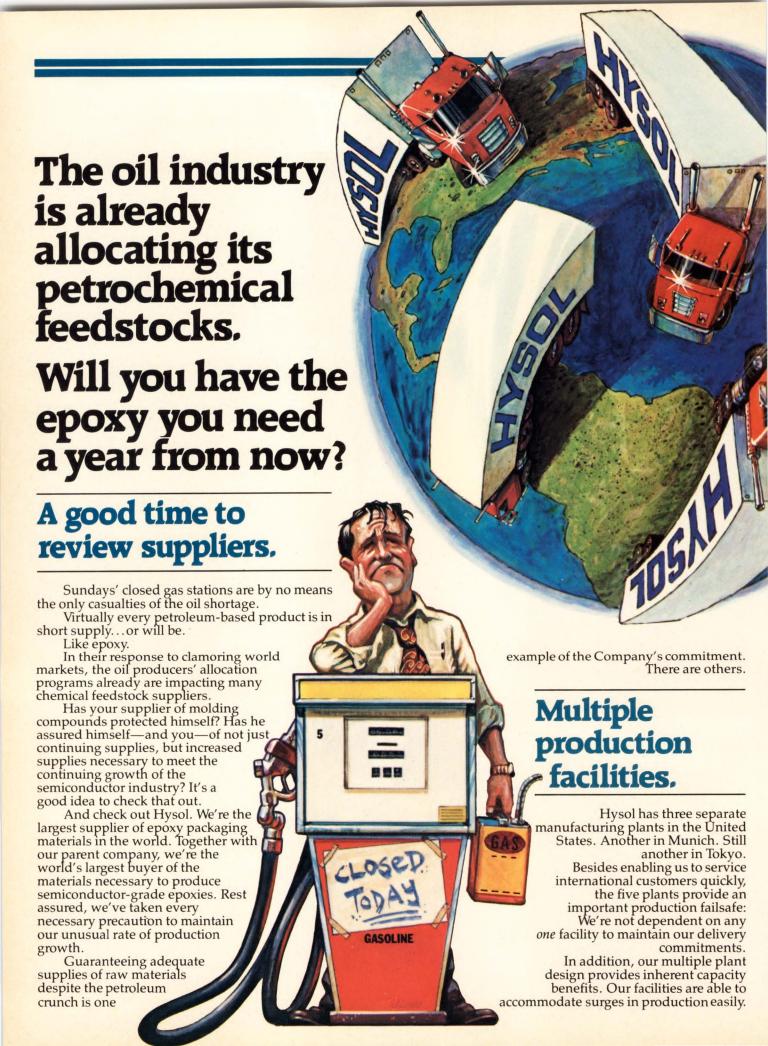



A look at Hysol's past provides further evidence of our commitment to the semiconductor industry.

In terms of dollars, Hysol's growth rate has equalled or exceeded that of the semiconductor industry. In terms of production volume, we're obliged to maintain even faster growth because the semiconductor industry grows at a greater rate in unit volume than in dollar volume.

The \$400 million Dexter Corporation, Hysol's parent company, has pledged its resources to assure this growth.

Hysol is the largest compounder of electronic and electrical grade epoxies in the world. We intend to hold that position.



Hysol's production of molding compounds has increased, in terms of dollars, even faster than the semiconductor industry. The yellow line indicates the industry's dollar sales worldwide for the decade. The orange line shows Hysol's dollar sales growth rate worldwide in molding compounds.

### Quality. Reliability. Productivity.

We're better than we have to be. Our quality and reliability exceed the requirements of the most demanding users.

The productivity attainable with our products is greater than any competitive products on the market.

How do we know this?

We've set up our own miniature semiconductor production facility for study. We even produce our own test chips. We encapsulate them in various configurations on our own production lines.

This capability accounts for part of our unusually high expenditure for research and development. And it explains our unusual level of understanding of our

customers' problems.



Why bother?

Understanding the problems of our own production is only half of our job.

We must understand our customers' problems... and even the problems of our customers' customers.

### Get to know Hysol.

Secured supplies of raw materials. Increased capacities made possible by multiple plants. Commitment to the semiconductor industry. Quality and reliability standards unique in that industry, aimed at boosting your productivity.

These are all excellent reasons to become acquainted

with Hysol Epoxies.


We'd like to tell you more. Why not give us a call at (213) 968-6511. Ask for Ron Benham, Products Marketing Manager, Semiconductor Molding Compounds.


Or write Hysol Division, The Dexter Corporation, 15051 East Don Julian Road, Industry, California 91749.



Circle 101 on reader service card

# Break your Testing Bottleneck! Get the NEW FLUKE 3040 Test System.

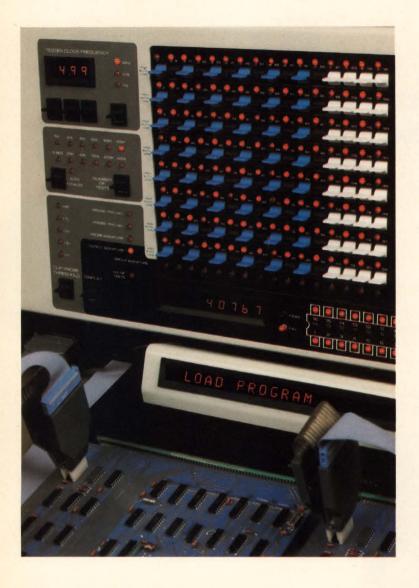



The new Fluke 3040 Board Tester provides:


- Increased Board Test Capacity
- High Speed Parallel Digital/Analog Capability
- Reduced Testing Costs

The high test speeds of the new FLUKE 3040 give you maximum test and diagnostic throughput with absolute minimum capital expenditure.

The computer guided diagnostics, coupled with over 12 manual diagnostic aids, insures maximum effectiveness of your PCB testing operation.

The capability for simultaneous testing of digital and analog signals improves test confidence and increases production throughput.


Your testing dollars are conserved with significantly reduced test programming costs—as big a difference as ten to one.



The new FLUKE 3040 makes use of a technique called Complex Waveform Conformance to allow testing of any waveform, regardless of its shape. And PCB's with Microprocessors, ROMS, RAMS and other LSI devices are readily tested in REAL TIME at speeds to 5 MHz.

Both user generated patterns and algorithmically generated patterns are available to provide the absolute minimum possible test programming time. Not only





does it cost less to buy the new FLUKE 3040, it takes less time to begin earning a significant return on investment.

If you've got digital/analog boards to test, especially boards with Micro-


processors and other LSI devices on them, the new FLUKE 3040 is designed just for you.

There are more Microprocessor board types being tested on FLUKE 3040's than any other dynamic PCB tester.




Want more information on how the new FLUKE 3040A works to save you time, money and aggravation? CALL COLLECT to (415) 965-0350 for details. Or contact your nearest FLUKE office.

Circle No. 230 for demonstration. Circle No. 231 for literature.



USA—Boston (617) 890-1600; Burbank (213) 849-7181, Chicago (312) 398-0850; San Francisco (415) 965-0350; Seattle (800) 426-0361 WORLDWIDE—England (0923) 40511; Germany (München) 089-404061, (Düsseldorf) 0211-450831; Japan 045 473-5425; Netherlands 013-673973; South Africa 011 786-3170

# How Litronix' opens a new world

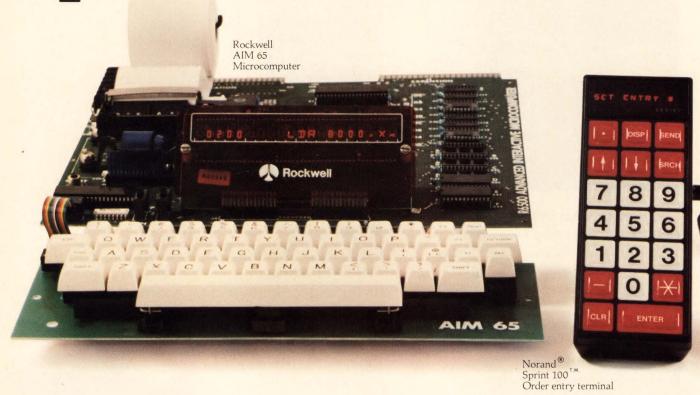

Now designers have a communications peripheral perfectly matched in size and cost to the world of microcomputers.

Litronix invented the Intelligent Display\* to give microcomputers a new way of "talking" to users in words, numbers or even sentences. And not surprisingly, these displays are already

Part Number	Features	Character Height	Horizontal Row Spacing	Vertical Row Spacing	Viewing Angle	Character Positions	Character Segments
DL-1416	Standard General Purpose Display	.160"	.250"	1.200"	±25°	4	16
DL-1414	Compact Display For Hand Held Equipment	.112"	.175"	.800"	±50°	4	16
DL-2416	Premium Display New Rugged Package	.160"	.250"	.800"	±50°	4	17

<sup>\*</sup>Intelligent Display is a trademark of Litronix, Inc.

beginning to create a new class of microcomputerbased products.

The Intelligent Display is an alphanumeric LED readout that incorporates ASCII decoder, multiplexer, memory and LED driver in a built-in CMOS IC. It interfaces simply and directly to any microprocessor bus, much like a RAM. Power is from a single +5V supply, and operating current is low enough for any battery powered device.

**Litronix puts intelligent communications** in the palm of your hand or anywhere panel space is limited. Three versions of the Intelligent Display are already available to fit a wide variety of applications. The smallest lets you fit 20 characters side by side in a space of only 3.5 inches.

Litronix' Intelligent Displays are already being used in the portable terminal, the low cost microcomputer and electronic translator above. They're also ideally suited for applications like control panel readouts. Handheld computer

# Intelligent Display of microcomputer applications.



terminals. "Smart" games and appliances. Educational products, and more.

Use Intelligent Displays in any

#### I INTERFACE JUST LIKE RAM

product that calls for alphanumerics. They'll reduce component count and cut costs dramatically. Since everything is encapsulated in a single package, design and production costs are

minimal. And because no display interface PC board is needed.

component costs are typically reduced by 25%. Typical OEM volume pricing per digit will range from \$2 to \$5 per digit,

depending on display type. For easy breadboarding with Intelligent Displays, ask about on Intelligent Displays, or for a demonstration, phone or write Litronix, Inc., 19000 Homestead

our inexpensive, prewired Evaluation Kit. To get

data sheets and a copy of our applications note

Road, Cupertino, CA 95014. Telephone (408) 257-7910.





Dr. Wang: "We were first with a unique, new approach to word processing—using microcomputers to implement distributed intelligence in multiple station systems. That approach has enabled us to increase our market share 50% a year in a market that's growing 40% a year. This year our word processing sales will pass \$100 million.

In 1974 they were just \$9 million.

"We decided on Intel's 8080 microprocessor for our distributed logic system. Only Intel offered PL/M, the microcomputer programming language we needed to get our software written quickly. So quickly that we introduced our system a year ahead of any competition. And Intel's tools for programming have continued to help us offer our customers the high quality software they expect from Wang."

Intel's extensive microcomputer design tools have helped hundreds of companies just like Wang Labs capture the marketing advantage with Intel microcomputers and semiconductor memory.


Our Intellec® Microcomputer Development System makes it possible and profitable for companies like yours to take full advantage of the promise and potential of the microcomputer. For example, the world's most advanced microcomputer, our new 16-bit 8086, is the first and only 16-bit microcomputer supported by a high-level programming language— PL/M, part of the total 8086 software development package available for the Intellec system.

> To begin writing your own success story, contact Intel Corporation, 3065 Bowers Avenue, Santa Clara, CA 95051 408/987-8080.

Intel's Intellec® Development System



# **Technical articles**



# LSI-based data encryption discourages the data thief

Commercial gear for secure transmission and storage emerges in response to Government standard

by Harvey J. Hindin, Communications & Microwave Editor

☐ Communications security has been the subject of much thrilling fiction, associated in the public imagination with military secrets, James Bondian undercover maneuvering, guards, locks, and midnight shootouts. But the age of electronic communication is changing all that; the only exotica remaining in the field are the increasingly sophisticated algorithms that govern the electronic scrambling of data.

Codes and secret ciphers existed long before the National Bureau of Standards decided to publish a data encryption standard (see "Codes throughout the ages," p. 110). Throughout recorded history, whether for reasons honorable or dishonorable, people have been developing and using new codes (as the old ones were broken and rendered useless) with all the ingenuity they could muster. And of course for every motive to encipher, there is an equal and opposite motive to break the cipher. A coding system's life expectancy is not a long one: that, at least, has not changed.

But the technological means are being revolutionized by computers and large-scale integrated circuits. The military and intelligence communities, of course, must stay right on top of the problem. Their insatiable need for information—not to mention the imperative to maintain military secrets—has long been met with brute force and budgetary power. Immediate cost-effectiveness is seldom the primary concern in this sphere.


But the commercial sector has its secrets, too. They may not be as sensitive as military ones, but they often revolve around important marketing strategies, contract bids, and the disposition of large sums of money. Those are subjects that businessmen take very seriously. Engineers also find themselves dealing with sensitive information about designs and construction decisions.

# **Corporate secrets**

There certainly is a market for secure voice transmission for telephone use; a tremendous amount of business is conducted by phone these days. Monitoring equipment that allows phone lines to be tapped with relatively little effort on the part of the eavesdropper is readily available. And with business offices becoming increasingly electronic in operation, their managers are looking for better ways to protect their dealings from competitors and disloyal employees.

The banking and financial communities are another prime encryption market. Fortunes are handled by means of electronic transmission and computer manipulation, and reports appear regularly of the clever new ways people have devised to get money by electronic fraud. Other obvious security markets include common carriers and service bureaus.

Individuals, too, are expressing increasing concern over their right to privacy. Insurance and tax records and



**1. Data conversion.** There are 2<sup>56</sup> or 70 quadrillion possible keys that can be chosen by the data-encryption standard (DES) algorithm user. If he picks simple, easily remembered keys, he forfeits the full security potential of this large number.

files kept by numerous other organizations are potentially subject to unauthorized electronic access. A citizen does not have to be a crook to want this access prevented.

Data-communications security hardware has been available for some time, much of it from European suppliers. But as the dependence on electronic communication grows heavier, the need for economical encryption grows with it. More and more users are looking for a coding system with what Sir Francis Bacon defined as "the virtues of a perfect cipher." He said that "it should not be laborious to write and read," and, more importantly, it should "be impossible to decipher."

In fact no known code is impossible to break. But a practical coding technique can be hoped for that requires so much time and computer power to break that it is not worthwhile to do so.

# **Defining a standard**

108

The National Bureau of Standards (NBS) has provided a strong stimulus for manufacturers of encryption equipment in developing its data encryption standard (DES). The nature of this standard is the subject of some controversy; in order to understand the controversy, the standard itself must be understood.

The Federal Information Processing Data Encryption Standard, originally published in January 1977, is a complex ciphering algorithm or defined set of rules. It is based on both substitution and transposition techniques, neither of which are at all new in concept. Substitution codes involve, simply enough, the substitution of one character or symbol for another. Transposition techniques involve rearranging the order of the characters or symbols according to some control pattern or key known only to the sender and the intended recipient.

In 1973, the NBS asked industry for proposals for an algorithm that would be suitable for data encryption in the commercial sector of the market. Not exactly overwhelmed with suitable replies, it asked again over a year later. The response from International Business Machines Corp. was considered to be the most suitable suggestion and the NBS published it in 1975, noting that it was being considered as a Federal Information Processing Standard.

It became a standard in 1977 for Federal agencies not involved in national security. However, it is clear that

the commercial market is picking it up also.

The DES defines a set of operations to be performed on a 64-bit block of information (the plain text) to encrypt it into a 64-bit block of scrambled information (or encrypted text). This is done under the control of a 56-bit key block chosen by the sender with the knowledge of the recipient. (Eight parity bits used for internal checking make the actual entered key word 64 bits long; these 8 bits are removed before the key is used.) In this manner it is possible to convert one 64-bit piece of plain text into any of 2<sup>56</sup> or about 70 quadrillion possible versions of 64-bit encrypted text (Fig.1).

The DES algorithm is available to all—indeed all the details have been published. The idea is that the security lies in the secret key just as the security of a lock lies in its combination. The extra degree of security that results when an algorithm is kept secret was not deemed to be important for the DES since it is intended "merely" for sensitive or critical commercial or civilian applications, rather than classified military or espionage ventures.

For the commercial sector, the advantage of having the algorithm known is that it establishes a standard for manufacture and comparison and allows products to be manufactured at a reasonable price. Previously available data-encryption equipment was hard to evaluate since no standards were available.

The algorithm is most efficiently implemented in hardware since the operations required can be performed by known microprocessors and peripherals as well as dedicated chips. However, software implementations are also available.


In essence, the algorithm takes a data block through 18 data-manipulation stages. Sixteen of these are identical except that they use 16 different internal coding keys derived from the 56-bit main key (Fig. 2a). The two others—the initial and final permutations—are fixed and do not require any key.

## Shuffle it around

In the initial permutation, bit 58 of the 64-bit input block becomes bit 1 of the output, bit 50 of the input becomes bit 2 and so on as defined in the standard. This is a simple transposition. The last step of the algorithm (after the 16 key-controlled manipulations take place) is the inverse of the initial permutation.

Between the initial and final permutations, the 16 identical data-manipulation stages are connected in series (Fig. 2b). Each of these stages performs a complex series of manipulations on the data (Fig. 3). The 64 input bits are first divided into a 32-bit left-hand and a 32-bit right-hand block. Then the 32-bit right-hand block is expanded into a 48-bit block by a defined procedure, the so-called E-box. The result is added (based on modulus two arithmetic) to a derived key that is a separate input to the data-manipulation stage in question.

The 48-bit block that results is then divided into eight 6-bit blocks, each of which determines an entry into eight data manipulations called nonlinear substitutions, or S-boxes. Each S-box output has only 4 bits. This yields a 32-bit result that is added again (based on modulus two arithmetic) to the previously untouched left

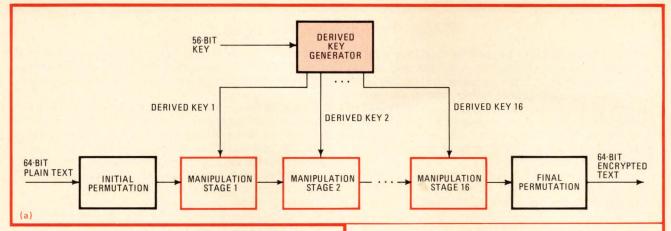

half of the original data block. The two 32-bit halves are then interchanged and another 64-bit block is produced that becomes the input to the next manipulation stage.

# Why so complicated?

If all this seems very complex, it has a specific purpose: the fundamental security of the DES lies in its internally complex structure. The role of the permutations is to so thoroughly mix the data bits that they cannot be traced back through the S-boxes. For further safety, the permutations in the derived key mix up the key bits to insure that they are all used equally, thus minimizing the probability of pattern detection. No key bit is ever used more than 15 times or less than 12 times.


The S-boxes insure that the algorithm is not linear. (Linear algorithms are more readily attacked than non-linear ones.) Each S-box output is related to the input by a nonlinear transformation that adds orders of magnitude to the decoding problem. The essence of this nonlinearity is data compression: each entry to an S-box has 6 bits but each output has only 4.

This is done by having 4 of the input bits determine a column and 2 determine a row in an S-box look-up table. The output is then the 4-bit S-box entry found in the location indicated by the row and column. The S-boxes are paralleled (Fig. 3).

The scrambling of the major governing key into the so-called key schedule is also important to DES security (Fig. 4). In this procedure, the 8 parity bits are removed from the 64-bit entered key to produce a 56-bit active key. This in turn is fed into two 28-bit registers whose contents are rotated by 1 or 2 bits for each of the 16 separate iterations. Another transposition operation called permuted choice 2 produces the 48-bit final key after the bits have been rotated in the registers.

It has been shown that similar algorithms without key schedules are weaker even if they have larger major keys. Yet the subject of larger keys is one that has caused controversy in the encryption community: there are people who say that the DES key length should have been greater than 56 bits. On the other hand, it is always possible to encrypt the same data word twice, in effect doubling the key size.

Critics of the DES are concerned about the motives of the standard's developers. Some of them also feel that the DES is not complex enough. At best, they say, it will

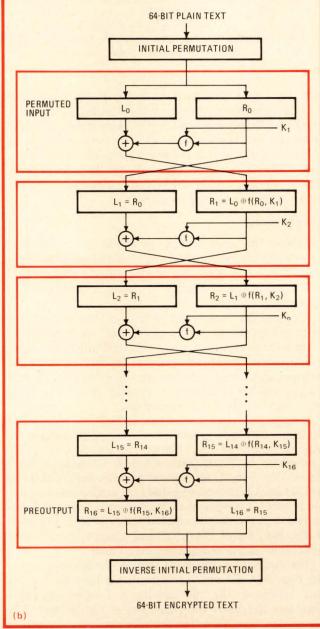

2. Multiple choice. Each of 16 keys derived from the main key is generated by a fixed, published algorithm (a). But the key and the sheer complexity of the 16-data manipulation stages (b) insure that the DES is in effect secure, at least for the immediate future.

# Codes throughout the ages

Ever since man learned to communicate by means of some permanent record such as a printed text, he has been interested in doing it in secret for reasons both honorable and dishonorable. In fact, one of the earliest forms of writing—Egyptian hieroglyphics—developed two distinct forms. These were the hieratic or priestly writing and the domestic form, which was for the common people. Priests were prohibited from giving away the secrets of the hieratic symbols.

Strangely enough—for reasons unknown—cryptography even occurs in the Old Testament. In the Book of Jeremiah there are two references to both the king and city of Sheshach. This was written off as an unknown place until it was noticed that the name of the well-known city of Babylon could be transformed by a simple substitution cipher of the Hebrew alphabet to read Sheshach.

To do this, all that has to be done is to write the first half of the alphabet on a piece of paper from left to right. Underneath this, the second half of the alphabet is written from right to left. The procedure is to replace the first letter by the last, the second letter by the next-to-last, and so on through the alphabet.

According to some authorities, this was the basis for other forms of substitution encryptions that were in turn the basis for secret writing by the monks of the Middle Ages. This gave rise to the complicated codes the Renaissance city-states used to conduct their wars and businesses. And of course the impact of all kinds of complex codes on modern warfare is well documented.

The most recent of these codes are so complex that they require digital computers for any attempt to crack them. Handling the massive amounts of data and looking for the subtle and infrequently recurring patterns which help the code-breaker in his art are way beyond the capability of an individual, even with the help of mechanical or electromechanical devices.

only be useful for the next 5 to 10 years; by then decryption technology and advances in large-scale integration and computer science will likely make it possible to break a DES encryption easily. This is the viewpoint of Whitfield Diffie of Bell Northern Research in Palo Alto, Calif. Diffie and his colleague, Martin Hellman of Stanford University, have advocated researching the so-called public-key system (see p. 115).

# Controversy

Though the better security of public keys is a matter upon which opinions differ widely, Diffie readily admits that "DES is the only system which at the present time can be implemented because hardware is available. So it has to be used now."

Much of the controversy may be attributed to legitimate disagreement on the merits and shortcomings of the new concept and just how they will affect the implementation of practical systems. It may be that the controversy's fires are also being stoked by the typically human problem of different originators of different ideas believing strongly in their own work.

Recognizing this, a reasoned attempt to address the problems that have grown up around the DES algorithm was mounted by the United States Senate Select Committee on Intelligence. Chaired by Senator Birch Bayh (Dem., Ind.), this committee released an unclassified version of its classified study of, among other things, "improper" involvement of the National Security Agency (NSA) in the development of the DES. It was released to the Institute of Electrical and Electronic Engineers' director of technical activities, Neil Pundit.

The committee concluded that in the development of the DES, NSA did convince IBM that a reduced key size was sufficient—the IBM-developed Lucifer algorithm that was the basis for DES used a 128-bit key. The committee also found that the NSA assisted indirectly in the development of the S-box structures. The NSA was also involved in certifying that to its knowledge, DES was free of any statistical or mathematical weaknesses. But the NSA says that the DES is an IBM invention, that it got

into the act after the fact and only classified some design principles.

The Senate committee agrees that the NSA did not tamper with the design of the algorithm in any way. IBM had invented and designed the algorithm and concurred that the key size was more than adequate for any commercial applications that DES might be used for.

As to the technical arguments on how long it might take to decrypt a DES message, the committee said it lacked the expertise to comment. But it did say that the overwhelming majority of scientists consulted felt that the security offered by the DES was more than adequate for five to ten years for the unclassified data for which it will be used.


The DES standards have now been discussed in public and one of the cardinal principles of the cryptographer's art has been upheld. The system has been under attack by experts in the field and they have not been able to show how to break it—even if they have raised many questions. It may be that the system is *de facto* secure if not *de jure*.

IBM has had faith in DES from the beginning. The DES development work was done by Walter Tuchman and Carl Meyers of the Communications Systems Development Laboratory in Kingston, N. Y. It took six years; the project's original objective was a cash-dispensing scheme for a London bank.

Tuchman and Meyers feel that the DES is secure for the foreseeable future—again, about 5 to 10 years. What is more, they say, even if a computer could break a DES encryption in a reasonable time (a big if, they think), it would cost so much and use so much power that it would not be practical.

## **Validation procedures**

Considering that a DES device has 2<sup>56</sup> or 70 quadrillion possible ways of coding a 64-bit data word, verification that everything is working well is no small task. It has been clear for several years that the application of some standard validation procedure by an acceptable testing agency would be very useful for all concerned.



3. Base two. The 16 data-manipulation stages are all the same; they are connected in series, with left and right block halves (32 bits each) reversed after each stage. The two addition operations call for exclusive-OR circuits, for addition in base two arithmetic.

With this in mind, the National Bureau of Standards built a hardware testbed facility to validate manufacturers' hardware implementations of the DES. Built in transistor-transistor logic, the NBS unit can perform an encryption or decryption in 6 microseconds.

The NBS system (Fig. 5) is microcomputer-controlled and makes its decision as to whether a submitted unit is functioning correctly on the basis of comparison tests with an NBS DES unit known to be functioning correctly. The microcomputer is loaded downstream with the test program by a time-shared program running on a PDP-11/45. For the validation test the unit under test is interfaced with the microcomputer in parallel with the NBS unit. All procedures are controlled by an operator through a CRT terminal.


In an actual test, the device under test and the NBS unit are run simultaneously and synchronously as the various test cases are exercised. The interface between the proprietary DES unit and the microcomputer port differs for each manufacturer and may be furnished by the manufacturer or constructed by the NBS.

The NBS testbed is only for hardware implementations of the DES algorithm since the DES is "a complex nonlinear algorithm that was designed with a view to efficient hardware implementation," according to Jason Gait of NBS's Systems and Software Division. He notes that software implementations are generally quite inefficient compared to hardware versions.

#### **Fast in hardware**

Despite its complexity, a DES implementation can operate at high speeds in hardware. The NBS DES unit takes about 6 microseconds to encrypt or decrypt one 64-bit data block; it takes about 26 microseconds to load a key or load or unload either plain or encrypted text. In contrast, typical software execution times are 30 to 100 milliseconds.

The nonlinear substitutions or S-boxes are the most important part of the encryption. Unlike the other parts of the algorithm such as the various data permutations, NBS researchers could not calculate a simple small number of inputs that would completely verify that the S-boxes work correctly. They were forced to use a statistical procedure—a Monte-Carlo routine—to come up with 19 device inputs which tested each S-box entry.

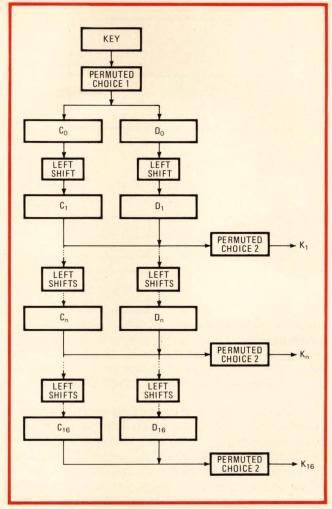


**4. Key derivation.** After 8 parity bits are removed from the user's 64-bit key word, the remaining 56 bits are split into two 28-bit registers. Multiple permutation operations produce the sixteen 48-bit derived keys used in the 16 data-manipulation blocks.

Fortunately other parts of the DES algorithm are analyzed more readily. For example, the keys are completely tested by using 56 specific data words for both encryption and decryption—a total of 112 tests. The initial and final permutations are tested by 128 more specific data words. These words, as a bonus, automatically verify the expansion operator E. Finally, the permutation operation P is checked with 32 more encryptions. A total of 235 encryptions and 56 decryptions do the whole job.

Any vendor of DES hardware to the Federal government must have his products validated by the NBS. The validation, however, only states that the product operates properly; no mention is made of reliability or quality control, which is left to the manufacturer. However, there is one more thing that the NBS does. With a test that may take up to eight hours, the NBS subjects the device to another Monte-Carlo procedure consisting of 8 million encryptions and 6 million decryptions.

These tests help to insure that there are no internal flaws in the device design. For example, they determine whether or not some combination of inputs causes the device to malfunction in some way that has nothing to do



**5. Validation.** The NBS certifies a commercial DES device by comparing its output to that of a proven, Government-built DES device. The maker may supply an interface for the hardware to be tested, or, given complete specifications, the NBS will build one.

with its implementation of the DES algorithm. They also insure that the device has not been designed just to pass the test that NBS gives it. "It's not a reliability test but it does check for operational error," says Gait. He adds that another thing the test does is insure that the device will never cause the key or plain text to appear at the output instead of the encrypted text—an obvious disaster from the security viewpoint.


#### **DES formats**

DES describes the algorithm by which a 64-bit block of data should be transformed into another coded 64-bit block of data under the control of a 56-bit key. DES does not specify how the algorithm should be formatted and configured in a system, although this is suggested by other documents. In fact, there are several different ways to configure a DES system.


Perhaps the simplest is the block-cipher format. This is an example of data-dependent encryption. In this procedure, each output bit is a function of all the input data bits. To do it, an input data stream is divided into 64-bit blocks that are successively DES-transformed into 64-bit output blocks. Unfortunately, an error in only 1 bit of the input can cause as many as 64 bits to be in error in the coded output.

The block-cipher implementation has the further weakness that identical blocks of input data appear, after encryption, as identical blocks of encrypted text. This violates one of the basic encryption security laws: never encrypt the same message the same way twice; it's easier for an adversary to break the code. But this problem is overcome with the block-chaining feedback approach (Fig. 6a).

In this mode, the 64-bit encrypted output is combined with the next input block by the exclusive OR (modulus

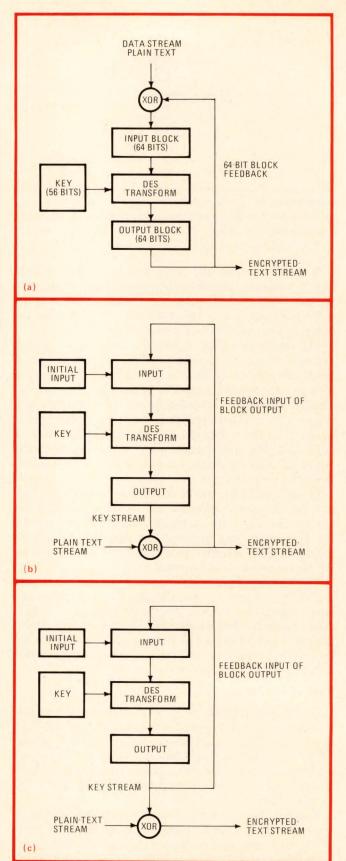

6. Feedback. Three basic DES implementation schemes are used, although many variations are possible. Block-chaining feedback (a) and stream encryption with encrypted-text feedback (b) are data-dependent techniques; stream encryption (c) is data-independent.

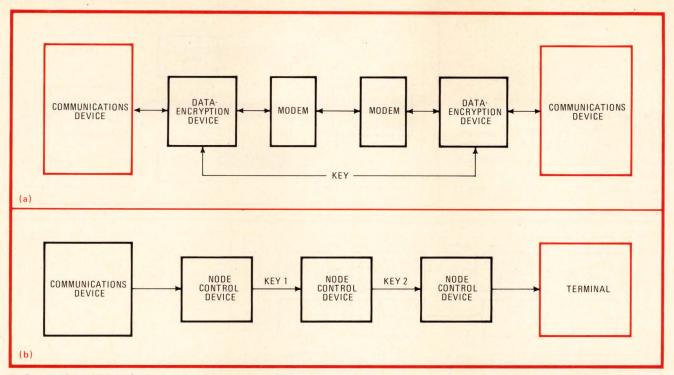

7. Connections. Link-by-link encryption (a) is readily achieved with stand-alone equipment. A node-by-node hookup (b) keeps the data in encrypted form everywhere in the transmission path, including the intermediate nodes. It is more secure than the link-by-link system.

two arithmetic addition) operation. An initialization signal is required to start the whole process. Unfortunately, in this system, the same error problems exist as in the block-cipher mode.

Still another data-dependent encryption technique is stream enciphering with feedback of encrypted text (Fig. 6b). Here, some bits of the data stream are exclusive-OR combined with a number of output bits. This is fed back into the DES input. Again, an initialization signal is required and a 1-bit input error can expand to cause all 64 bits in a block to be in error.

Occasional error-propagation problems may be tolerable in communications systems. Yet under some circumstances, such as a noisy narrowband digital signal in an encrypted-speech application, it is best to use a data-independent stream cipher (Fig. 6c).

In a data-independent system, the DES is only a random bit stream generator. Its outputs are bit-for-bit exclusive-ORed with 64-bit blocks of the data input stream. To decipher, it is necessary to exclusive-OR the DES output keystream with the encrypted input stream. Since the keystream output is fed back on itself, this system is called a key-autokey mode. In this approach there is only one error if one input error occurs. One of the many variations of this key-autokey approach is used in the GTE Sylvania secure voice system, which operates under DES control.

There are three approaches to incorporating encryption in a communications system. Which one is most appropriate depends on the particular application at hand. Variations of the basic three are required in certain specific applications.

Link-by-link encryption, perhaps the simplest technique, is readily implemented so that it is transparent—in other words, it has no apparent effect on the data


stream. In this approach (Fig. 7a), the encryption devices are placed in series with the circuit between data terminal equipment and data communications equipment. Its disadvantage is that all traffic has to pass through the central processing unit of any node in the uncoded state. At these points the data is susceptible to unauthorized access.

It is possible to modify the link-by-link approach to overcome the plain-text-CPU disadvantage. This approach is called node-by-node encryption (Fig. 7b). Each node uses a unique key and the conversion from one key to the other occurs within a security module. This is implemented as a peripheral to the CPU in question. At no time does plain text traverse the node.


## **Network requirements**

When complex switching networks are used to route information between a large number of senders and receivers, end-to-end encryption is required. This approach involves setting up a key-control center somewhere within the communication system. Each end point in the system is assigned a unique long-term key and only the center has a copy of all of these. When one end point user wishes to communicate with another, a request is sent to the key-control center. A temporary conversation key is generated at the center; this is then transmitted to the potential sender and receiver, encrypted using the long-term keys of both the sender and the recipient. Each decrypts the just-received temporary key by using his long-term key and the two parties are able to converse using end-to-end encryption with the temporary key.

The DES algorithm is being implemented with largescale-integration techniques using various process technologies. Many of these physical realizations—in hard-

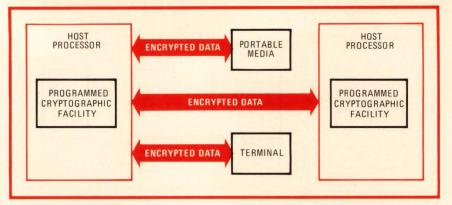

**8. In the system.** To provide centralized encryption control, IBM supplies a subsystem that is incorporated directly into operating-system architecture. All key management is done by the machine unless the operator explicitly overrides the control system.

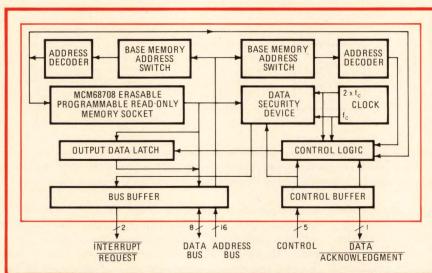

**9. Modules.** Plug-in boards occupy the middle ground between DES chips and stand-alone systems. The TTL-compatible Motorola boards have the DES implemented with a single n-channel MOS chip; room is left for the addition of user-defined functions.

ware—have been submitted to the National Bureau of Standards for validation.

All of the validated devices produce identical results given the same input data and key. However, NBS Computer Security project leader Dennis Branstad points out that "each manufacturer has provided various control functions for the devices, optimized various features such as speed, cost, size, and power consumption, and built them to fill an anticipated need in the marketplace."

# **Technical variety**

A summary of the key specifications of the validated devices—and several that have not yet been validated—shows that a great variety of functions may be satisfied and that, in the tradition of new semiconductor products, there is no general agreement among the manufacturers as to just which features the products should have and how they should be made.

Making matters more complicated, additional standards are required to make sure that the encryption devices in a communications system can communicate with each other. Communications standards and protocols do exist for computers and communications systems. This has minimized the number of codes, speeds, interfaces, and protocols that exist—or at least placed them under some control. But this has taken a great deal of effort. It is necessary to do the same thing for the efficient application of the DES standard and DES

devices; both Federal and American National Standards Institute standards are being developed.

IBM has made a major commitment to DES because, in the company's words, "it is estimated that by 1980, the volume of data traffic—much of it sensitive or proprietary—will exceed that of voice traffic over common carrier lines."

Typical examples of the IBM offerings are the 3845 and 3846 data-encryption devices. These are both meant to be attached at each end of a communications line between the modem and the computer or data terminal. Both units are essentially the same except that the 46 is rack-mountable and the 45 is meant for desktop use. A hand-held key entry unit is used to enter the keys and such pertinent information as protocol, speed, and so on.

Both units are extremely flexible, although the flexibility in some cases is provided by different models of the same device. Depending on the mode of operation, they can accept up to 19,100 input bits per second. Point-to-point as well as multipoint operation is possible as is half- or full-duplex operation. Most common codes such as the ASCII and common protocols such as binary synchronous and asynchronous data-link can be accommodated.

IBM's units operate in the encrypted-text-feedback mode. Encrypted data not only enters the communications channel but is fed back to play a part in the coding of subsequent data.

For those system users who are looking for central

# **Public-key systems**

Much of the controversy about and objections to the DES algorithm have been based on work by Martin Hellman of Stanford University. Hellman is a proponent of an alternate encryption scheme—the public-key system. In this approach, both sender and receiver use their own different-but-related keys; key transmission is eliminated.

In the public-key system, all encryption keys are published in a public directory with the user names. With each encryption key there is an associated but unpublished decryption key.

This latter key is derived by a complex mathematical relationship. Proponents of the system claim it is unbreakable since it requires the ability to factor very large numbers, something that is beyond even projected computer capabilities.

It is only necessary for a sender to look up his recipient's code and send an appropriate message. Only the recipient can decode it and all is well. As a side benefit, the electronic equivalent of a handwritten signature can be provided by a public-key system, eliminating questions as to the authenticity of transmitted information.

There is no hardware available to implement a publickey system at the present time. There have, however, been rumors in the industry that some interested parties are looking into this. Certainly the Government has not pushed it like the DES and no standards exist as yet.

Hellman's dislike for DES is based on what he feels are weaknesses in the system. These include certain symmetries which would allow for reduction in the brute force required to break a DES code. Moreover he says that there are some "questionable quasi-linear structures which might lead to substantial reduction in the required search effort." Both the NSA and the NBS say they are not aware of any methods of exploiting these effects.

Hellman has also estimated (on the basis of extrapolations of the growth of computer technology) the cost and time required for a determined adversary to break a DES encryption. For instance, he estimates that a \$20 million machine might search through all 70 quadrillion possible DES keys in a single day at a cost of about \$10,000. But even he admits that "this estimate has not met with universal agreement."

Tuchman and Meyers of IBM, the developers of DES, allow that the public-key algorithm has merits. But they say it must be researched, tested, and validated before it can be seriously considered for general use. Standards must be established and products and implementation procedures developed. It appears that Tuchman and Meyers aren't really knocking a public-key system—only pointing out that it doesn't really exist yet.

control of encryption procedures without the need for individual key entry by a key entry unit, IBM has a subsystem that operates under the control of system network architecture. This automates key management—a major security concern—in a manner that is transparent to the system user.

# **Automatic key management**

Basic to this approach is the so-called Cryptographic Facility Program Product. This provides support for encryption, decryption, and key generation (Fig. 8). Also important is the encrypt/decrypt feature that can be installed on the 3276 control Unit Display Station. This implements and controls the encryption operations through the system network architecture.

IBM also offers various software versions of DES for implementation on the System/370 computer series. Thus the do-it-yourselfer can selectively encrypt certain data and handle the encrypted information in some manner appropriate to the problem at hand.

Motorola Semiconductor has jumped into the DES market with both feet and come up with a line of gear for end users and original-equipment manufacturers. For the end users, the stand-alone DES4100NSM can be used with asynchronous, synchronous, or synchronous data-link control (SDLC) protocols in any data format and is system-transparent. It operates in any of the usual DES modes such as cipher feedback or block cipher and is controlled by an M6800 microprocessor.

The 4100 can encrypt data at up to 56 kilobits per second, depending on the mode of operation it is set up for—full or half duplex. One of the most important features, according to Motorola, is the fact that "not only can the encryption key be entered manually by the user but it can also be entered by the Info-guard Key

Manager, which is available as optional equipment."

In the key-guard system, the user is relieved from the problem of key selection because the key-management system provides random key selection. Key distribution is simplified by the key loader and a built-in feature that automatically takes care of working key changes. This unit uses a photodiode and transistor to receive keys from the 4100KGM key generator.

For original-equipment manufacturers who may want to buy data encryption boards to insert in their equipment, Motorola offers both the DES1100DSM and the MGD6800DSM data-security modules. These are both plug-in boards with the DES algorithm implemented with a single n-channel MOS device (Fig. 9).

# Plug-in boards

The 1100DSM is geared to users of Digital Equipment Corp.'s PDP-11 and allows for direct-memory-access (DMA) control with its on-board M6800 micro-processor. The purpose of the 1100DSM is to relieve the PDP-11 from time-consuming tasks by minimizing software impact. The unit is specifically designed for the encrypted-text-feedback mode.

In contrast with the 1100, the MGD6800DSM is designed to implement the DES in either the block- or cipher-feedback mode. It is set up to interface the Motorola M6800 EXORciser or Micromodule system. Moreover, it is TTL-compatible and can run at a 400-kilobit-per-second rate. It has room for optional erasable programmable read-only memory for control program or encryption key storage.

Just to make sure that no one is left out, Motorola's MGD8080DSM is compatible with the Intel MDS development system or SBC module family in either the block-cipher or cipher-feedback mode. It is also TTL-compati-



**10. Stand-alone.** Self-contained units such as this one from Collins allow the user to encrypt or decrypt data on a desk top; he may enter a new key at any time. The unit has physical security features and a number of key-management functions.

ble, with optional E-PROM and space for user-defined functions.

Unlike the vendors in the data-encryption market who plan to sell implementation chips to the DES do-it-yourselfer, Rockwell International Corp.'s Collins Telecommunications Products Division in Cedar Rapids, Iowa, is going after the end user who wants to buy a ready-to-go box. And for those who want the bulk of the DES work done for them, it is offering a data-encryption board that original-equipment manufacturers can put in their gear to do the DES job.

This card uses MOS logic under microprocessor control to achieve data rates up to 45 kilobits per second in either a simplex or half-duplex mode. It is capable, says Collins' Bruce Bjorseth, manager of data products, of either the block- or cipher-feedback modes. The card, dubbed the CR-300, interfaces with Intel 8080, Motorola 6800, and Rockwell 6500 microprocessors.

# **Desktop boxes**

Complementing the CR-300 is the CR200/220 data security unit. Either of these stand-alone devices (Fig. 10) uses MOS implementation to encrypt 2,400 bits per second for the CR-200 and 9,600 bits per second for the 220. The units are otherwise identical.

According to Bjorseth, "The user has a choice of fullor half-duplex and asynchronous or synchronous operation with either of these units. They can be used in either the single-link mode of encryption, the multipoint-link mode or the message-switch mode." In the first case, the unit is inserted between the host and its associated modem and a second unit is inserted between the data terminal and its associated modem. The second case—an extension of the first—encrypts the output of a host processor with a multiterminal link. A CR-200, for example, is used between each receiving modem and its associated data terminal.


For message-switching applications, the unit is inserted between each data terminal and the switched data network (Fig. 7a). Since some of the transmitted bits in such a setup are utilized to control the switching network for message routing, the CR200/220 has provision for removing such characters from the encryption procedure.

The units can handle asynchronous, bisync and bitoriented protocols [*Electronics*, Sept. 14, 1978, p. 175], according to Bjorseth. Just what data rate is achievable depends on the protocol and mode of operation.

A key-management system is built in so the user is somewhat freed from the key security problem. Keys are handled by a Rockwell-designed 40-pin key-generation chip built with p-type depletion-MOS technology. Feeling that the greatest need for DES is in the banking community, and since the American Banking Association has endorsed the DES standard, Rockwell has geared its initial marketing efforts toward that segment—at least for the stand-alone devices.

Burroughs Corp. has also had a data-encryption device certified by the NBS testing facility. But whatever the company is intending to do with it, executives are keeping it to themselves and "are not yet ready to discuss a product," according to a company spokesman. While it's not clear what they intend to do, it is doubtful they will offer chips for sale like Intel, Fairchild, Texas Instruments or Western Digital. They are most likely developing devices for end users of Burroughs data-handling equipment.

Users of satellite data services [Electronics, March 28, 1979, p. 91] are not being ignored. The Cryptoline service offered by American Satellite Corp.'s Satellite



**11. High rates.** It is possible to multiply the data-handling rates of DES chips by hooking them up as part of a parallel processing circuit. If n chips are used, the effective rate is multiplied by n, but synchronization and timing become critical factors.

Data Exchange Service is typical. It has been used in the earth stations operated by Western Bancorp since late 1978.

The American Satellite units provide DES encryption in a full-duplex mode at rates up to 112 kilobits per second for either synchronous point-to-point or multipoint operation. They are typically placed between the earth-station electronics and the user's data terminal.


# **Satellite security**

Other satellite data handlers have looked into encryption and their reactions vary as to its importance. For most data handlers, no decision has been made. Either their customers have not asked for the service or they will "provide it if it is needed," as RCA claims. The claim to such a quick reaction supports the theory that they will buy a stand-alone unit rather than build it themselves.

There are also many consultants and companies that offer software implementations of DES. Computation Planning of Bethesda, Md., has emulation programs for a variety of computers and is typical of the suppliers of this service.

Texas Instruments Inc.'s bid to capture a portion of the data encryption market is embodied in the TMS 9940 chip. This microcomputer can achieve a 4.8-kilobit-per-second continuous coding rate, according to Robert L. Budzinski at TI's Dallas facility. What is more, he says, "the TMS implementation is stand-alone, requiring only a data stream and a data strobe. No external memory is required and the implementation can easily be interfaced to a microprocessor bus using transistor-transistor logic."

The 9940 is a 5-volt device. Like Intel's chip, it is geared to the relatively slow terminals such as are used in banking transactions. It was readily adapted for this function from TI's 9940 microprocessor family, says



**12. Peripheral.** Intel's 5-volt device is a microprocessor peripheral with a direct-memory-access interface. Designed for banking applications, this device is byte-oriented, capable of handling up to 80 bytes per second or multiples thereof when paralleled with others.

Budzinski. Its instruction set is the same as that of the 9900 and the 9980 with the exception of three additional instructions. It typically works in conjunction with a 5-MHz clock.

The TMS 9940 can be operated in either the buffer or pipeline mode. In the buffer mode, data is transferred into the chip, the encryption or decryption is performed, and the data is transferred out, leaving the chip ready for a new cycle.

In the pipeline mode, new data is fed into the chip as previously encrypted or decrypted data is read out; the output rate is equal to the input rate. This allows the maximum 4.8-kilobit-per-second continuous rate to be achieved.


As with the Intel chip, paralleling the chips can deliver a much higher effective data rate. In fact, the use of n chips multiplies the rate by n (Fig. 11). In this scheme, each chip merely receives every nth block of data and chip coordination is furnished by chip-select inputs.

The Intel 8294 data-encryption chip is a microprocessor peripheral specifically designed to implement the DES for slow devices, according to Daniel Shafer, the company's microcomputer marketing manager. The 5-volt device (Fig. 12) may be used with the MCS-58, -48 or -80 processors and has a DMA interface to facilitate information transfer without having to go through the microprocessor.

The chip is byte-oriented and has a fundamental information-transfer rate of 80 bytes per second. Since the DMA interface is available, if necessary the 8294 can be paralleled to achieve information rates that are multiples of 80.

## Different jobs, different speeds

"The 8294 data-encryption chip, while not fast enough for real-time voice encoding and decoding like the Motorola Infoguard line, is nonetheless fast enough for

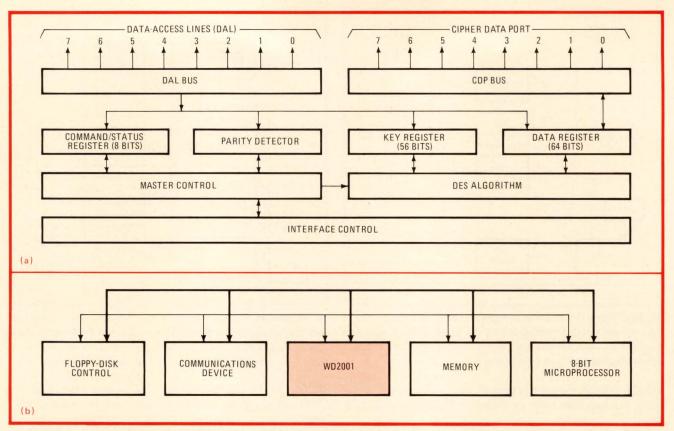

**13. Real time.** Western Digital's 2001 DES chip is bus-controlled and byte-oriented. It is compatible with many microprocessors and can operate at 176 kilobytes per second when driven by a 2-MHz clock. This is fast enough for most real-time applications.

virtually any computer application and is significantly less expensive than other products presently available," marketing manager Shafer points out.

Taking the n-channel silicon-gate approach, Western Digital Corp. of Newport Beach, Calif. has announced three DES chips with DMA and all inputs and outputs compatible with transistor-transistor logic. The WD2001E/F and the WD20002A/B are available as samples now; the WD2003 will be available in the last quarter of 1979.

The Western approach is a high-speed one geared to capture markets other than the banking institutions that will perhaps be the first volume customers. According to division vice president Charles Von Urff, the WD2001 can code at a 167-kilobyte-per-second rate when driven by a 2-MHz clock. Faster rates are available when the clock frequency is increased, he says, although 167 kilobytes per second is probably fast enough for most real-time applications.

# **Bit-slice chips**

The 28-pin 2001 is compatible with many microprocessors but is tailored to the 8080. It is bus-controlled and, like the Intel chip, byte-oriented. (The 64-bit input word may be viewed as 8 bytes.) The Fairchild 4-chip set is not byte-oriented; so far only Fairchild has gone to the bit-slice procedure to attain high speeds.


Western's 40-pin 2002 handles plain and enciphered messages on separate bus lines rather than multiplexing them on one as the 2001 does. This should appeal to military people who do not like to mix secret and non-

secret information (Fig. 13). The 2003 will be capable of performing in the cipher-feedback mode, but final specifications have yet to be announced.

In order to gain high-speed encryption and decryption, Fairchild Camera and Instrument Corp. engineers decided to implement the equivalent of parallel processing in their bit-slice four-chip set (Fig. 14). Two bits of each input byte are distributed to each of the four chips. Each chip has a separate input and output so that input and output can go on simultaneously. Chuck Erikson, manager of LSI logic design at Fairchild's Mountain View, Calif., facility, says this overlap procedure makes it possible to "get a data throughput of 4.8 microseconds per 64-bit word" at a 5-MHz clock frequency.

The four chips, 9414-1, -2, -3, and -4, are 40-pin integrated-injection-logic devices that must each be independently supplied with 100 milliamperes of injection current. Each chip has a pair of data registers, four 8-bit shift registers, control logic, and two 64-word-by-4-bit read-only-memory sections. They can be used in the cipher-feedback or the cipher-block-chaining mode to make the encryptions depend on past messages as well as the key word.

Fairchild's entry into the encryption sweepstakes is geared to capturing as much of the market as possible—it is fast enough to handle just about any device with output that needs to be encrypted. "It was clear," says Erickson, "that the data terminal market, which uses much lower speeds, is only a small percentage of the total market. We wanted a bigger piece of the action than that."

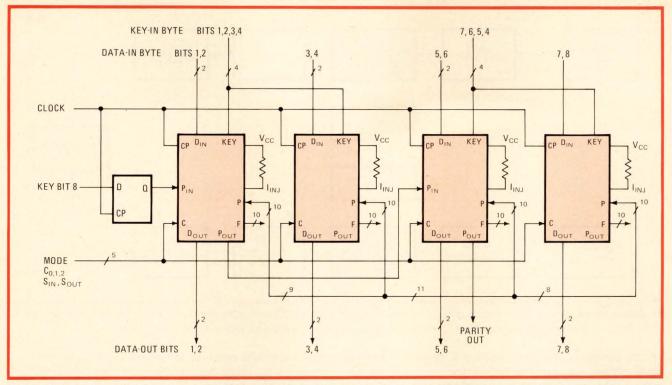

**14.** Lots of bits. The Fairchild DES implementation is a 4-chip bit-slice approach that takes 4.8 microseconds to encrypt a 64-bit word when driven by a 5-MHz clock. The integrated injection logic on each chip requires 100 milliamperes of injection current.

Fairchild sees a big market for its devices not only in communications but in the protection of stored data. Erickson says disk storage, for example, is a prime candidate for computer crime, and the need to protect it is great.

Racal-Milgo Inc. of Miami, Fla., is the latest entrant in the data-encryption market. Introduced last month, the stand-alone Datacryptor handles 9.6 kilobits per second in link-by-link or any other type of network configuration, using synchronous, binary synchronous, and other protocols. It is set up to operate in the encrypted-text-feedback mode.

Company president Edward Bleckner Jr. feels that the Datacryptor is a natural addition to the firm's line of data-communications equipment. Customers include banks, insurance companies, and commodities organizations, all of which have an interest in secure data handling.

Racal is making a master encryption device intended for installation at a central computer site, a remote unit for outlying points in a system, and a key transport module that stores DES keys for use at the remote sites. Up to 32 remote stations may be accommodated, and up to 32 different keys may be used at once. Allowance is made for transmission of both encrypted and unencrypted data on the same line.

# What did you say?

Right on the heels of the telephone's invention, a patent was filed for a speech scrambler—the need for secure telephone communications was recognized at a very early stage. Today the problem is acute.

A commercial voice security terminal designed by GTE Sylvania uses the DES algorithm to protect speech trans-


mitted over standard telephone lines. It consists of a voice digitizer, an encryption/decryption device and a modem (Fig. 15). Why has it been necessary to use such sophisticated technology?

The problem with telephone speech security has been to provide acceptable voice quality with high security over standard telephone lines. Early devices based on analog technology were relatively simple and provided moderate speech intelligibility by scrambling either voice amplitude or frequency. However, the security they provided was minimal and they certainly did not comply with the DES.

According to Joseph LeLellis of GTE Sylvania's Needham Heights, Mass., facility, its device "has a speech digitizer which uses adaptive-predictive decoding—a technique for removing the inherent redundancy in the speech waveform—to minimize the data rate required for intelligible voice transmission in a digital mode." Its 6,400-bit-per-second rate is low enough to go on a standard voice-grade line, yet the voice quality is quite satisfactory. LeLellis says a simple analog-to-digital conversion of a voice signal requires a data-transmission rate of from 48 to 56 kilobits per second. This is too high for conventional telephone line transmission.

While the a-d converter determines voice quality and the data rate that is required to go out over the telephone lines, the DES encryption device in the terminal provides the usual 2<sup>56</sup> possible encodings of the digital voice signal. Users of the system simply select an encryption key with thumbwheel switches on the voice-security terminal itself.

Most industry observers and participants agree that because of the tremendous potential for electronic crime, integrated security procedures using everything from

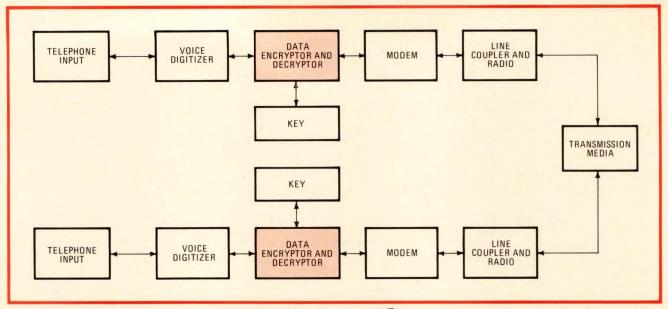

15. On the phone. Sylvania's stand-alone unit lets the telephone user encrypt his conversation with the DES algorithm whenever he wants to do so. The analog voice signal must first be converted into a digital data stream without excessive loss of voice quality.

armed guards to DES encryption will become commonplace. While no one yet knows the final size of the market, the evolution of DES products and markets is following classic patterns.

The concept has been introduced—although not without controversy—and in the words of one Rockwell International engineer, "the industry is in an evaluation phase. That's when a company that is a potential user buys two to five or so modules to get hands-on experience." This contrasts, he says, to the last two years or so when "interest was more literary than in applications." Rockwell expects the market to explode in 1981.

# **Optimistic projections**

Industry consultants are now getting into the act with their high-priced reports. Strategic Business Systems of San Jose, Calif., headed up by Michael Killen, has issued a study authored by public key advocate Whitfield Diffie. This study examines data-security questions from both the short- and long-term views. There are many problems, Diffie points out—export controls, patent laws, legal and security restrictions and the very newness of the market. But the study nonetheless estimates the market size as over \$243 million for general-purpose terminals in 1979 and about \$4 million for special-purpose secure terminals.

Another report, put out by Ken Bosomworth of International Resource Development in New Canaan, Conn., expects the current market—which the report estimates to be \$240 million in both the military and commercial sectors—to show a tenfold increase over the next five years. However, he does not expect U. S. shipments to increase tenfold because of the relatively low prices of the new LSI DES chips that are on the way.

In one study, IRD found that 30% of the large computer-communications users had set up study groups to look at data encryption. This tends to support Rockwell's view that the industry is in the evaluation phase.

Of course, the greatest stimulus to the use of DES

equipment will come as the algorithm is accepted as a standard by those organizations directly involved with data-security problems. A major step in this direction was taken when the American Bankers Association endorsed DES as "a significant step forward towards the encryption of electronic funds-transfer networks." It also seems that even the most outspoken opponents of DES (on a security basis) are agreed that it will be useful for at least the next few years. And the investment of the various semiconductor houses and computer companies would certainly seem to support that view.

Since the Federal DES is showing signs of becoming the U. S. commercial standard, many potential manufacturers and users of equipment complying with the algorithm want to try it out. For some of them, the software approach is easiest since general-purpose microprocessors or computers are readily available.

In theory, the National Technical Information Service document FIPS-PUB-46 tells all that is required. Yet, in practice, says G. Yuvel of the Wisundig Seminarium of Vrije Universiteit in Amsterdam, the Netherlands, "since the document contains no worked examples, not only is it hard to debug an encryption program, there is no way to discover that there even is a bug in it."

To help solve this practical problem, Yuval has published his software program (report IR 46) and compared his results for worked examples with the results of other people's work. Since the results agree—except for some mistakes that were determined to be typographical errors—and it is unlikely that different programmers working separately will make the same programming mistakes—Yuval has concluded that the published programs are bug-free.

Report 46 also has a printout of all the stages of the encryption for 10 specific examples. By following these results, a programmer should be able to localize the source of any troubles he may have.

A reprint of this special report costs \$3.00 from *Electronics* Reprint Department, P. O. Box 669, Hightstown, N. J. 08520. Copyright 1979, *Electronics*, a McGraw-Hill publication.

# Writable control store saves microprogramming time and expense

Microprocessor controls the transfer of assembled microcode from a development system to a user's prototype

by Joseph A. Oberzeir, National Semiconductor Corp., Santa Clara, Calif.

☐ The growing number of uses of microprogrammed, bit-slice architectures has highlighted the need for a more efficient way to develop and test microprograms. The usual technique for testing and transferring assembled microcode to the host machine is to fill programmable read-only memories (PROMs) with test routines, but this wastes expensive devices as well as considerable programming time.

In most cases, though, test microprograms are short and therefore relatively easy to debug. Hence, a small writable control store (WCS), on line to a software development system, would considerably expedite the development of microprograms and save PROMs.


Microprograms may range in size from 256 32-bit words to 4 kilowords by 64 bits or even larger. They are usually developed via a microassembler, reducing syntactical errors and generating a binary image of the microcode. The machine that hosts the microassembler may be either a time-sharing network or an on-site development system. Development time for the latter is usually shorter than for the former because PROM-

burning hardware is on hand and because there are few transmission and turnaround delays.

Microprogramming is a powerful technique for designing fast, complex, or special-purpose processing systems such as disk controllers, signal processors, and flight computers. Such systems are generally computation-bound; that is, the execution speed of the processor limits the overall performance of the system. In most cases, these demanding applications rule out the use of readily available microprocessors whose instruction execution times range from 1 to 15 microseconds. The large number of general-purpose instructions required to perform a given function also restricts their use.


A microprogrammed controller, on the other hand, because of both its custom instruction set and its architecture, is extremely fast. Such high speeds in a microprogrammed system are attained primarily by paralleling as many operations as possible and, of course, by using bipolar components instead of MOS devices.

As seen in Fig. 1, a microprogrammed controller can be divided into three main blocks: a control store within

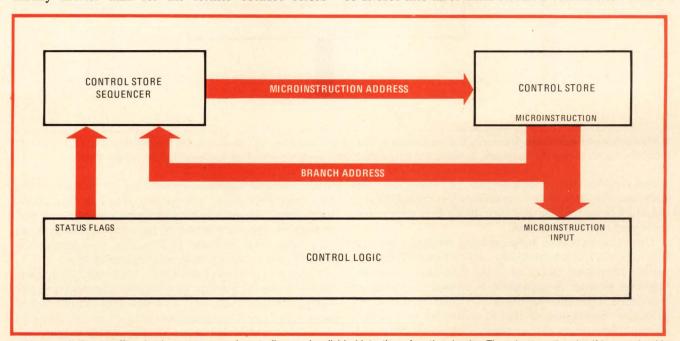

1. Microcoded controller. A microprogrammed controller can be divided into three functional units. The microprogram itself is contained in the control-store memory while the sequencer steps through the memory's addresses. The logic carries out the current microinstruction.

121

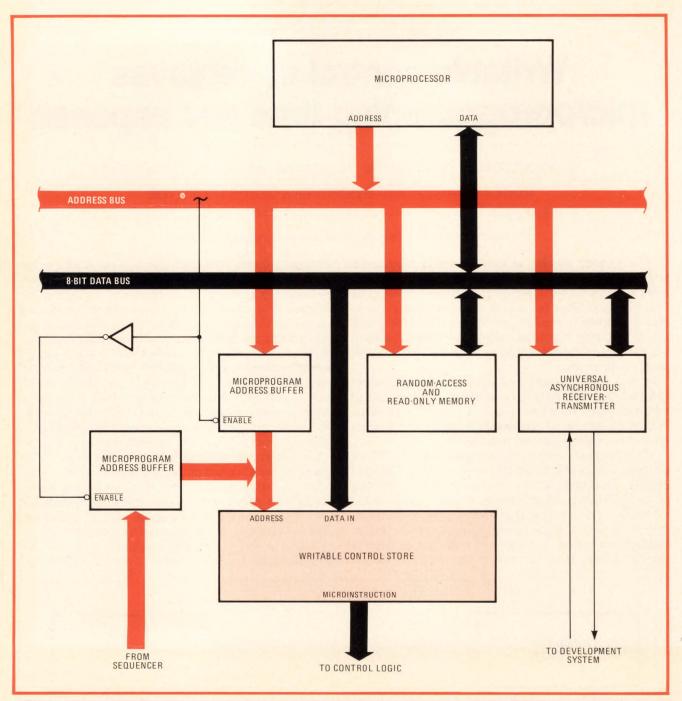


2. Microprocessor-controlled. Microprograms are downloaded into this development tool via a serial link. The microprocessor addresses the WCS (see Fig. 3) to load the microcode. To test the code, another buffer is enabled so that the sequencer can access the RAM.

which resides the microprogram, a sequencer that addresses this control-store memory by stepping through the microprogram, and the logic block that implements the current microinstruction.

This system operates by sequencing through a memory that contains microinstructions, which in turn direct the various functional units tied to the data bus. A microinstruction, or word of microcode, is divided into ranges of bits called fields that control a particular section of the processor. Sometimes all that is controlled by a field is the input to a single gate or the address to a multiplexer. Other controlled functions may include bus-driver enables, the source and destination of registers, the

arithmetic and logic unit's operation, the address of the next microinstruction, and conditional jump data. Since for each microinstruction many functions are performed in parallel, the word length of the control store can get very long, often topping 32 bits. For high speed, the control store is usually built with bipolar PROMs.

Clearly, the microprogrammer must attend to many details to ensure that all program development aids are considered. Unfortunately, although great attention has been given to microprocessor emulators for software development and hardware debugging, few tools are available for the development of microprograms. Yet the writing of the microprogram is one of the most impor-

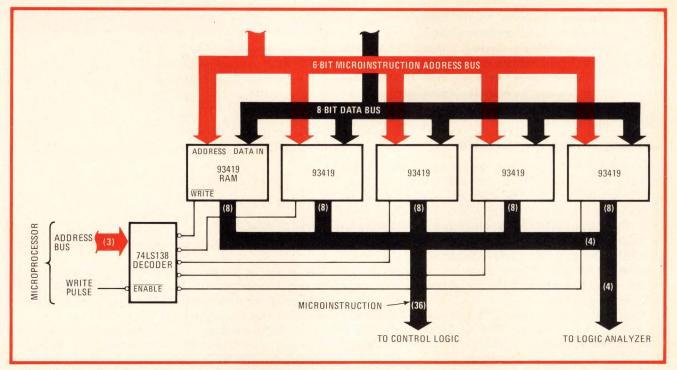

**3. Writable store.** The 64-word-by-40-bit writable control store shown above uses five 93419 bipolar random-access memories. Thirty-six of the bits are actually used by the microprogram, and the remaining four are routed off, in this case, to a logic analyzer for debugging.

tant phases of the design cycle, and care must be taken to see that this firmware is developed efficiently.

A microprocessor-controlled writable control store is shown in Fig. 2. This development tool communicates with any software development system over a serial link conforming to the appropriate Electronic Industries Association standard, to accept test microprograms. Most debugging sessions require small microprograms, so that a relatively small microstore is needed. However, should it be necessary to test an entire microprogram, more random-access memory can be added. Also, some interconnection has been omitted from the figure: a minor amount of logic—to enable the memories, for example—is excluded because it depends on the central processing unit selected.

Figures 3 shows a 64-word-by-40-bit writable control store with 93419/N82S09 RAMs used individually in a 64-by-8-bit configuration. Thirty-six bits are required by the microprogram, and the 4 extra bits are used as flags—to trigger an oscilloscope or logic analyzer, for instance—facilitating both hardware and software development.

The worst-case access time for a 93419 is 45 nanoseconds; when combined with the delays added by the address buffers, capacitance effects, and line-interconnection delays, this value can exceed 65 ns. Should the latter figure be excessive, other TTL RAM configurations can be considered before resorting to emitter-coupled-logic RAMs (and associated TTL interface components) for the WCS.

A data-transmission format is shown on p. 124, and an accompanying structured control program on p. 125. Just about any microprocessor may be used, as the execution time is not critical. Similarly, any transmission format may be used. The one employed here was chosen

because it is perhaps the least complicated to implement and shows the general program flow. Also, should spurious noise be a problem in transmission, a check sum for error detection may be implemented.

# **Development**

In a typical development session, the user first edits, assembles, and links a test microprogram on the development system and resets the writable control store's microprocessor. Then a loader program on the development system is called to transfer the assembled microcode into the WCS. The microprogram is executed using a logic analyzer as a debugging tool. As always, specialized test microprograms are helpful in reducing microprogram debugging time.

The actual work that must be done to construct the WCS is threefold. First, hardware for the development tool (microprocessor, WCS RAM, input/output interface, and so on) must be designed and constructed. As seen in Figs. 2 and 3, the hardware outlay is not very substantial and should take roughly about two man-weeks to design and build.

Second, the software for the microprocessor must be written. As indicated in the program shown, it is not very complex; about two to three weeks should be sufficient. Additional software must be written to enable the development system to transfer the microprograms; for most systems, that will take about one to two weeks.

Although allowing considerable improvement in turnaround time, a WCS is not the whole answer. If microprogramming is a considerable part of the product-development cycle, it may be advantageous to place the control inputs of the target system under control of the development system. This allows greater control of conditions in the target system from the programmer's console. Also,

a close look must be given to the available software packages suitable for microprogramming.

Microprogram software packages range from timeshared services to full-blown development systems that include computers, disks, printers, and development boards already having a writable control store. Ascertaining what is absolutely necessary for the user is difficult but essential.

# Choosing development software

Consider the designer who wants to use an existing in-house minicomputer to develop microprograms. First, a microassembler must be acquired, and it must be written in a language that the minicomputer can compile. Also, the I/O and file-handling routines will have to be customized for the particular installation. Next, the user has to develop the capability to download the microcode into a writable control store for execution on the target system. A solution to this problem has already been discussed above.

A method of programming PROMs must subsequently be provided. This can be done by generating either a paper-tape load module suitable for PROM programming or a mask list for fabricating ROMs.

This programming burden—that is, the need to write all that software even before starting to write the microprogram—may be eliminated by calling in a consultant firm or by buying the whole system, including hardware, from one supplier. The former merely transfers and amplifies the cost and guarantees little. The latter ensures data compatibility—an operable system—at the risk of locking the purchaser into one vendor. This possibility can be highly undesirable, given that there are few of these vendors and their after-purchase support may be limited, at best.

If the user wants optimal software capability and is willing to face the burden of modifying an off-the-shelf software package, he needs some criteria in order to make a selection.

#### **Primary programs**

Three primary programs are used in the development of microprograms: an editor to create and modify, on disk, the microprogram; a microassembler that processes the definitions, symbols, and mnemonics that make up the microprogram to produce binary microcode and to save it on disk; and a binary loader that reads the microcode file and loads it into the development system memory or a WCS for execution.

In the past 10 years, editors have improved considerably, but there are still many that are difficult to use and waste a lot of time. The editor should be well documented, with an easy-to-use manual showing disk and memory data formats, as well as source program requirements. It should be disk-based and have a paging capability. A user developing a microprogram text file that will not completely fit into memory should still be able to list and edit microprograms.

A search-on-string capability is helpful for editing, as it makes it possible to find any particular character string within the body of the text file. Insertion and deletion of characters and lines in the body of the file

## **ASCII TRANSMISSION FORMAT**

The microprogram data format will be made of n data blocks, where n is the number of used microinstruction locations and each block is composed of an address and microinstruction in the form:

|<spaces>| <address> <space> [<spaces>] <microcode> <EOT>
where: <address> :: microcode load address in hexadecimal

ASCII

<microcode> :: microcode to be loaded into WCS

left justified (toward MSB) in hexadecimal ASCII

<EOT> :: carriage return

should also be possible: plenty of mistakes will be made, so why retype an entire line of code just to change one misspelled word? Finally, tabs are handy for making the program easy to read and write.

The microassembler, too, should be well documented. Ideally, it should be based on a language that the user is already familiar with, and it should be easily modifiable. A structured Algol-like language is best, but software written in languages such as Basic and Fortran is still most easily transported from system to system, since many compatible compilers already exist for them. Also, programs written in languages that do not lend themselves readily to structured programming techniques (such as Fortran and Basic) may be well designed in a top-down manner and be easy to modify. If software is purchased for an existing development system, either the programs have been written for the specific machine and operating system or they must be modified.

# The microassembler

A disk-based microassembler is a must—microprograms and their load modules get too large to reside in available memory concurrently. If a microprogram is encountered that will not fit completely into available memory, it should still be assembled, so, once again, a paging capability is desirable.

The assembler needs an easy-to-use syntax. It should not be verbose or require many specialized delimiters: many different, special characters to separate symbols and mnemonics—for example, /)(\$#&''!@—make the microassembler difficult to use and can hide poor program design. A free-format text input is useful so that time is not wasted learning complicated spacing or tabbing requirements.

The assembler should recognize reserved words for a particular ALU and sequencer. For example, for all 2901 microassemblers, the mnemonics ADD, PASS, DECREMENT, and INVERT are reserved and should have defined meanings. However, the capability to redefine and add reserved words lets the user update the microassembler easily to include new bit-slice chips and sequencers that may have the same mnemonics as earlier units. An additional convenience is the ability to change reserved words by means of a data file on disk.

Symbolic and operational field assignments should

## CONTROL PROGRAM FOR MICROPROCESSOR

```
this program outlines the steps needed to implement
    the preceding data transmission format */
    subroutines used are:
           gets characters from serials link
           asciis hexadecimals tos binarys conversion
           transfers microcodes buffers tos WCS
           errorsprocess */
Enters afters reset : PROCEDURE
   get microcode - nibble at a time
                   - load it into a buffer as wide as the microword */

    transfer it if no errors into WCS */

      microwords nibbles pointer = 0:
      DO WHILE inputs character < > SPACE;
         CALL asciis hexadecimals tos tos binarys conversion:
         IF notshexadecimal THEN
           CALL errors process:
         ENDIF:
         microwords bytes pointer = microwords nibbles pointer / 2;
         IF (microwords nibbles pointer - 2 * microwords bytes pointer);
           /* right justified nibble */
           microcodes buffer (microwords bytes pointer, 3:0) = hexsdigit;
           /* left justified nibble */
           microcodes buffer (microwords bytes pointer, 7:4) = hexsdigit;
         ENDIF:
         /* get another microcode nibble */
         CALL getscharacters from serials link;
      ENDDO:
      CALL transfers microcodes buffers tos WCS
   wait for carriage return */
      DO WHILE inputs character <> CARRIAGEs RETURN;
         CALL gets characters from serials link;
      ENDDO
 DO WHILE 0 = 0;
                                            continuous loop */
    get leading spaces */
      CALL gets characters from serials link;
      DO WHILE inputs character = SPACE:
         CALL gets characters from serials link;
      ENDDO;
    get microcode load address */
      DO WHILE inputs character <> SPACE;
         CALL asciis hexadecimals tos binarys conversion:
         IF notshexadecimal THEN
           CALL errors process;
         ENDIF:
         microcodes address=microcodes address * 16 + hexs digit;
       ENDDO;
    get delimiter spaces between address and microcode */
       DO WHILE inputs character = SPACE;
         CALL getscharacters from serials link;
       ENDDO;
   ENDDO;
ENDPROC;
```

depend on the physical layout of the control-store PROM's data outputs. An individual operation field may not be contiguous from least to most significant bit—pieces of the field may be separated physically by several bits—and this must be reflected in the assembled code.

A good expression analyzer will save a lot of time otherwise spent calculating constants and branch addresses. The use of this feature depends on the application of the microcode.

Complete control of the microcode is also a must—every bit must be under program control. Conditional assembly is important, too, for should one microprogram be written to support more than one similar architecture, conditional testing may be essential.

A macro capability saves a lot of time writing programs with instructions that have common internal microinstruction sequences. A relocation capability, too, is handy for a microassembler. This allows modules of a microprogram to be developed and tested independently of the rest of the program. Also, comments should be insertable anywhere in the program that is appropriate, and several output formats should be provided to make the job of reading and debugging easier—a particular microassembler should not force the programmer to use a particular editor or loader. Furthermore, the host machine should be powerful enough for fast compilation: waiting half an hour or more for a program to be compiled is tedious and costly.

## The loader

Although a WCS unit greatly enhances the programming process, it does need to be supported by a dedicated loader to transfer microcode into the WCS from the disk file. Like the editor and the microassembler, the loader should be well documented and easy to use. In particular, disk and memory data formats should be well explained, and adequate source-program documentation should be provided.

Modification is also significant for the loader. Again, the language the loader itself is written in is important, as is its ability to implement structured, readable programs in a top-down manner. Finally, if the microassembler is equipped with relocation capability, the loader, too, must have it.

Unfortunately, continued software support by the vendor after bugs are discovered or modifications are required is always a headache. The service contract or warranty on the software should be scrutinized carefully before selecting a supplier. The cautious buyer will find out who the vendor's satisfied customers are and talk to them about the service they have received.

Often the purchase of a microassembler software package is done with little thought of future usefulness (inclusion of new bit-slice devices, sequencers, unusual word lengths or depths, and so on). Perhaps this approach is still economically viable, given the added cost of software flexibility, but it will always cost considerably more in the learning of each new microassembler.

Since software always needs modification, it cannot be stressed too strongly that documentation—both manuals and source-code comments—is one of the most important factors in selecting a software package.

# Designer's casebook

# Switching converter raises linear regulator's efficiency

by Sadeddin Kulturel Istanbul, Turkey

The low ripple and fast recovery of a series-pass voltage regulator can be attained at the high efficiency of a switching regulator if both are combined. In this circuit, the performance is achieved by using the switching circuit as a preregulator for the linear element.

As shown in the illustration of the general circuit, which is designed to transform the 35-volt raw input into a well-regulated output, heat dissipation across the LM317K series element can be reduced if it is made to handle a switched, rather than a continuous, input. Here, the switching regulator is formed by transistors  $Q_1$ – $Q_4$ ,  $D_1$ , and  $L_1$ . During power up,  $Q_1$ , driven through  $R_1$ – $R_3$ ,


is brought into saturation.  $Q_2$  remains off and  $Q_3$  is turned on.

Switching occurs when  $V_d$  equals 3.6 volts, which is  $D_2$ 's zener voltage.  $Q_4$  then turns on, as does  $Q_2$ , and  $Q_3$  is turned off

As  $Q_2$  turns on,  $Q_1$  switches off, and because of the positive voltage spike created by  $L_1$ , load current is momentarily forced through  $D_1$  as  $V_d$  decreases. When  $V_d$  reaches the lower hysteresis threshold of  $Q_3$  as established by  $R_5$  and  $R_6$ ,  $Q_2$  and  $Q_4$  turn off, and  $Q_1$  turns on, completing the switching cycle. With the supply's negative path restored,  $V_d$  rises until it reaches  $V_2$ , and the process is repeated.

The linear regulator can be of any type, including a three-terminal, nonadjustable device. Note that a switching current regulator can be formed if the regulator is replaced by a resistor. In that case, the switching current will be  $I_S = V_Z/R$ .

Designer's casebook is a regular feature in *Electronics*. We invite readers to submit original and unpublished circuit ideas and solutions to design problems. Explain briefly but thoroughly the circuit's operating principle and purpose. We'll pay \$50 for each item published.

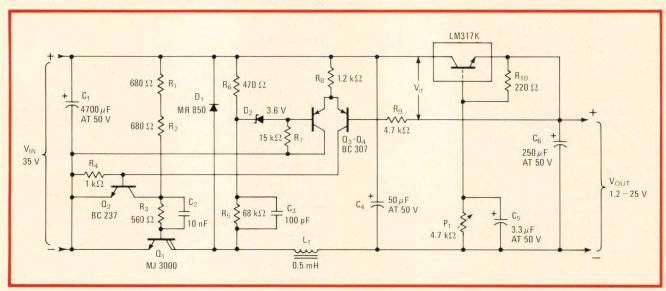

**Mixed mode.** Switched and linear regulators are combined to form a unit that has the advantages of both—low ripple, fast response, and high efficiency. Here a switched circuit serves as a preregulator for the linear series-pass element, the LM317K.

# LSI counter simplifies display for a-m/fm radio


by Gary McClellan

Beckman Instruments Inc., Fullerton, Calif.

The design of a display providing a direct readout of any frequency tuned by an a-m/fm radio is made simple with

this circuit, which uses a large-scale integrated counterdriver to determine the frequency of the receiver's local oscillator. The counter is unique in that it contains circuitry that subtracts the receiver's intermediate frequency from the local oscillator frequency in order that the true channel frequency may be found. The combination of this counter, a one-chip prescaler, and a 3½-digit liquid-crystal display makes for a compact and relatively low-cost unit.

The circuit is housed in two separate modules, one containing the preamplifier, prescaler, and logic, and the

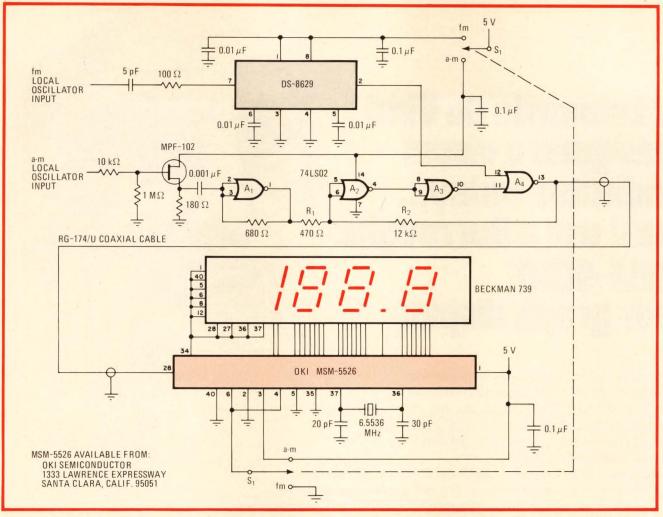

I-f compensation. MSI and LSI chips reduce cost and complexity of display for a-m/fm radio. MSM-5526 counter has circuitry for subtracting receiver's i-f frequency (see table) from radio's local oscillator input so that the true channel frequency may be displayed.

other the counter and LCD components. In this way, the first module can be mounted on the receiver's radio frequency assembly (keeping unwanted pickup to a minimum), and the other may be placed at any convenient spot for viewing.

In the a-m mode, signals are applied to the MPF-102 field-effect transistor. The input impedance of this stage is high, and consequently loading of the local oscillator is minimal. A<sub>1</sub> operates in its linear region and thus serves to amplify the local oscillator signal.

Schmitt trigger  $A_2$ – $A_4$  squares up the signal to transistor-transistor-logic levels, then applies it to the MSM-5526 counter.  $R_1$  and  $R_2$  set the hysteresis of the trigger.

The MSM-5526 contains a read-only memory that may be programmed with any i-f value (see table). Also contained is the subtraction circuitry discussed previously, and the necessary decoders/drivers for presenting the 3½-digit Beckman LCD with the difference frequency in kilohertz. Generally, the local oscillator will always lie above the incoming frequency in the modern a-m receiver, as reflected in the table. The same condition holds true most of the time in fm receivers, but there is a provision for achieving a positive offset if one of the older receivers is being used. Note that if all programmable pins are set at logic 0, an i-f of 455 kHz for a-m

MSM-5526 INTERMEDIATE-FREQUENCY OFFSET				
Input-pin state				Offset (a-m in kHz, fm in MHz)
2	3	4	5	
Н	Н	Н	X	-452.5
L	Н	Н	X	-454.5
Н	L	Н	X	-456.5
L	L	Н	X	-465.5
Н	Н	L	X	-467.5
L	Н	L	×	-469.5
н	н	Н	Н	10.68
L	H	Н	Н	10.71
Н	L	Н	Н	10.75
L	L	Н	Н	10.79
Н	Н	L	Н	10.82
L	Н	L	Н	-10.58
Н	L	L	Н	-10.60
L	L	L	Н	-10.61
Н	Н	Н	L	-10.62
	Н	Н		-10.63
	L	Н	L	-10.65
L	L	Н	L	-10.66
Н	Н	L	L	-10.69
L	Н	L		-10.70
		L	L	-10.72
L	L	ī	L	-10.73
	2 H L H L H L H L H L H L H L H L	Input-pi	Input-pin state   2   3   4	Input-pin state

If Leonardo da Vinci designed a visual indicator today... he'd use a Burroughs SELF-SCAN® bar graph display

Leonardo da Vinci would have considered
Burroughs SELF-SCAN bar graph displays a
designer's dream. These compact, flat panel, gas
plasma indicators present instant analog displays
with digital accuracy. They're bright and easy-to-read,
even in high ambient light.


Hundreds of thousands of SELF-SCAN bar graph displays are currently in use worldwide for process control systems and instrumentation, automotive and aircraft displays, panel meters, and many other diverse applications.

Versatile SELF-SCAN bar graphs can be custom-designed into practically any configuration. Standard models include dual linear displays with 1/2% or 1% scales, a dual reset display for measuring values against preset ranges, and a 120 element circular display.

You'll also appreciate their low cost drive circuitry and low power consumption. And with no moving parts, these rugged, reliable bar graphs are ideal for use in equipment subject to shock and vibration.

It's time you designed Burroughs SELF-SCAN bar graph displays into your equipment. Send for specifications today. **Burroughs OEM Division,** P.O. Box 1226, Plainfield, NJ 07061, (201) 757-5000.

In Europe, contact Burroughs OEM Division, Langwood House, High Street, Rickmansworth Hertfordshire, England. Telephone Rickmansworth-70545. Also in stock at your local Hamilton/Avnet branch.

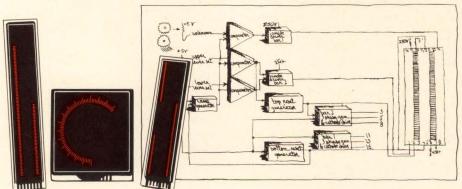

and 10.7 MHz for fm will be subtracted.

In the fm mode, the receiver's local oscillator is applied to the DS-8629 prescaler. This prescaler has high sensitivity, and the local oscillator need only be capable of supplying a minimum of 12 mV at 100 MHz.

The DS-8629 divides the incoming frequency by 100. Then the signal is gated through to the counter via A<sub>4</sub>. In this configuration, an i-f equal to ½100 the fm receiver's nominal value (10.7 MHz) is subtracted from the input frequency to the counter, and the result is displayed in megahertz.

A number of practical considerations must be taken into account when building this display. Specifically, the presence of the prescaler will introduce a typical shift of 500 Hz in the read-out frequency. The error may be eliminated entirely by simple adjustment of the 30-picofarad air-variable trimming capacitor, located at pin 36 of the counter.

The first module should be shielded from the receiver's tuner if noise in the fm mode is to be held to a minimum. Housing the module in an aluminum enclosure will suffice in most cases. And although the liquid-crystal display will tend to generate less noise than many light-emitting-diode displays now available, shielding it may also be necessary in extreme cases.

Both modules should be coupled via a coaxial cable. Otherwise a broadband hiss may be heard when the unit is placed in the a-m mode.

# Balanced modulator chip multiplies three signals

by Henrique Sarmento Malvar Department of Electrical Engineering, University of Brazilia, Brazil

Three signals can be multiplied by a one-chip double-balanced modulator, a device normally capable of mixing only two. In this case, the third input is introduced at the bias port of Fairchild's  $\mu$ A796, enabling the unit's transconductance to be varied at an audio rate, which effects modulation. Although the technique reduces the bandwidth and dynamic range over which the device can operate, the three-input mixer will still be useful in many applications, notably for generating discrete sidebands and synthesizing music.

The output voltage from the mixer,  $V_o$ , is the product of a carrier switching function,  $V_c$ , and a modulated signal,  $V_s$ . Because the bias signal,  $V_b$ , controls the conductivity of transistors that are effectively in series with the usual modulating signal, it is simply regarded as


a second modulating signal such that  $V_o = kV_bV_cV_s$ , where  $k = 0.00064R_L/R_I$  over a small dynamic range and the voltages are in millivolts.

Note that  $V_c$  and  $V_s$  may be positive or negative but that  $V_b$  must always be positive to prevent the reverse-biasing of the internal transistors connected to pin 5. When  $V_b$  is negative,  $A_1$  blocks the application of negative voltage by turning off the BC 178 transistor.


Note also that k will vary nonlinearly with the amplitude of  $V_c$  and  $V_s$ , and in order to keep k within 1% of its given value, both voltages must not exceed 8 millivolts root mean square.  $V_b$  will not affect k if  $I_{bias} < < 1$  milliampere. Unfortunately, k also is sensitive to temperature changes  $(-0.67\%/^{\circ}C)$ , and this factor can limit the circuit's effectiveness in high-accuracy applications.

The output frequencies generated by the mixing process will be  $|f_c \pm f_s|$ , and  $|f_c \pm f_s \pm f_b|$ , where the f subscripts correspond to their voltage counterparts. There will be no output if any of the driving signals are disconnected.

Signal inputs  $V_c$  and  $V_s$  may have an  $f_c$  or  $f_s$  of one megahertz at the maximum. The third input,  $V_b$ , will be band-limited to 20 kilohertz, however, because of the relatively poor frequency response of the 741.

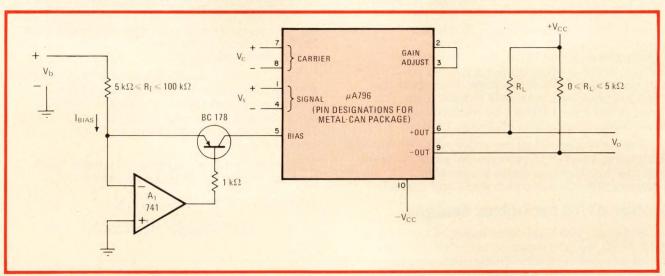

**Biased mixer.** A balanced modulator can be configured to multiply three signals by introducing the third signal to the bias port. The bias current, which normally sets the dc operating point of device, is varied at an audio rate to effect linear modulation over a small dynamic range.

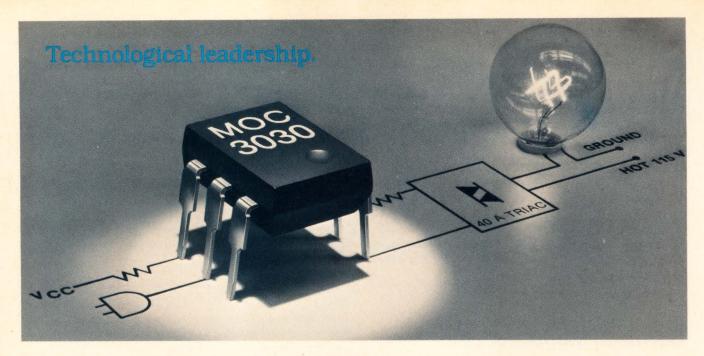

# Quietly, without noise, zero-crossing opto coupler drives AC power control out of the dark ages.

For years, designers have searched for the ideal Triac driver . . . simple, economical, flexible and highly resistant to that barbarous medieval bugaboo-EMI.

Now it's here: the MOC3030, a single-chip bidirectional, optical coupler with full zerocrossing capability and the answer to your AC power control prayers.

# Make it simple with zero-crossing

Elimination of electromagnetic interference generated by high inrush currents when Triacs are triggered at near-peak AC voltages is highly desirable where you're designing around sensitive and expensive loads. In the MOC3030 it's done with a pair of on-chip, N-channel enhancement-mode FETs. Whenever applied voltage to the coupler becomes greater than FET threshold, the FETs so decrease Triac gain that the LED photons are unable to turn it on. The Triac driver can therefore be triggered only when line voltage is less than FET V<sub>GS</sub>, typically 20 V.

The FETs also act as an active snubber network, banishing a passel of passives. No extra parts, no external hookups, no forest primeval of componentry. Connect four leads and that's it.

# Better dv/dt for better designs

Superior, 100 V/ $\mu$ s dv/dt is one of the keys to MOC3030 top performance, achieved through ion-implanted resistors. These raise coupler breakdown voltage to 250 V, further reducing

sensitivity to false turn-on and EMI and enabling it to drive highly inductive loads whose size is dependent only on Triac capability. Nothing happens in a MOC3030-designed circuit unless you design it in.

# Applications unlimited

The most natural use of the '3030 is interfacing logic/MPU to peripheral equipment directly from AC lines . . . CRTs, teleprinters, incandescents, etc. But its simplicity, adaptability and 1,000-up, \$1.45 price makes a whole new ballgame possible in traffic light controls, SSRs, electronic scoreboards, home appliances, TV remotes and industrial control and lighting. And you can use it as a plug-in upgrade for existing MOC3011 designs. Naturally, it's tested to 7,500 V peak, a Motorola SOP.

For new data sheets on the MOC3030 and the MAC223 25 A plastic Triac series, another volume-produced Motorola exclusive, write Motorola Semiconductor Products Inc., P.O. Box 20912, Phoenix, AZ 85036, or circle the reader service number.

Together with an MPU or TTL logic, you'll have an unbeatable leadership combo for

Innovative systems through silicon.



# Design and process innovation converge in 1-GHz oscilloscope

Getting the bandwidth to display subnanosecond events without sampling called for unique circuits, connectors, and semiconductor processes


by John Addis, Tektronix Inc., Beaverton, Ore.

Extremely high-frequency linear integrated circuits, made with a special monolithic process, packaged as thin-film hybrid devices, and interconnected with a novel high-frequency connection system, are some results of unique design techniques that have made it possible to build the world's first conventional (nonsampling) 1-gigahertz oscilloscope. As a result, the Tektronix 7104 system has a sensitivity of 10 millivolts per division, an input impedance of 50 ohms, and a maximum sweep speed of 200 picoseconds per division.

# State-of-the-art designs


To achieve the required performance, the 7104 uses three different passive and seven different active hybrids—all state-of-the-art designs. For instance, one single-stage hybrid amplifier (used nine times) has a gain/bandwidth product greater than 12 GHz. The hybrids are connected to printed-circuit boards with a novel, elastomeric high-frequency connector system that allows individual hybrids to be removed and replaced quickly with only a screwdriver.

These innovations solve the problems that Tektronix engineers faced at the start of the project. Perhaps the most obvious lack they had to confront was the fact that none of the then-existing hybrid circuit packages for individual amplifier stages would be suitable at 1 GHz. The commonly used package seen at the left in Fig. 1 is barely adequate for amplifiers with half the bandwidth of the 7104, such as the vertical amplifier of the Tektronix 7904, an earlier 500-megahertz scope.

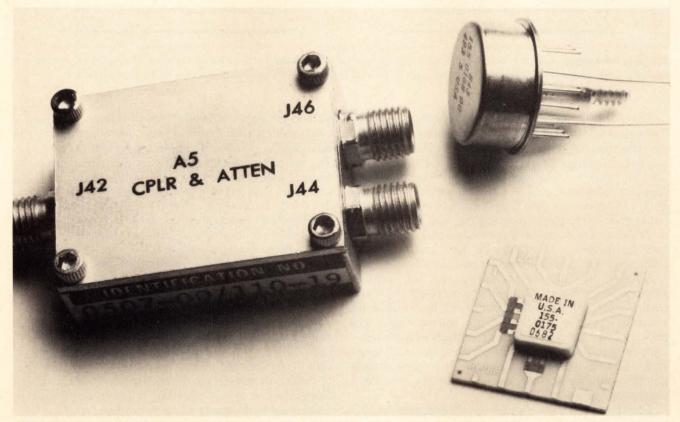

**1. Hybrid packages.** At the left is an aluminum box typical of those used in spectrum analyzers and other microwave systems. Upper right is a package typical of those used in the 7904 500-MHz oscilloscope. Below is a new hybrid package basic to the 7104 1-GHz scope.

Electronics/June 21, 1979

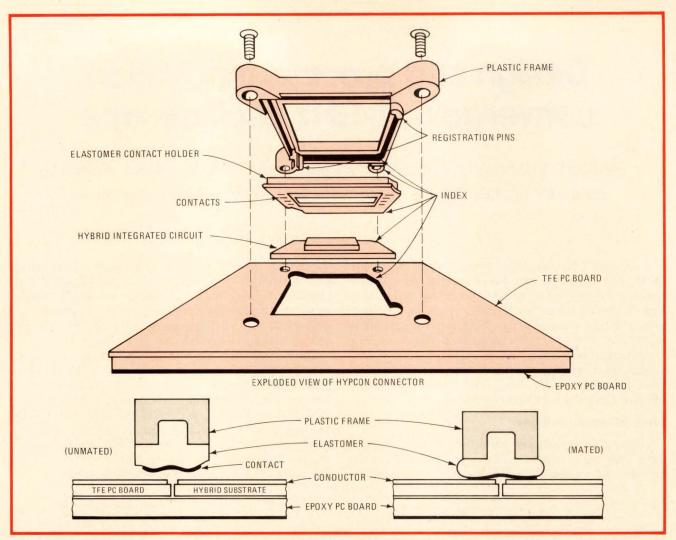

**2. Hybrid connection.** A Hypcon consists of a glass-impregnated plastic frame that holds a silicone elastomer onto which are bonded gold contacts. These contacts touch both the hybrid package and the printed-circuit conductors without adding appreciable reactance.

The 1-GHz amplifier requires a rise time of 140 ps. Tests showed that existing sockets produced unacceptable reflections on the transmission lines needed to interconnect amplifiers at this frequency. Other packages used in spectrum analyzers and microwave amplifiers required expensive coaxial-cable connectors. Yet the ability to replace a single high-frequency amplifier without breaking wire bonds or struggling with high-frequency connectors was essential for design ease, calibration, and serviceability. Therefore, a new interconnection technology was needed, as well as new amplifiers.


Another difficulty was achieving the flat transient response so necessary to making a precisely calibrated oscilloscope. The multiple adjustments by which a flat transient response is achieved are usually made with networks connected between the emitters of a common-emitter pair. But in a 1-GHz oscilloscope, lead length from these emitters to a network of six or eight potentiometers would be too long, so an entirely new compensation technique was called for.

The third, and most fundamental, difficulty was the need for a great deal of high-frequency current gain. Advances in the cathode-ray tube employed in the 7104,


such as the image intensifier (micro-channel plate) and a new meshless scan expansion lens, were instrumental in boosting the tube's vertical voltage-deflection sensitivity. The radically new CRT used in this instrument achieves a vertical deflection factor of only 0.9 volt per division, compared with 3.0 v/div for the 7904. So at first glance, doubling bandwidth appears easy. However, the increased CRT bandwidth necessitated lowering the vertical deflection structure impedance from 365 to 200 ohms. Also, it was considered desirable to back-terminate (impedance-match) the amplifier driving the CRT to eliminate the effects of signal reflections from imperfections in the CRTs vertical-deflection structure.

With the back termination, which the 7904 does not have, and the lower impedance, the current gain is actually required to be 10% higher in the 7104 than in the 500-MHz 7904. This current gain requirement in turn determines the necessary transition frequency  $(F_T)$  of the transistors. To get the needed current gain at high frequencies, it proved necessary to advance existing IC technology by designing a new IC process.

The complete vertical system includes a plug-in amplifier, the 7A29, that provides about 40% of the amplifica-

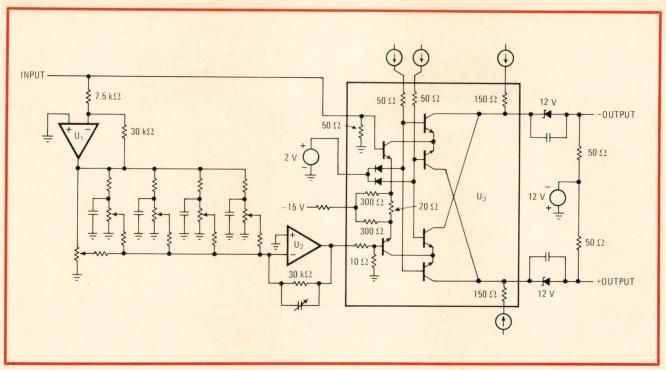

**3. Feedbeside.** In this technique, low-frequency signals are amplified by operational amplifier  $U_1$ . Different amounts of this signal are selected by five pots and filtered; this voltage is then amplified by  $U_2$  and subtracted from the wideband input by  $U_3$ .

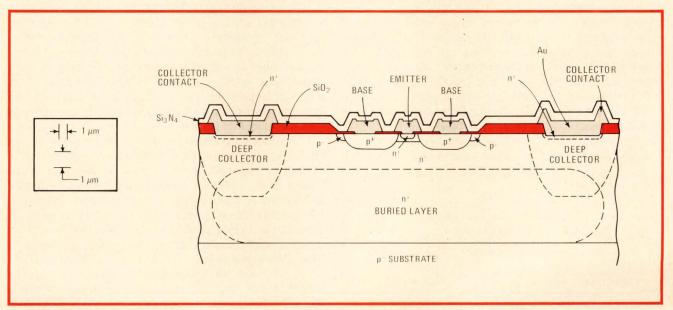

**4. SHFIII Geometry.** Tektronix SHFIII process, characterized by transistors with a 6.5-GHz transition frequency, produces some of the fastest ICs in production. A 2:1 step-and-repeat aligner projection-prints emitter widths of only 1.7 micrometers.


tion necessary to achieve 10-mV-per-division sensitivity. The 7A29 needs a back termination not used in the 7904 system. Overall, therefore, the 7104 system with its 7A29 plug-in vertical amplifier has 2.2 times the current gain of the 7904 system and twice the bandwidth—that is, 4.4 times the gain-bandwidth product.

#### The connection

Packaging was among the first of the difficulties noted. A typical amplifier stage needed one or more monolithic integrated circuits, conductors, lasertrimmed resistors, and a few small capacitors. The substrate of a thin-film hybrid circuit, to which ICs, nichrome resistors, and conductors can be attached or deposited, makes an ideal package.

Although sapphire is the substrate material commonly used at microwave frequencies, it is both fragile and far more expensive than alumina. Conductors can be easily controlled on alumina to within 25 micrometers (0.001 inch), so that 50-ohm transmission lines can carry signals from the substrate edge to the desired location near the integrated circuit.


Thin-film nichrome resistors require a very smooth substrate material, and tests indicate that high-grade

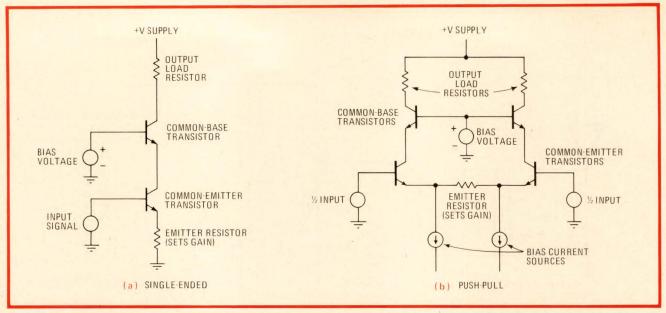

**5. Cascode connection.** Conventional transistor cascode (a) uses a common-emitter transistor driving a common-base transistor. The push-pull cascode (b) has greater immunity to supply variations when dc coupling is required and always has a zero inductance ground.

alumina with a surface finish of 0.05 micrometer (2 microinches) is as good as sapphire. It is less than one tenth as costly as sapphire, and this saving is magnified by another advantage. Alumina is available in large enough sheets to allow the 16 circuit-sized substrates (1.75 centimeters on a side) to be processed simultaneously before being laser-scribed and separated. Two hybrids that require increased power dissipation are fabricated on beryllium oxide in exactly the same fashion. In this way the complete hybrid package became composed of an alumina or beryllium oxide substrate and a protective cover (Fig. 1, bottom right), but that left the problem of interconnecting the hybrids.

Conventional high-frequency packaging puts each



**6. Doubling up.** The  $F_T$ -doubler cascode improves on the standard cascode by replacing the common-emitter pair with the  $F_T$  doubler. At  $F_T$ , where beta is unity,  $Q_2$  and  $Q_3$  add their collector currents to that of  $Q_1$  and  $Q_4$  for a total beta of 2, hence the name  $F_T$  doubler.

substrate in a separate machined aluminum box that acts as a combined shield and cover (Fig. 1, top left and right). External high-frequency signal connections are usually made through subminiature A series connectors to semirigid coaxial cable. However, SMA connectors are both extremely expensive and labor-intensive. Furthermore, the transition from planar to coaxial transmission lines is virtually impossible to make without introducing some signal-reflecting discontinuity. A means of connecting planar circuit-board transmission lines (microstrip) to the hybrid's microstrip transmission lines was evidently needed.

The hybrid-to-pc-board connector (Hypcon) shown in Fig. 2 consists of a glass-impregnated plastic frame holding a silicone elastomer that has small gold contacts bonded to it. The gold contacts touch both the hybrid and the circuit board conductors without adding appreciable inductance or capacitance. The reflected discontinuity at the hybrid edge is almost invisible to a 5-GHz time-domain reflectometer and is perhaps an order of magnitude better than an SMA-to-planar transition.

For the cost of a few plastic parts, the Hypcon connector not only makes all high-frequency contacts (typically four) but also all power-supply and control connections. When power dissipation is high, an excellent heat sink is obtained by placing a solid aluminum pedestal between the hybrid and chassis. Yet, with the Hypcon, it takes only minutes to remove and replace any hybrid. With a package and interconnection method decided on, it was now possible to concentrate on circuitry and device problems.

# Feedbeside and flatness

A new circuit technique called feedbeside was invented to overcome the difficulty of adjusting the trace for a flat transient response. After very high-frequency effects (reflections), the second most serious source of transient response problems is the inherent thermal sensitivity of the transistor base-emitter junction.

# The shortest moments on screen today

Only a few instruments at present are capable of displaying single electrical events at high frequencies. Sampling oscilloscopes have high sensitivity (2 millivolts per division is typical) but by their very nature are incapable of displaying single events. Direct-access oscilloscopes provide high bandwidth by applying signals directly to the deflection plates of the cathode-ray tube. They can therefore display single events but usually suffer from poor sensitivity.

Scan converters also display single events. They use a CRT with an electronic target such as an array of diodes or charge-coupled devices instead of a phosphor for readout. By some means, such as a second electron beam, the target is scanned at a slower rate to retrieve the recorded high-speed information.

In order of decreasing bandwidth these are the fastest instruments capable of observing single electrical events:

- Thomson-CSF of France makes a 4-gigahertz directaccess oscilloscope, the TSN 660, which has a microchannel-plate CRT. Sensitivity is 0.4 volt per division and sweep speed is 70 picoseconds per division.
- Ray Smith and his colleagues at the Lockheed Palo Alto Research Laboratories have modified a Tektronix R7912 scan converter for direct access using a small portion of the diode array target. The LM7912A achieves a sensitivity of 8.2 V full scale with 12-bit resolution and 3.5-GHz bandwidth. The diode array is capable of writing single events at full bandwidth. The instrument is at present available on a prototype basis from LPARL.
- Los Alamos Scientific Laboratories has built a 2.5-GHz direct-access oscilloscope with a slightly modified version of the CRT used in the Tektronix 7104. Sensitivity of this custom-made instrument is about 0.7 V/div.
- B&H Electronics Co. of Chester, N. Y., also modifies the Tektronix R7912 scan converter. Using discrete 15-GHz

transistors, B&H has built its own amplifiers for the R7912. The M1000 is essentially hand-built but achieves 1-mV/div sensitivity and 1-GHz bandwidth. The unit has poorer transient response than most oscilloscopes but does have low noise. Since it, too, uses the R7912 diode array target, the writing rate is very high. The cost is about \$32,000, including the R7912.

- The Soviets make a 1.2-GHz direct-access oscilloscope with 1-volt-per-cm sensitivity. The C7-10A is not available in the U. S. and is rare even in the USSR.
- The Tektronix 7104 system described in the accompanying article has 1-GHz bandwidth and 10-mV/div sensitivity. It costs about \$21,400 with a full complement of plug-ins. Also from Tektronix are the R7912 and 7904, which both can have a 1-GHz or 500-MHz bandwidth when equipped with the appropriate plug-in. Sensitivity is about 4 V/div in the 1-GHz case, 10 mV/div otherwise. The cost is between \$9,000 and \$26,000. The fastest portable oscilloscope is the 21-lb Tektronix 485 with 350-MHz bandwidth and 5-mV/div sensitivity. Input impedance is switchable between 50 ohms and 1 megohm (with 250-MHz bandwidth). The 485 is priced in the region of \$5,700.
- The French company Schlumberger Ltd. markets the 5246, a portable 33-lb, 300-MHz oscilioscope with 50-ohm input impedance and 10-mV/div sensitivity. The 5246 costs about \$7,900 in the U. S.
- Hewlett-Packard Co., Palo Alto, Calif., makes a 275-MHz portable oscilloscope with a switchable input impedance of 50 ohms to 1 megohm. Cost of the 1725A is approximately \$3,500.
- The author has also seen a 250-MHz Soviet oscilloscope, the C1-75, which has a sensitivity of 10 mV/div and a 50-ohm input impedance, weighs 51 lb, and is apparently not available in the U. S.

A signal current change in a transistor also changes its power dissipation, which in turn causes a temperature change that alters the transistor's base-emitter junction voltage. Unfortunately, the base-emitter junction voltage is in series with the input signal of a common-emitter amplifier, and as the transistor does not distinguish between the real signal input and the thermally generated one, the result is usually an up-to-8% increase in the low-frequency gain. This is unacceptable in an amplifier used in an oscilloscope, where calibration must be accurate over a broad range of frequencies to better than 1%.

Discrete transistor amplifiers show thermal effects from below 1 hertz to approximately 1 MHz unless they use thermal balancing. With this technique, two resistors are added to bias discrete transistors in pairs so as to cancel the thermal effects. However, the high-frequency response is destroyed by these added resistors unless they are bypassed with a capacitor—a capacitor so large that it makes thermal balancing an inappropriate technique for very wideband monolithic amplifiers.

Fortunately, because of their close thermal coupling, monolithic amplifiers suffer much less than discrete versions from thermal effects, rarely showing them below 100 Hz. Their close thermal coupling is the basis for the traditional solution for monolithic amplifiers—


namely, to connect six to eight RC networks between the emitters of a common-emitter pair and to select or adjust these networks in order to bring the high-frequency gain up to match the dc gain. All of the compensation circuitry for a multistage amplifier may be put in one stage, if desired, and the results can be quite good. Even a multistage amplifier that has an accumulated thermal error of 10% can be made flat to within approximately 0.5% with five networks.

#### **Another obstacle**

One limitation of this traditional solution is the need to boost the gain at all high frequencies to match the dc gain. At some high frequencies it becomes impossible to get the RC networks close enough to the transistor emitters to avoid the effects of lead inductance. The problem is barely manageable with the TO-8 packages in the 500-MHz 7904. For the 1-GHz 7104, a whole new approach was needed.

It was decided to decrease low-frequency gain until it matched high-frequency gain. The advantage of this is that only a low-frequency correction signal is required. And a low-frequency signal may be easily processed with operational amplifiers and high-impedance circuitry.

In this method the input signal is sensed and filtered in

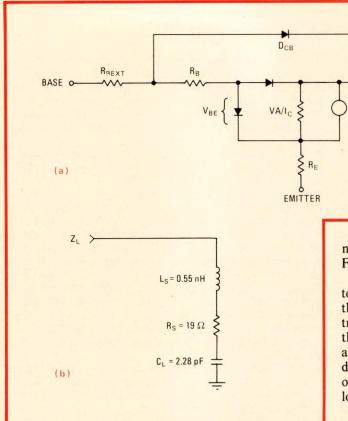

**7. Modeled.** When the extended bipolar junction transistor model for a typical SHFIII transistor (a) and appropriate parasitic impedances are combined in an F<sub>T</sub>-doubler cascode, the simple three-element input impedance model (b) is accurate up to 5 GHz.

a circuit that is separate from the main (broadband) signal path. The filtered voltage becomes a correction signal that is subtracted from the broadband signal so that it will provide a flat transient response.

Because it is neither feedback nor feedforward, this technique came to be called feedbeside. Figure 3 shows one implementation of feedbeside, the 7A29 input stage. Here, the input signal is amplified and then filtered with several adjustable RC networks (lower left); the resulting low-frequency signal is amplified again and then subtracted from the input signal within the hybrid.

Even with feedbeside, the major problem of creating a family of ICs with a large amount of current gain from dc to beyond 1 GHz remained.

# Getting up to speed

This particular problem required more work than any other. The solution was to design a reproducible IC process with the highest transition frequency, F<sub>T</sub>, possible, model the process, and design the hybrids. Accordingly, Tektronix developed a new high-frequency linear IC process called Super High Frequency III (SHFIII) specifically for the 7104.

Despite their minimum geometry, logic ICs are actually too large, in the sense that they typically operate at voltage and current levels below that for peak  $F_T$  in order to minimize power dissipation. But devices built with a linear process such as SHFIII handle more voltage and

more current to operate at or near the peak of the  $F_T$ -versus-collector-current curve.

SUBSTRATE

O COLLECTOR

CSUB

RCEXT

D<sub>SUB</sub>

gm V<sub>BE</sub>

Higher current densities not only increase a transistor's  $F_T$  by operating it at a current near the peak  $F_T$ , but these transistors, although larger than minimum geometry devices, are not bigger than they have to be and, therefore, have relatively less collector-base capacitance and less base resistance. To handle the high current densities, the epitaxial resistivity is dropped to 0.25 ohm-cm from the more typical 0.5 to 1.0 ohm-cm for logic processes.

High current densities and small geometries require a metal system resistant to electromigration—that is, the movement of individual metal atoms under the influence of an electric field (flowing current), which eventually results in an open conductor. Gold was chosen for SHFIII metalization as it is highly resistant to electromigration. Unfortunately, gold dissolves in silicon, so a multilayered metal barrier is placed between the silicon and the gold. The result is an exceptionally stable and readily patterned metal system.

(To go off chip for the moment, gold bonding wires are also used, partly for their ductility and chemical inertness but additionally because use of the same metal for both the IC and bonding wires eliminates the formation of intermetallic compounds that can cause early failure. For many of the same reasons, the hybrid metal system is also best made of gold. Finally, the etched circuit boards and the Hypcon metalizations are made of gold for an electrolysis-free interconnection system, leading one wag to quip about "the all-gold oscilloscope.")

A cross section of the IC is shown in Fig. 4. Shallow, repeatable junctions are essential for intrinsically high F<sub>T</sub>, so the base and arsenic-doped emitter are both ion-implanted for superior control of doping profiles.

High-frequency gain strongly depends on keeping emitter lead inductance to a minimum; therefore, an on-chip emitter-gain-setting resistor is essential. However, a diffused resistor is not only difficult to make accurately but has an unacceptably high temperature coefficient. To keep gain stable with temperature and time, a  $10-\Omega/\text{square}$  nichrome deposition on the IC chip is used for emitter resistors. A parallel nichrome resistor on the hybrid is laser-trimmed to adjust the amplifier's gain to the correct value.

A computer generates all the masks needed for this

monolithic process, and a Canon projection aligner prints the circuit patterns with a 2:1 reduction. This yields emitter widths of only 1.7  $\mu$ m. Also, SHFIII is built on a 50-ohm-cm substrate, instead of the more usual 10-ohm-cm material, to reduce the effects of parasitic capacitances. With a 6.5-7-GHz  $F_T$ , SHFIII is one of the fastest IC processes in production and probably the fastest designed for linear applications.

But making wideband dc amplifiers successfully involves more than developing a fast IC process. It is also necessary to use the process efficiently by choosing an inherently broadband transistor configuration and an optimum peaking network. These two choices are not independent. Some broadband configurations have such ill-defined or complicated input impedances as to prevent design of an efficient peaking network.

# Hitting a new peak


As in the case of the 7904, a transistor configuration known as the F<sub>T</sub>-doubler cascode and a peaking network known as the bridged-T coil were chosen. Individually they are highly efficient; they are compatible; and, in the author's opinion, they are unbeatable in combination.

The standard cascode is simply a common-emitter stage followed by a common-base stage. It can be seen in Fig. 5 that low impedance at the emitter of the common-base stage keeps the common-emitter voltage gain low. This in turn prevents Miller multiplication of the common-emitter's collector-base capacitance. The common-base stage passes the signal current to the output and provides voltage gain with practically no high-frequency attenuation. In fact, the judicious use of base and collector lead inductance can improve bandwidth still further.

The  $F_T$ -doubler cascode is an advance on the standard cascode. In Fig. 6, the  $F_T$  doubler replaces the commonemitter pair. Essentially, it puts two common-emitter stage inputs in series while combining their outputs in parallel. Placing their inputs in series lowers the input capacitance and therefore improves bandwidth. Placing the outputs in parallel adds the collector currents of all four transistors and thus keeps the gain from being halved as a result of putting the inputs in series.

In practice, the F<sub>T</sub>-doubler cascode offers an improvement of something closer to 1.5 times, but it is still a way of getting a 10-GHz transistor pair out of a 6.5-GHz IC process. In addition to its high current gain, the F<sub>T</sub>doubler has a very simple input impedance. An SHFIII transistor model for Spice (the Berkeley computer-aided circuit design program) is shown in Fig. 7. When this model and appropriate parasitics such as bond-pad impedances and IC run inductances are put together in an F<sub>T</sub>-doubler cascode, the input impedance calculated by Spice is that shown at the top in Fig. 7. A close approximation to this impedance is provided by the simple three-element network also shown in Fig. 7. These three elements form the load for a bridged-T-coil peaking network, and once their values are known, it becomes possible to design the network for the input to the F<sub>T</sub>-doubler circuit.

The bridged-T network, shown in Fig. 8, has two advantages as a broadband peaking network. First, for



**8. Bridged-T coil.** Broadband peaking at reduced cost is provided by this bridged-T network.  $L_1$  and  $L_2$  are mutually coupled inductances and  $C_B$  is a bridging capacitor.  $L_S$ ,  $R_S$ , and  $C_L$  are the equivalent of the  $F_T$ -doubler cascode's input impedance, The voltage developed across  $C_L$  is peaked by choosing  $L_1$ ,  $L_2$ , and  $C_B$ .

the same overshoot, it provides exactly twice the bandwidth as simple series peaking. Second, it presents an input impedance that is real and equal to the load resistance, R<sub>L</sub>, at all frequencies.

The second advantage is at least as important as the first, but it may not be as obvious. If every stage has a real input impedance, then each may be located in a separate package and connected to the others with a transmission line. Because the bridged-T coil is such a good termination, the prior stage need not be back-terminated—and to back-terminate would halve precious current gain.

# Specified peaking


From the three-element input impedance, it is possible to calculate all four components (L<sub>1</sub>, L<sub>2</sub>, M, and C<sub>B</sub>) of a bridged-T coil using formulas calculated by Robert I. Ross of Tektronix in 1969. The exact amount of peaking (i. e. pole location) desired may also be specified as a fourth input variable.

Once the T-coil values had been calculated, it was still a problem to realize them. The inductances were obtained in two different ways, depending upon the particular hybrid. Wink Gross of Tektronix wrote programs to calculate the self- and mutual inductances of both multisegment bond wires and multiturn spirals. Directional coupler effects make high mutual inductances harder to obtain with straight bond wires than with spirals. However, the higher mutual inductance of multiturn spirals can be nullified in some configurations by the bond wire needed to connect the spiral to the IC.

Bridged capacitance  $C_B$  was attained with an interdigitated structure of  $25-\mu$ m-wide lines and spaces on the hybrid substrate. The multiturn spiral and the bond-wire methods are similar to the input T-coil in result.

# A high-frequency hybrid

One hybrid amplifier is used nine times in a typical 7104 system and has some features worth mentioning in detail. Figure 9 shows the schematic diagram for this versatile amplifier and a drawing of the layout. There

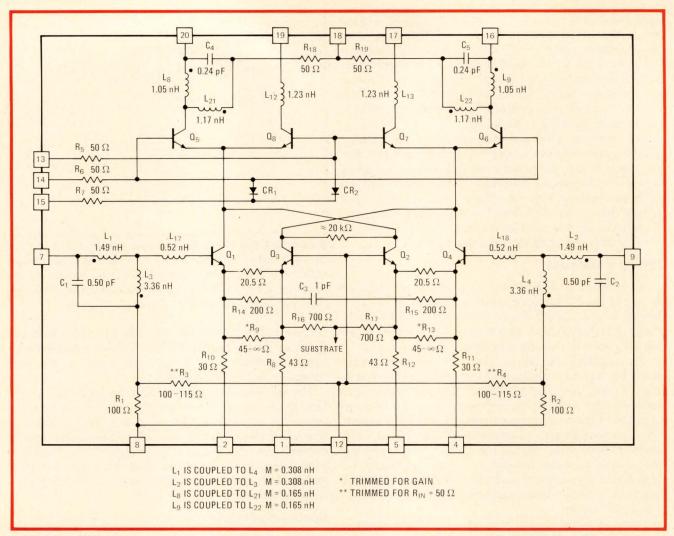

**9. Hybrid amplifier.** In a typical hybrid amplifier used on the 7104 (a), pins 7 and 9 are the inputs to the amplifier from the bridged-T coil network. The circuit has a 12.6-GHz gain-bandwidth product that is exceptional in a single-stage amplifier.

are actually three usable signal outputs (all signal processing is push/pull, so that each input and each output consists of a pair of transmission lines).

Referring to the schematic, the output from pins 17 and 19 is selected by biasing pin 13 positive with respect to pin 14. In this biasing configuration the gain into a 50-ohm (per side) load is 4.6 or 13.25 decibels. The amplifier rise time is typically 145 ps in a 70-ps measuring system with very little overshoot or ringing; this gives a calculated rise time of 127 ps and a bandwidth of 2.75 GHz. The 12.6-GHz gain-bandwidth product is exceptional for a single-stage silicon amplifier.

By way of comparison, the 7904 amplifiers attain rise times of 300 ps to 400 ps with essentially the same gain. A single-stage gallium-arsenide amplifier that was reported in the literature last year had 3.0-GHz bandwidth and a gain of 12 dB but was unable to attain that gain when operated into a 50-ohm load.

By biasing pin 14 positive with respect to pin 13, output may be obtained from pins 16 and 20. The gain from this output is only 2.3 (7.25 dB). Using a second T coil in this output gives a virtually perfect 50-ohm output impedance or back termination with only a 10-ps loss in rise time. This output is used when a clean transmission

line to the next stage cannot be relied upon (for example, to drive the plug-in-to-mainframe interface).


The third output is available at pins 2 and 4. This output has a gain of 0.5 and is not reverse-terminated very well, yet it is useful as a signal pickoff and has a bandwidth in excess of 3 GHz. Normally, pins 2 and 4 are terminated outside the hybrid in 50 ohms and then tied to a negative power supply along with pins 2 and 5.

The self-biasing scheme for the F<sub>T</sub>-doubler cascode using part of the input termination, R<sub>3</sub> and R<sub>4</sub>, makes the amplifier no harder to bias than a common emitter pair. A fourth output, the average dc common-mode input voltage, is available at pin 12. This voltage may be used to establish bias on a previous stage, but no external connection is needed at this terminal.

All control-base leads (pins 13, 14, and 15) are buffered on the hybrid with 50 ohms. This eliminates the most common source of oscillations associated with cascodes: common-mode capacitance at the common-base stage's base. Thus, even during the development program, this amplifier never oscillated.

Patents for feedbeside, the  $F_T$ -doubler circuit, and the Hypcon connector have either been granted to Tektronix or are still pending.

# Once again HP makes your money count.

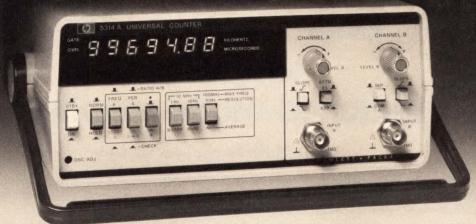

# A universal counter for \$375.

The smart money's on HP's new 5314A Universal Counter because it does so much for so little. Now, in one low-cost counter, you can measure frequency up to 100 MHz, period down to 400 nanoseconds with 100 picosecond resolution, and time interval with 100 ns resolution. Add frequency ratio, ratio averaging, totalizing and a full complement of time interval measurement controls and you've got a package you'd expect to find at almost twice the 5314A's

\$375 price. Options: internal battery and charger, \$95; TCXO time base, \$100.

Time interval measurement capabilities are truly outstanding at the 5314A's price. Instead of limited single channel controls, or none at all, the 5314A gives you both input trigger level and slope controls for two input channels. So now you can measure pulse widths or time between pulses with stop and start commands from either one or two input control lines.

# HP's frequency counters also save you time and money.

Using state-of-the-art components common to HP's most sophisticated counters, the HP5380 frequency counter series offers high accuracy, high input sensitivity, input attenuators and direct counting for rapid, convenient frequency measurement and adjustments.

5381A 80 MHz, \$295 • 5382A 225 MHz, \$395 • 5383A 520 MHz, \$650.



To find out more about HP's low-cost laboratory grade counters and the entire family of sophisticated and versatile HP counters call your nearest HP field office. Or write for the 5314A and 5380 series data sheets and electronic counter brochure.

Prices domestic U.S.A. only



1507 Page Mill Road, Palo Alto, California 94304

For assistance call: Washington (301) 258-2000, Chicago (312) 255-9800, Atlanta (404) 955-1500, Los Angeles (213) 877-1282



Circle 139 on reader service card

# One-chip controller simplifies switched-mode supplies

by Robert C. Frostholm, Signetics Corp., Sunnyvale, Calif.

Over the past few years industrial users of high-power regulators have been in search of effective energy-conversion techniques, and this has speeded the evolution from the conventional linear series-pass regulator to the more efficient switching regulator. But work to improve the switching regulator has so far been slowed by the inability of existing technology to integrate the necessary additional housekeeping—or control—and protection circuits on one chip. Recent developments have added to the switcher's other advantages, however, and it will be smaller, lighter, still more efficient, and less expensive now that one-chip controllers like the Signetics NE5560 discussed here are available.

Series and shunt-pass, or linear, regulators using integrated circuits have been available for almost a decade. In both types, a dc output voltage is sensed and then compared to an internal reference. The resulting error voltage is amplified and used to control the internal

(+) NE5560 (+) V<sub>IN</sub> (+) V<sub>O</sub> (-) (b)


resistance of the active-pass element, thus keeping the output voltage constant despite changes in line voltage and load current.


The major disadvantage of the linear regulator is that large amounts of energy are wasted. This is caused by the high currents that flow through the series resistance of the active device and the series-sensing resistance. The energy is radiated as heat, so the pass element often requires expensive heat sinks.

# Cooler approach

The switching-mode type of regulator, on the other hand, is a dc-dc converter that operates at a high efficiency. The input dc voltage is applied to a chopper that generally works at 20 kilohertz or above, to minimize the size of the circuit's inductive elements. The chopped dc is then transformed into a higher or lower voltage, whichever is required, and rectified and filtered with the aid of the regulator's control circuitry. The controller senses the output voltage and, to keep it constant, adjusts the duty cycle of the chopper's switching transistor as needed. But the primary disadvantage of the switching converter is that it requires a greater

1. Switching family. Switching regulators may be of the forward (a) or flyback (b) type, or logical extensions of them. All may be driven by the NE5560 one-chip controller. A design guide (c) sets general voltage-power limits within which each converter is most efficient and that are therefore recommended.

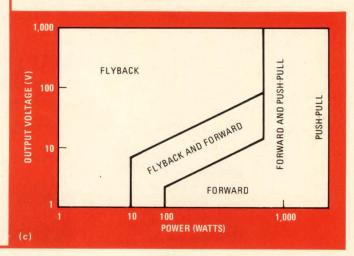

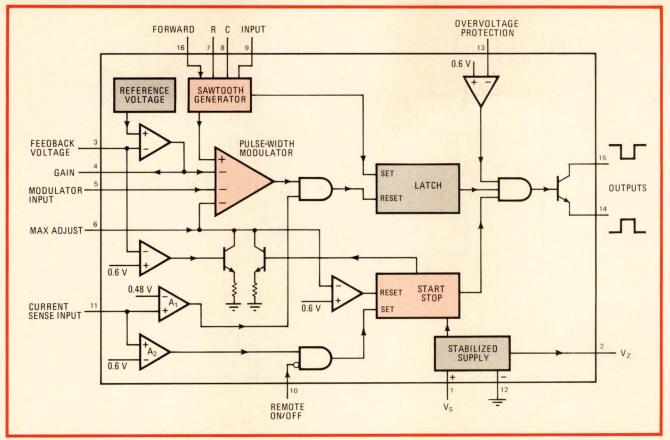

**2. Squeezing functions.** NE5560 controller provides regulator's switching transistor with frequency-stable output signal having adjustable duty cycle. Maximum duty cycle is programmable. Also included are overload protection, automatic startup after cause for overload is removed, and microprocessor-compatible port for sequential or individual startup of supplies in multiple-output arrangement.

number of components than its linear counterpart does.

The NE5560 is designed to drive the switching transistor in either of the two basic switching configurations—the forward (series) converter or the flyback (parallel) converter. In both types (Fig. 1), a choke is used for energy storage.

## Flyback and forward

In the forward converter (a), the choke is connected in series with the load. Thus energy is transferred to the load and coil while the chopper is on. In the flyback converter (b), the coil is connected in parallel with the load. Energy is stored in the coil during the chopper's on period and transferred to the load during its off period.

The advantages of the forward converter include switching that is limited to the on period, a peak collector-emitter voltage (V<sub>cc</sub>) that can be no greater than the dc input voltage, a smaller choke than its flyback counterpart, and a smaller output ripple current. The disadvantages include difficulty in achieving isolation and the possibility that full input voltage may appear across the load if a switching transistor shorts. A selection guide outlining the general limits within which each is most efficient is shown in (c) for both types of converters and their offshoots.

The output stage of the NE5560 monolithic controller (Fig. 2) provides a minimum current of 40 milliamperes for driving the switching transistor of either type of regulator. Not only does the controller deliver a frequen-


cy-stable output signal at an adjustable duty cycle, it also prevents overloading, initiates automatic starting when the fault causing the overload is removed, and can be controlled remotely.

The unit's sawtooth oscillator is programmed by a single RC network. The oscillator can be varied over 50 hertz to 100 kilohertz at a duty cycle of 0 to 98%.

During normal operation, the output of the generator (of which the oscillator is one part) and a pulse-width modulator set and reset the output latch, respectively. Thus the duration of the pulse appearing at the output of the single-ended, open-collector stage at pins 14 and 15 may be controlled by applying suitable driving signals to the modulator. An external synchronization port, pin 9, will override the setting of the latch, if desired. Under these conditions, the synchronizing frequency must be lower than the free-running frequency of the sawtooth generator.

# Limiting pulse width

A duty cycle of 50% is considered the maximum for switchers operating in the forward-converter configuration, and provision has been made to limit it as desired. The adjusting port (pin 6), in conjunction with the  $V_z$  output of the controller, can be used to set the maximum. Note that the modulation input (pin 5) to the pulse-width modulator affects the duty cycle in much the same way, although it has no influence on the operation of the start/stop fault circuits. Different stages in the

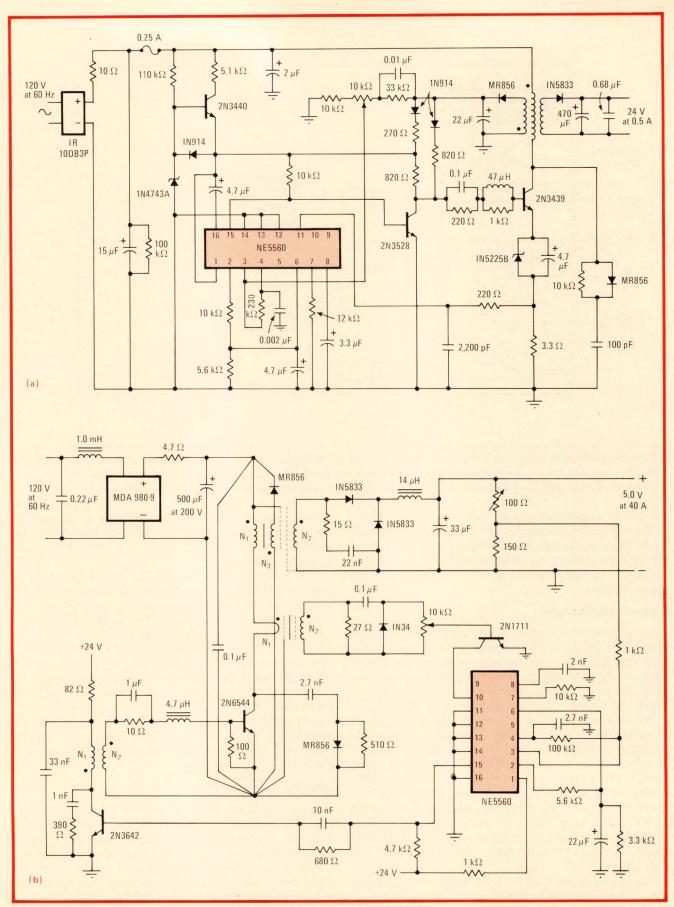

**3. Implementation.** In typical applications, NE5560 serves as controller for low-power flyback converter (a) or high-power forward converter (b). The size, cost, and number of interconnections in these already complex units are drastically reduced by the one-chip controller.

#### Small but competitive controller market grows

Switched-mode controllers have been available since late 1976, when Silicon General released the SG1524, and many companies now vie for a share of the market. Exar, Fairchild, Hitachi, National, Signetics, and Texas Instruments manufacture pin-compatible equivalents of the device, now called the 3524. Silicon General has two improved versions (3525 and 3526), both of which have soft-start and adjustable dead-time capability. Motorola's 3520 (no relation to SG's 3524), introduced in 1977, has no error amplifier on chip and the emitters of its output transistors are inaccessible. This limits the circuit configurations to which it may be applied, but the duty cycle can

be varied over the entire 0–100% range. TI's competitive entry, the 494, is also available, and has many of the features of the controllers previously discussed. This controller is second-sourced by Motorola. Motorola also makes the 3521, which is equivalent to the 494. Ferranti (ZN1066) and Plessey (SL442) are also in the field.

The availability of an adjustable oscillator and an internal voltage reference are standard controller features, but other items—such as on-chip protection against double-pulsing of a given output during transient conditions—vary from device to device (see table of the more popular controllers).

-Vincent Biancomano

SWITCHED MODE CONTROLLER CHARACTERISTICS									
	Output configuration	Accessible emitter and collector output leads	On-chip error op amp	On-chip overvoltage or overcurrent sense op amps	Double- pulse protection	On-chip soft-start stage	Inhibit/ slaving	Current- limited output stage	Dead-time adjustment range
494	push-pull	yes	yes	yes	yes	no	yes	no	0-45% each output
3520	push-pull	collectors only	no	no	yes	no	yes	no	0-50% each output
3524	push-pull	yes	yes	yes	no	no	yes	no	not available
5560	single-ended	yes	yes	yes	no	yes	yes	yes	0-98%

NE5560 provide compensation for variations that occur in the line voltage, provide protection from overload, and generate a startup sequence as soon as the overload condition has been removed.

The feed-forward port (pin 16) is instrumental in minimizing output variations due to changes in line voltage. If a control voltage applied to pin 16 should exceed  $V_z$ , the charging current for the timing capacitor on pin 8 is increases. The larger the voltage on pin 16, the larger the charging current and consequently the shorter the duty cycle. Thus the output voltage tends to remain constant.

#### Sensitive

A pair of comparators,  $A_1$  and  $A_2$ , monitors the output current with an external sensing resistor. When the voltage on pin 11 exceeds 480 millivolts, the pulse-width modulator circuit shuts down, reducing the duty cycle for one period. If the condition persists, the process is repeated. However, as the duty cycle becomes smaller, the storage time of the regulator's power transistor becomes a factor; consequently, the current may increase until the voltage at pin 11 exceeds 600 mV.  $A_2$  then comes into play and completely shuts off the pulse modulator via the start/stop circuit.

The start/stop circuit initiates a soft-start action when the fault condition is corrected to bring the circuit back up gradually. When the 600-millivolt comparator,  $A_2$ , toggles, an external capacitor normally connected to pin 6 discharges through an internal  $100-\Omega$  resistor. As the voltage on pin 6 drops to 600 mV, the stop circuit resets, allowing the soft-start action to begin.

During soft start, the external capacitor begins to charge to V<sub>z</sub> via a resistor divider normally connected to

pin 2. As the capacitor charges, the voltage on pin 6 increases. This increase is detected by the pulse-width modulator, which begins to provide pulses to the output, but with a greatly reduced duty cycle. The duty cycle increases gradually as the voltage on pin 6 increases, until normal operation is restored.

#### Microprocessor-compatible

A remote-control port (pin 10) enables sequential or individual power-up and power-down of systems containing multiple switchers. The remote-command pin is compatible with transistor-transistor logic, as are all the other input pins. When left floating or tied to a voltage greater than 2 V, the IC functions normally. When pulled below 0.8 V, the output of the NE5560 will be inhibited.

The NE5560 is readily integrated into forward and flyback converters. Despite the complexity of these circuits, a minimum of external components is required for the controller.

In Fig. 3a, a flyback converter using the NE5560 transforms a 120-v, 60-Hz input to a 24-v, ½-ampere dc output. Feedback and current-sensing signals (pins 3 and 11, respectively) are derived from the various output stages in the power-transistor chain. Remote on/off commands, sync, and overvoltage protection may be easily implemented, but to keep the number of interconnections in an already crowded schematic to a minimum, the required wiring is not shown here.

The forward converter in Fig. 3b delivers low voltage at high current and so is useful in applications where a great deal of logic must be driven. Although the regulator is still complex, the number of its interconnections and its cost are both substantially decreased by the use of the one-chip controller.

#### Engineer's notebook.

## Avoiding latchup in foldback current supplies

by Karl Karash GenRad Inc., Test Systems Division, Concord, Mass.

Most open-frame power supplies operate with a fold-back-current-limiting circuit, which holds output power within limits as a function of the load. But if these regulators are used in a multiple output-voltage scheme, start-up and latch-up problems often occur because the user fails to examine the current-load characteristics of the supplies. When these are considered in view of the general guidelines presented here, the difficulties may be overcome.


In order to understand the origin of start-up and latch-up problems, observe the standard current-fold-back regulator circuit shown in (a). The typical volt-ampere characteristics of this regulator are shown in curves A and B in (b). Note that the load current is held to some maximum value that depends on the load, decreasing as the value of the load decreases. When the supply is operated over curve B, its power dissipation is held equal to or less than the maximum normal power dissipation—indicating that the regulator is protected by

virtue of foldback-current limiting.

If the load is a resistor (curve A), there is no problem in delivering power at any specified voltage. However, loads that appear to the regulator to be a current source (vertical line d-e), such as linear integrated circuits, have two operating states (points d and e) where the output current is identical for two different output voltages. This is due to the supply's foldback characteristic.

Thus, if the power supply assumes either state during a power-up with the current-source load, it will remain there. And if the regulator is in a multiple-supply configuration that makes no provision for turning on all supplies simultaneously, one or more regulators may be back-biased and will assume the state at point f permanently. This problem will occur with multiple inductor-type converters that are operating from one main transformer-type inverter. If the load should source the current from the main positive supply into a negative supply on power-up, the negative supply will be forced into the back-biased condition and may not start.

To avoid the start-up or latch-up condition, it is necessary to force the regulator into the straight current-limiting region (shaded area) on power-up. It is not easy or inexpensive to turn on all regulators simultaneously, especially after a momentary power outage, so a given regulator must be made to see a load with a defined resistive component. Adding a time constant to the fold-back-determining components, however, will allow its

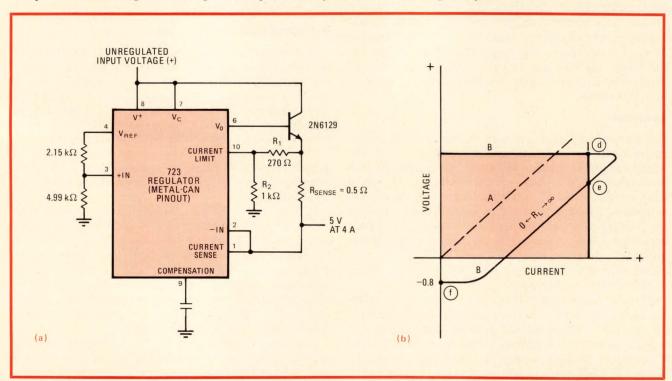

**Boxed in.** Typical supply (a) with foldback-limited characteristic (b) is subject to numerous startup difficulties that cause it to regulate at undesired voltage or not at all when used in a multiple output voltage scheme or with current-source loads. The trick is to bring regulator's characteristic within straight current-limit region (shaded area) on power-up, so operating point will be at other than d, e, or f.

transient turn-on characteristic to approach straight current limiting.

Straight current limiting can also be specified in the design. The latter is not usually done, because the current maximum will be independent of the load resistance. Consequently, a short circuit will, on the average, quadruple the normal maximum power dissipation in a typical 15-v supply, so the supply must be able to handle the increased requirement. Thus the cost, weight, and volume of an already expensive, heavy, and large supply must be increased by a considerable factor.

A simple way to approach straight current limiting with a small foldback-current supply, while avoiding the increased power dissipation caused by a short circuit, is to defeat its current-limiting characteristic and to provide external protection at the output with a 4-ampere fuse. Here, shorting pins 1 and 10 eliminates the circuit's ability to limit current on its own.

A reverse-biased Schottky diode such as the 1N5821 should be placed across the output as insurance against back-biasing of the supply. This is true whether or not the supply's current-limiting feature is used.

## Board continuity tester senses only dead shorts

by Andrew R. Morris
The Boeing Co., Wichita, Kan.

The average continuity tester is of limited usefulness in checking boards with a full complement of integrated circuits. The unit cannot differentiate between the true continuity of two test points and the low resistance (typically 5 to 20 ohms) of internal parts of any IC that may shunt the test points. In contrast, this tester triggers its audio oscillator when it detects a resistance of one ohm or less between its terminals. It draws low power,


too—typically 100 nanoamperes in the standby mode and 5 milliamperes maximum.

When a resistance of 1 kilohm or less is placed across the tester's input,  $Q_1$  turns on and applies power to the unit. Comparator  $A_1$  and resistance bridge  $R_2$ – $R_6$  then determine if the resistance across the input is 1 ohm or less, taking the 2.5-ohm resistance of fuse  $F_1$  into account. Assuming the probe is not placed across a coil winding or resistor having a resistance of 1 ohm or less, the tester will provide accurate indications.

F<sub>1</sub> and D<sub>4</sub> protect the tester from voltages that may be inadvertently applied. D<sub>1</sub> compensates for the base-to-emitter drop of Q<sub>1</sub>, in order to minimize bridge imbalance caused by variations in battery voltage.


 $A_1$  moves high if  $R_{in} \le 1$  ohm.  $A_2$  provides gain for oscillator  $X_1-Q_2$ , which works at 4 kilohertz.

Transducer X<sub>1</sub> is a modified piezoelectric buzzer, the

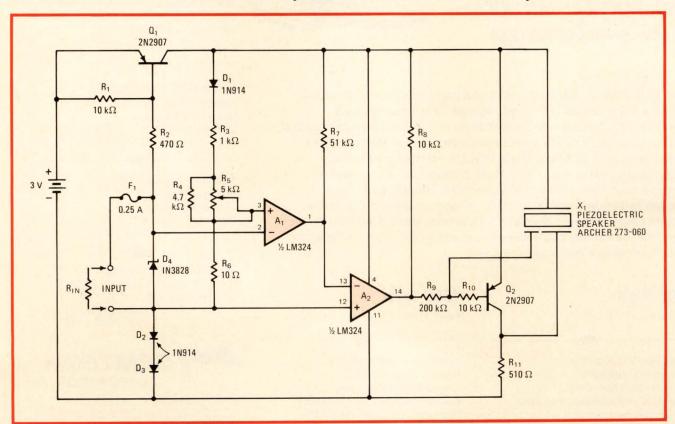

**Zeroing in.** Bridge R<sub>2</sub>-R<sub>6</sub> and comparator A<sub>1</sub> detect if R<sub>in</sub> is 1 ohm or below, thus performing test for true continuity (virtual dead short) between two test points on IC-filled circuit boards. Modified transducer X<sub>1</sub> and transistor Q<sub>2</sub> comprise 4-kHz audio-output indicator.

# Semtech Transient Voltage Suppressors

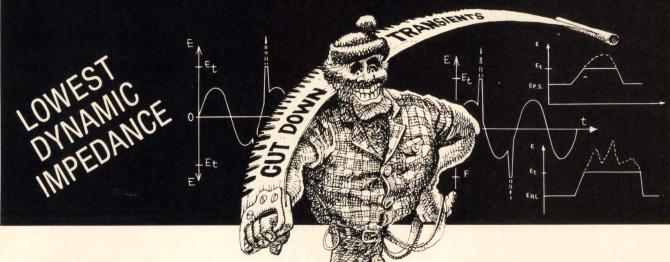

Can be supplied as JAN, JANTX or JANTXV to MIL-S-19500/516 (EL)

This new series of silicon bi-polarity transient suppressors is unique in that a single device will provide voltage transient protection symmetrically (i.e., provide protection for A.C. signals in addition to D.C.). This new series of devices has peak pulse power ratings of 500 to 1500 watts for 1 millisecond and its response time is effectively instantaneous (less than 1 x 10<sup>-12</sup> sec.). Therefore, these versatile devices have many protection applications where large voltage transients can permanently damage voltage-sensitive components. The devices are encased in Semtech's Metoxilite, fused directly to the high temperature metallurgically bonded assembly. For use in commercial, industrial, military and space programs.

#### 500 Watt

Peak Pulse Power

Types: IN6102 through IN6137
Break down Voltage V(BR):
From 6.8 to 200Vdc±10%
Peak Surge Voltage (Vsm): 11.0 to 286.0V
Peak Surge Current (Ism): 45.4 to 1.7A
Temperature Coefficient of (VBR): .05 to .11%/°C
Case Size (Max.): .140" D x .165" L

#### 1500 Watt

Peak Pulse Power

Types: 1N6138 through 1N6173
Breakdown Voltage V(BR):
From 6.8 to 200 Vdc ±10%
Peak Surge Voltage (Vsm): 11.0 to 286.0 V
Peak Surge Current (Ism): 136.4 to 5.2 A
Temperature Coefficient of V(BR): .05 to .11%/°C
Case Size (Max.): .180 " D x .165" L

#### LOW DYNAMIC IMPEDANCE VOLTAGE REGULATORS "ZENERS"

These new devices offer significantly lower dynamic impedance. Lower impedance means improvement in regulation ripple reduction and transient protection.

3 & 5 Watt SX6.8 thru 120

Nominal Voltage: 6.8 to 120 V (±5%)

Low Reverse Leakage

Dimensions (max.): Body .140"D x .165"L

Lead .040"D x 1.10"L

5 Watt 1N4954 thru 4984
Nominal Voltage: 6.8 to 120 V (±5%)
Low Reverse Leakage
Dimensions (max.): Body .140"D x .165"L
Lead .038"D x 1.10"L

10 watt SY6.8 thru 120 Nominal Voltage: 6.8 to 120 V (±5%) Low Reverse Leakage Dimensions (max.): Body .165"D x .165"L Lead .040"D x 1.10"L



652 Mitchell Road, Newbury Park, California 91320 (805) 498-2111 • (213) 628-5392 • TWX: 910-336-1264 CHICAGO: (312) 352-3227 • DALLAS: (214) 661-2217 FLORIDA: (305) 644-5404 • MARYLAND: (301) 937-0070 NEW YORK / NEW JERSEY: (201) 964-9305 SAN FRANCISCO: (415) 494-0113 • SEATTLE: (206) 455-4807 CANADIAN SALES: Avotronics, Ltd. (416) 493-9711 CHROPEAN SALES: Bourns AG Zug, Switzerland (042) 232-242

Archer 273-060: The transducer is removed from its original casing, mounted in the tester, and driven by a transistor, Q<sub>2</sub>, in order to minimize size and power consumption in the oscillator circuit. Alternatively, the unused sections of the LM324 device and a transistor

can be used to drive a small speaker if greater audio output is desired.

Engineer's notebook is a regular feature in *Electronics*. We invite readers to submit original design shortcuts, calculation aids, measurement and test techniques, and other ideas for saving engineering time or cost. We'll pay \$50 for each item published.

## Data-block transfer program is efficient and flexible

by Chris Lusby Taylor Intel International, Brussels, Belgium

Although the program described by Prakash Dandekar<sup>1</sup> will indeed transfer data blocks quickly, practical difficulties await users attempting to implement it in any but a dedicated-processing environment. This version of the routine is suitably modified so that the program may be used as a subroutine in any system.

Any program that modifies the stack pointer, such as Dandekar's, must afterward restore its previous value if

the program is to be used as a subroutine. The program given here provides for saving and restoring the stack pointer. Note that the system interrupts are disabled when the stack pointer calls for the appropriate data and are re-enabled after the old stack pointer location has been retrieved.

The 16-bit loop counter (locations 2019–2020) has been implemented as illustrated to increase program efficiency. Although simple, very few users seem to be aware of this technique.

Also note that the word count, not the byte count, is transferred to register pair D-E. Implementing the word count transfer is logical, since the routine transfers data in pairs of bytes, not bytes.

#### References

 Prakash Dandekar, "8080's stack pointer transfers data blocks fast," Electronics, Dec. 21, 1978, p. 118.

8080 BLOCK-TRANSFER PROGRAM							
LOC	OBJ CODE	SOURCE STATEMENT			COMMENTS		
2000 3000 3002 3004 3006 2000 2003 2004 2007 200A 200B 200C 200F 2010 2011 2014 2015 2016 2017 2018 2019 201A 201D 201E 2021 2024 2025 2026 2000	210000 39 220630 2A0030 F3 F9 2A0430 EB 14 2A0230 C1 71 23 70 23 1D C21420 15 C21420 2A0630 F9 FB	SSTAD DSTAD WRDCNT SPSAVE PREP1:	ORG EQU EQU EQU EQU LXI DAD SHLD LHLD DI SPHL LHLD XCHG INR LHLD POP MOV INX MOV INX DCR JNZ LHLD SPHL EI RET END	2000H 3000H 3002H 3004H 3006H H, 0 SP SPSAVE SSTAD  WRDCNT  D DSTAD B M, C H M, B H E LOOP1 D LOOP1 SPSAVE	;GET OLD SP ;IN SAVE LOCATION ;START OF SOURCE ;MUST DISABLE INTERRUPTS  ;GET WORDCOUNT IN DE ;ADJUST FOR DECREMENT SCHEME ;HL=START OF DESTINATION ;GET NEXT BYTES  ;RESTORE OLD SP ;RE-ENABLE INTERRUPTS ;RETURN		

#### Engineer's newsletter.

#### EIA modifies interface standard

Now that the popular RS-232-C serial binary data-communications interface is being phased out, the Electronic Industries Association is modifying the associated RS-366 interface between data terminals and automatic telephone-calling equipment. The new RS-366-A is compatible with the RS-423 electrical characteristics and the RS-449 interface. RS-422 and -423 were unveiled in April 1975 to gradually replace RS-232-C as the interface between data terminals and data-circuit-terminating equipment; RS-449 was adopted in November 1977 to specify the necessary new 37-and 9-connector plugs. The RS-366-A standard is available for \$14.00 from the Standards Sales Office, Electronic Industries Association, 2001 Eye Street, N. W., Washington, D. C. 20006.

#### Photodiodes respond in tens of picoseconds

Currently available photodetectors just can't handle the picosecond response time needed to display the short optical pulse outputs of mode-locked lasers. So to improve their sensitivity, Lloyd L. Steinmetz, who is an electrical engineer with the chemistry department at the University of California's Lawrence Livermore Laboratory, modified the insides of commercially available diode chips by selective etching of the active areas. He was able to do this inexpensively with both the Hewlett-Packard HP 5082-0024 Schottky-barrier switching diode and HP 5082-0001 p-i-n diodes. Now the devices easily respond to light pulses tens of picoseconds long, in the 257-nm-to-1-µm region. What's more, they have already stimulated some commercial interest, since the use of picosecond-pulse lasers has grown rapidly. For information, get in touch with Steinmetz at the laboratory, Livermore, Calif. 94550, or at (415) 422-6897.

#### Comsat offers index to R&D reprints

Research and development in communications satellite technology has resulted in many advances in the electrical engineering art. This work, much of which has been done by the Communications Satellite Corp. and its Comsat Laboratories, appears in diverse publications and places around the world and retrieving such scattered information is difficult. Worse yet, some of it is not widely known.


To help solve this problem, the company has put out a three-part catalog: Permanent Cumulation through 1971; Permanent Cumulation, 1972–1976; and Catalog of Technical Papers, 1977 to Date. The latest catalog contains a cumulative author index to all the papers.

Reprints from the Comsat Technical Review are published in a separate catalog index. To obtain copies of these (reprints older than five years may be out of print) or to have your name placed on the distribution list for the Catalog of Technical Papers, write to Laboratory Records, Comsat Laboratories, 22300 Comsat Drive, Clarksburg, Md. 20734.

#### Palladium can cut plating costs by a factor of 6

With the price of gold going up almost daily, it is well worth investigating the feasibility of replacing it with palladium in plating operations. Not only is palladium a quarter as expensive but often it need be only about two thirds as thick. Engineers at GTE Sylvania Inc.'s wire and bonded components plant in Warren, Pa., say they can deposit **thicknesses of 10 to 200 microinches** on a base material. Such a range is wide enough to take care of most of the literally billions of small pins, wires, and other parts that must be kept free of oxidation.

-Harvey J. Hindin

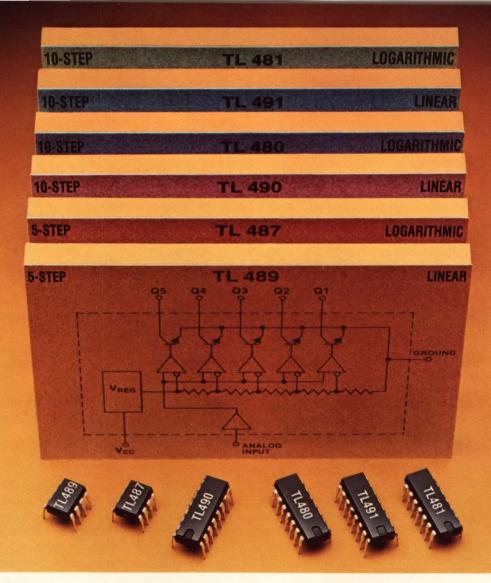

#### New analog level detectors. From Texas Instruments.

Our new line of monolithic analog level detectors is designed to meet all your cost/performance goals.

Each is unique. Because it combines a large number of components on a single chip—and sells for a fraction of the individual component cost.

#### Design flexibility

Now, for the first time, designers have more flexibility for a wider variety of applications.

Applications such as warning signal indicators, analog-to-digital converters, feedback regulators, industrial controls, audio level indicators—even light intensity and frequency detection.

#### Two degrees of resolution

TI analog level detectors are available as five and ten step detectors

in both linear and logarithmic scale formats. For applications requiring greater resolution than 10 levels, the 10-step linear detectors can be cascaded to detect up to 150 levels.

Both open-collector and openemitter output options are offered to yield an extremely versatile

Device	Input	Steps	Display Type	Price* 100 Pcs.	
TL489	Linear	5	LED	\$0.65	
TL487	Logarithmic	5	LED	0.65	
TL490	Linear	10	LED	1.08	
TL491	Linear	10	VF	1.22	

\*Prices effective March, 1979.

Commercial temperature (0°C to 70°C) operating range versions in plastic dual-in-line packages.

family of products capable of being custom-tailored to specific applications, using significantly less power than discrete versions.

Analog level detectors from Texas Instruments. A simple, cost-effective solution to all your level-sensing applications.

#### Free brochure

A new 12-page brochure (CL-410) gives full information on TI's line of monolithic analog level detectors and typical applications. Call your nearest authorized TI distributor, or write Texas Instruments Incorporated, P.O. Box 225012, M/S 308, Dallas, Texas 75265





#### TEXAS INSTRUMENTS

For a professional like John Bartlett, there exists a vast wealth of opportunities. To him, finding the challenge has never been the question. It's where that challenge exists. So very much depends on where a family lives; everything that makes up the quality of the lifestyle. When John accepted an offer to manage the Energy & Environment Group of The Analytic Sciences Corporation, it meant a cross-country move to Massachusetts. John and his wife, Helen, have lived in many interesting places. They are both people of remarkable personal resources. What did they find here? Just ask them.

The electric enthusiasm in Helen's voice sparks the tone of the conversation. "How can I begin?" she says, "Massachusetts . . . the many ways it provides for its people . . . the culture! Our daughters, Tanya and Larah, love the study of dance. Now they can go to classes every week at the Boston School of Ballet. Recreation? You name it! From the Cape Cod beaches to the Berkshires. And the shopping! Boston's Quincy Market, for example! It's a whole world in itself. A whole outdoor market-place of colorful flowers, music, and

ADDRESS

CITY/STATE ZIP

PHONE

Sponsored by the Massachusetts Employment Impact Council and the Massachusetts Department of Commerce and Development.

NAME

so much more! You know, out-ofstaters don't realize that so many really attractive suburban areas like our own town of Lynnfield are no more than a half hour away from Boston!"

John Bartlett speaks of how the move to Massachusetts has enriched his life. "You could put people into any location in the same job, within four walls — it would be the same. It's what's OUT THERE that's different. For me, the mind-enriching climate of Massachusetts is very real. There's just a mental sharpness that comes into every aspect of living and working here."

"As a living environment, I can't imagine anything better!" Helen continues, "You can grow or you can vegetate. In Massachusetts, you can't vegetate, because everywhere you go there is stimulus. I have a degree in math and used to teach full-time. When the children are grown, I can resume my teaching career here, and because of the many excellent educational facilities, I feel I'll have a better opportunity."

"Theater, art, every major league sport and recreational activity you can imagine is available here," John remarks. "And the sense of history here is just pervasive! I don't think you could find a more exciting place for a family to live."

"Massachusetts? It's kind of like looking for fine antiques. There's always life and magic in what you uncover," comments Helen.

John Bartlett and his family have found the life they've been looking for. They've found Massachusetts to be a remarkable blend of tradition and a vigorous contemporary spirit . . . a vintage of the old and state-ofthe-art new.

In John Bartlett's words, "We love it. I wish my peers in other parts of the country could experience Massachusetts."

If you would like to discover Massachusetts, fill out the coupon and mail it to:

Commonwealth of Massachusetts Department of Commerce and Development P.O. Box 8881 Boston, MA 02114

We will forward the booklets "Massachusetts In Perspective," a description of Massachusetts, and "Massachusetts, Because You Have A Choice," a listing of sponsoring high technology companies and the opportunities they have available.

# So much depends


















# on where you live.

Massachusetts: So Much Going For You.

# Nicolet EXPLORERS

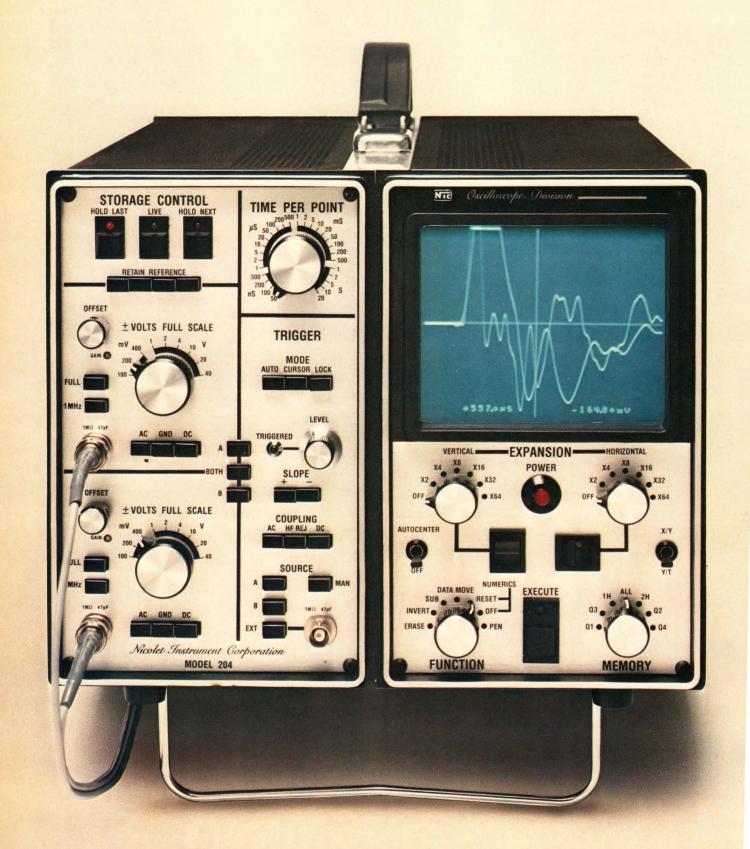

# ... as easy as I, III, IIII

# Three precise, high resolution digital oscilloscopes for analog signals

- Easy operation—storage at the touch of a button
- High precision
- Clear, concise display with no bloom, fade or flicker
- Excellent hard-copy graphics
- Optional digital records via internal disk recorder
- Retroactive sweep trigger
- XY or YT operation
- 20 times better resolution
- Display expansion to 64X, both axes
- Superimposed stored & live, stored & stored or live & live waveforms
- Option RS-232C and IEEE-488 interfaces

# NICOLET INSTRUMENT CORPORATION OSCILLOSCOPE DIVISION

5225 Verona Road, Madison, Wisconsin 53711 Telephone: 608/271-3333 TWX: 910-286-2737

#### **EXPLORERS OUTPERFORM:**

- Low frequency analog scopes
- Low frequency storage scopes
- Transient recorders
- XY recorders
- Strip chart recorders
- Light beam recorders
- Other digital oscilloscopes

EXPLORER I is priced at \$3,990 (U.S. domestic list price).

#### **NICOLET, WHO'S NICOLET?**

Nicolet is a leading manufacturer of digital electronic measurement instruments (signal averagers and FFT spectrum analyzers), analytical instruments (FT-IR and FT-NMR spectrometers), biomedical computers and digital graphic plotters. Nicolet's expertise in high technology digital instrumentation led to the first digital oscilloscope in 1973.

To learn how the EXPLORERS can help you, call toll free, 1-800/835-2246 (in Kansas, 1-800/362-2421) and request our new brochure. To discuss your application or to arrange a demonstration, call 608/271-3333.

#### SALES AND SERVICE OFFICES WORLDWIDE

#### CANADA:

Nicolet Instrument Canada Ltd. 1-1200 Aerowood Drive Mississauga, Ontario L4W 2S7 (416) 625-8302

#### ENGLAND:

Nicolet Instrument Ltd. Budbrooke Road Warwick, Warwickshire (0926) 44111

#### GERMANY:

Nicolet Instrument GmbH Frankfurter Strasse 121 6050 Offenbach am Main West Germany. 0611-812075


#### FRANCE:

Nicolet Instrument S.A.R.L. 16, Rue Champ Lagarde 78000 Versailles (331) 951-27-40

#### JAPAN:

Nicolet Japan Corporation
Daisho Building, Room 1001
8-7, 6 Chome
Nishinakajima, Yodogawa-ku
Osaka 532. 06-305-2150
Nicolet Japan Corporation
Meiwa Building
1-23-11- Kami-Takaido
Suginami-ku
Tokyo 168. 03-329-2511

Circle 153 on reader service card

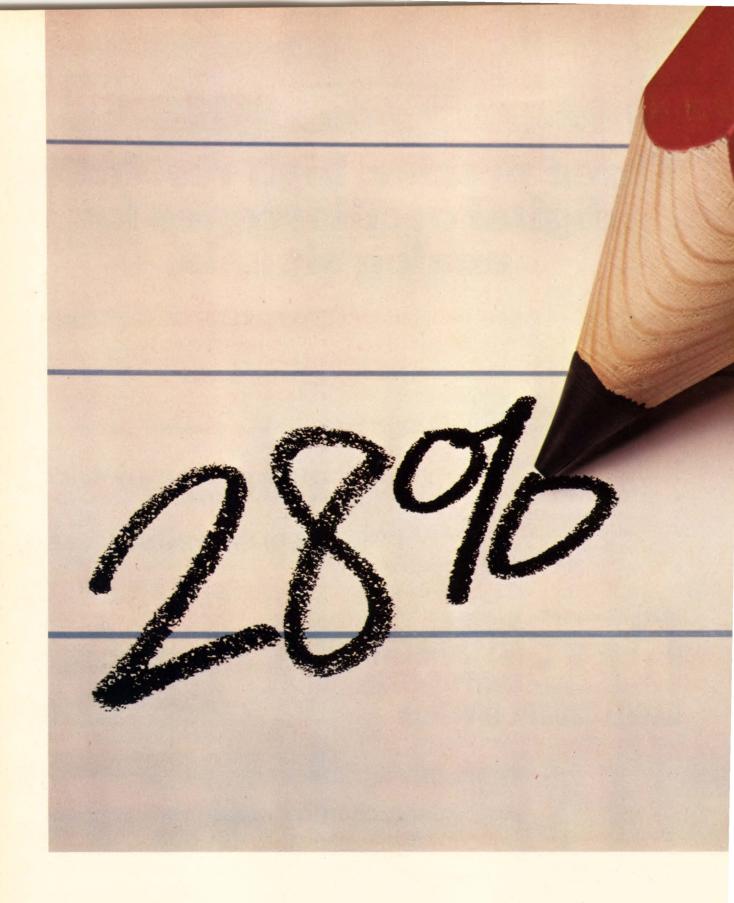

This announcement is published by IDA Ireland, 200 Park Avenue, New York, 10017, which is registered under the Foreign Agents Registration Acts, as amended, as an agent of the Government of th




# The highest return on investment in the Common Market.

# REPUBLIC OF IRELAND The most profitable industrial location in Europe.

US Department of Commerce statistics for the period '74-77 show a 28% average annual return on investment for US manufacturers located in the Republic of Ireland-more than twice the European average.

The Irish government's industrial development agency has offices in New York, Tel (212) 972-1000; Chicago, Tel (312) 644-7474; Houston, Tel (713) 658-0055; Los Angeles, Tel (213) 624-1024. Overseas offices also in Toronto, Amsterdam, London, Paris, Cologne, Stuttgart, Copenhagen, Milan, Madrid, Tokyo and Sydney.

This material is filed with the Department of Justice where the required registration statement is available for public inspection. Registration does not indicate approval of the contents by the United States Government.

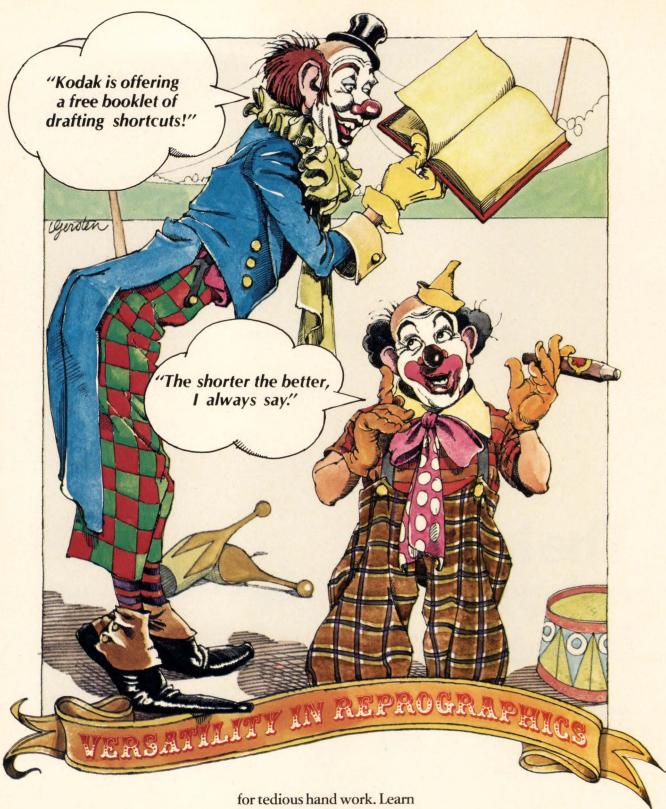

The long and short of it is that our booklet entitled "Versatility in Reprographics" can show you how to save time and money in your drafting operations. And it's free!

Learn how you can substitute photographic techniques for tedious hand work. Learn about the snappy restoration shortcut...the repetitive element shortcut...the drop-of-water shortcut...and more. See how these reprographic techniques and Kodak materials can help you reduce drafting costs, often by a third, and sometimes, by even as much as 90%.

Just drop us a note on your letterhead: Eastman Kodak Company, Dept. GD010, Rochester, N.Y. 14650.

© Eastman Kodak Company, 1979

#### S-d converter has three-state latches

Offered in 10- and 12-bit models, microprocessor-compatible module delivers output data without interrupting its conversion process

by Pamela Hamilton, Boston bureau

For an engineer trying to design a tracking synchro-to-digital converter into a microprocessor-based control system, life can be difficult. First, existing s-d converters cannot be directly attached to a microprocessor bus. Second, getting digital data out of a converter is not as easy as it sounds. Grabbing it on the fly is not a good idea because the data may be changing just as it is being sampled—a situation that can lead to very large errors. Inhibiting the converter to freeze the output works well enough in applications that do not require fast repetitive sampling, but not in high-speed systems because the converter must be given time to catch up with the changing input data after being inhibited. Using the converter's BUSY output to identify points in time when the output is stable does work, but it requires a fair amount of design time and external componentry.

Analog Devices Inc.'s latest s-d converter has solved both of these problems by including a set of latches and three-state outputs in the converter package. Not only does this scheme make microprocessor interfacing a snap, "but with tristate latches, the loop is always closed and the internal data is always valid," explains Edward H. Friedman, product line manager for synchro converters.

Both the SDC1725 12-bit converter and the SDC1726 10-bit module are continuous tracking units built around a type 2 servo loop. Their input signals may be either three-wire synchro plus reference or four-wire resolver plus reference. Internal Scott T and reference microtransformers for frequencies of 60, 400,

and 2,600 Hz are available.

The 12-bit SDC1725 is accurate to within ±3.2 arc-minutes ±1 least significant bit. For the 10-bit SDC1726, the first figure becomes 22 arc-minutes. Both converters can work with line-to-line signal voltages of 11.8 and 90 v rms and have minimum tracking rates of 5 revolutions per second (60 Hz), 36 rps (400 Hz), and 75 rps (2.6 kHz). For the same three reference frequencies, the response times to within 1 LSB for a 179° input step are 1,500, 125, and 50 ms.


The converters draw ±25 mA at ±15 v and 120 mA at 5 v. They work from 0° to 70°C, with operation from -55° to +105°C available as an extra-cost option. The modules measure 3.125 by 2.625 by 0.35 inches and weigh 3.5 oz. Friedman notes that the 0.35-in. height will be

particularly attractive to engineers designing systems in which printed-circuit boards are spaced 0.5 in. apart.

Applications for both converters include servomechanisms, antenna monitoring, simulators, and industrial controls. The three-state outputs also simplify multiplexing more than one converter onto a data bus, according to Friedman, who notes that one customer already has plans to use these converters on a robot arm to control machine tools.

The 12-bit converter will sell for \$355 in quantities of one to nine; for the 10-bit unit, the corresponding price will be \$295. Delivery is from stock to eight weeks.

Analog Devices Inc., Route 1 Industrial Park, P. O. Box 280, Norwood, Mass. 02062. Phone Edward Friedman at (617) 329-4700 [338]

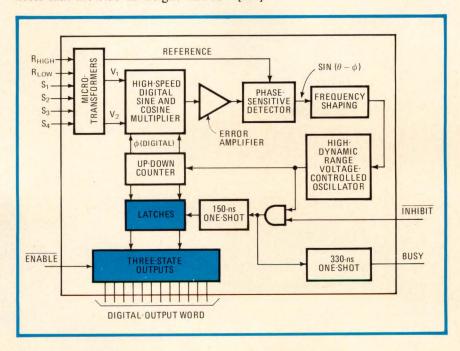



## has it now...a truly economical

# flat cable system

# for high speed assembly using tooling you already have

#### This RN IDC System delivers what engineers want...

- Advanced automated manufacturing facilities enable RN to cut costs
   — pass the savings on to you
- Fewer pieces for faster assembly, reduced inventory
- Can be assembled with IDC tooling already in place
- Each connector made more rugged, more resistant to shock, vibration and cable strain
- Assured reliability and compatibility of cable and connectors RN supplies both

Economical, easy to use—once properly adjusted, all RN IDC connectors can be assembled with a simple base plate change



Hand Held crimp tool for assembling IDP series Cable Plugs and IDT series Transition Connectors


entire IDC product line.

Bench mounted crimp tool for assembly of all RN IDC connectors.

**WRITE TODAY** for new Robinson-Nugent Insulation Displacement Connector catalog with complete specifications and dimensions on the





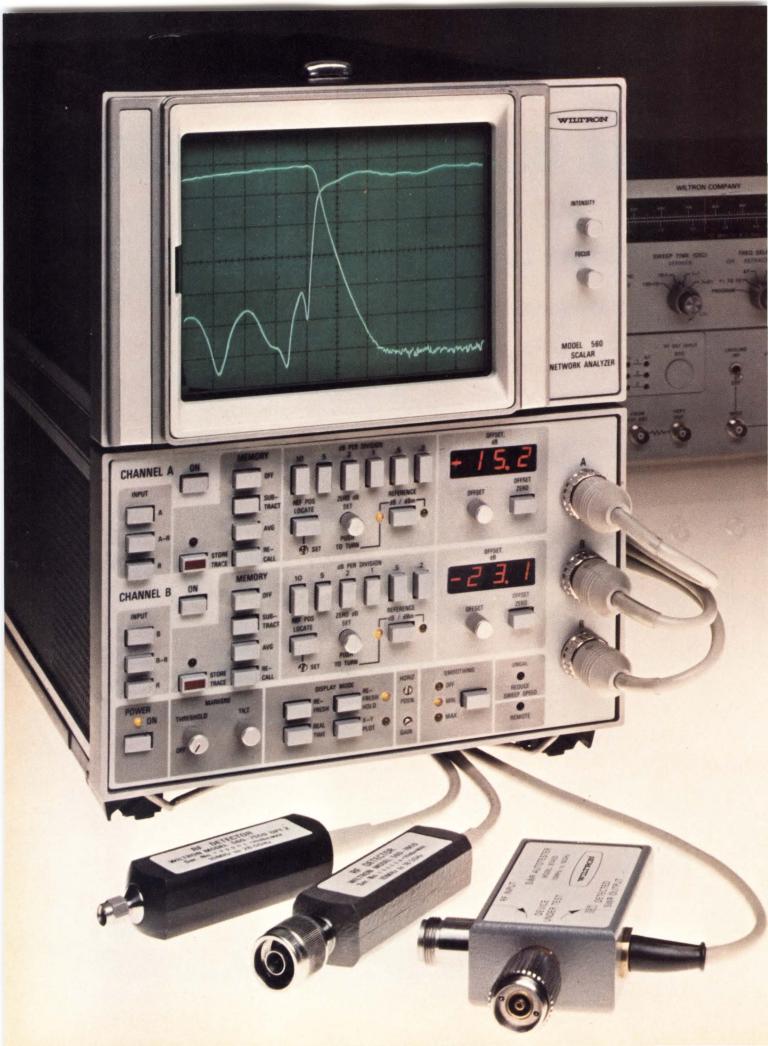



# The First GPIB Network Analyzer. ...10 MHz to 34 GHz.

#### It's a Wiltron.

Introducing the Wiltron 560 Scalar Network Analyzer. Use it for easy, accurate, low cost measurement of transmission loss or gain, return loss (SWR) and absolute power. Use it manually or under GPIB control.

Use it with a Wiltron 610D Sweeper or equivalent for a continuous dual display of loss or gain, return loss or power in dB or dBm in the 10 MHz to 18 GHz range. The 560 is delightfully easy to use. Controls are clearly marked and intelligently laid out. Built-in logic and memory virtually eliminate erroneous and uncertain test data.

#### No other network analyzer has all these features.

GPIB programmability with 0.01 dB resolution. • 66 dB (+16 dBm to -50 dBm) dynamic range. • Better than 40 dB directivity from 10 MHz to 18 GHz. • New WSMA Detector with 10 MHz to 34 GHz range. • Automatic power measurement calibration. • LED readouts - no mechanical type readout controls.

· Sweeper marker display with TILT Control.

· Memory-corrected output data. · Refreshed non-flickering display. · Broadband components that make uninterrupted transmission measurements from 10 MHz to 34 GHz and return loss from 10 MHz to 18 GHz. • Makes measurements with wave guide components. • No modulation required.

#### 40 dB directivity.

For high accuracy, the 560 offers 40 dB directivity with reference calibration enhanced by memory that stores the average of reflections from a short and an open. System residuals are subtracted from test data leaving only the test device characteristics for display. For a permanent record, use a CRT camera or X-Y plotter or under GPIB control, drive an X-Y plotter or printer.

#### Prices begin at \$5900.

For an instrument with so many applications, prices are remarkably low—\$7250 with GPIB or \$5900 without. A fully automated turnkey system, the Model 5610 which includes all necessary hardware and software is also offered.

For an early demo or full data on the 560 or 5610, phone Walt Baxter, (415) 969-6500 or address Wiltron, 825 East Middlefield Road, Mountain View, CA 94043.

WILTRON

#### **New products**

Components


## Hybrids match switcher parts

Optimized diode-transistor circuits provide high switching speeds

Like many other engineering activities, switching-regulator design has its less enjoyable side. Matching switching transistors and commutating diodes is probably about as unenjoyable a part of switcher fabrication as one is likely to run across, so the designers of such power supplies should welcome a new power circuit that guarantees the compatibility of the Schottky rectifiers and the transistor chips. "Our focus is on the power components," notes Harvey F. Hodsdon, market manager for industrial electronics. "We've combined them in one package, we've specified the parts properly, and we've taken the hassle out of the design process by providing both devices in one package."

Two main series of power circuits are offered: the high-current PIC700 series and the high-voltage PIC800 family. Between them, the families comprise a total of six hybrid power

**Matched.** The high-current PIC700 device (below) and the high-voltage PIC800 (right) contain carefully matched transistors and diodes for fast switching and low noise.




integrated circuits (PICs).

High current. The PIC700 series has two members, both of which can deliver a peak output current of 30 A. The PIC730 accepts 30 V, whereas the PIC740 can handle input voltages up to 40 v. Both units have a continuous output-current rating of 20 A and a drive-current rating of 5 A. Designed to be driven by standard IC voltage regulators, the 730 and 740 both have maximum instantaneous forward-voltage drops of 0.6 v at 20 A. Their careful matching of diode and transistor keeps inductive switching times to 300 ns maximum for current, and 350 ns maximum for voltage.

Packaged in a three-pin TO-3 case, the 730 and 740 will operate from -55° to +125°C. They will find application in high-efficiency buck- and flyback-type switching regulators.

High voltage. For designers who need a low-current, high-voltage device, the PIC800 family offers four units. The PIC800 and PIC810 operate at 350 V input, where the PIC801 and PIC811 can go up to 400 V. All four units can deliver a continuous output current of 8 A with a 2-A drive.

The difference between the 800/801 and 810/811 devices is that the Schottky diode is reversed in the latter devices, allowing the engineer to design high-voltage buck or



## Call your Amphenol® Connector Distributor

ARIZONA Cetec Moltronics Phoenix (602) 272-7951 Wyle/Liberty Electronics Phoenix (602) 249-2232

(602) 249-2232
CALIFORNIA
Bell Industries
Sunnyvale
(408) 734-8570
Kierulff Electronics
(23) Diego
(714) 278-2112
Wyle/Elmar Electronics
Santa Clara
(408) 727-2500
Wyle/Liberty Electronics
El Segundo
(213) 322-8100
San Diego
(714) 278-5020
San Diego
(714) 278-5020
South Gate
(213) 773-6521
Sterling Electronics
Santa Clara

COLORADO Newark Electronics Denver (303) 757-3351 Wyle/Elmar Electronics Commerce City (303) 287-9611

CONNECTICUT Connector Co. New Haven (203) 624-0127 Wilshire Electronics Hamden (203) 281-1166

FLORIDA Arrow Electronics Palm Bay (305) 725-1480 Cramer Electronics Orlando (305) 894-1511 Kierulff Electronics St. Petersburg (813) 576-1966 Schweber Electronics Hollywood (305) 927-0511

GEORGIA Arrow Electronics Doraville (404) 455-4054 Cramer Electronics Norcross (404) 448-9050

ILLINOIS
Bell Industries
Chicago
(312) 982-9210
Klaus Radio, Inc.
Peoria
(309) 691-4840
Newark Electronics
Chicago
(312) 638-4411
Ohm Electronics, Inc.
Palatine
(312) 359-5500
Schweber Electronics
Elk Grove
(312) 639-2740

INDIANA Genesis Electronics South Bend (219) 287-2911 Graham Electronics Indianapolis (317) 634-8202

KANSAS Interstate Electronic Wichita (316) 264-6317 Wichita Aircraft Wichita (316) 838-1421

MARYLAND
Arrow Electronics
Baltimore
(301) 247-5200
Cramer Electronics
Gaithersburg
(301) 948-0110
Pioneer Electronics
Gaithersburg
(301) 948-0710
(301) 948-0710

MASSACHUSETTS
Cramer Electronics
Newton
(617) 969-7700
Industrial Components Corp.
North Wilbraham
(413) 596-3854
Kierulff Electronics
Billerica
(617) 935-5134
Schweber Electronics
Bedford
(617) 890-8484
Wilshire Electronics
Burlington
(617) 272-8200

MICHIGAN RS Electronics Livonia (313) 525-1155 Wedemeyer Electronic Co. Ann Arbor (313) 665-8611 MINNESOTA Arrow Electronics Edina (612) 830-1800 Cramer/Bonn Co. Edina (612) 835-7811 Newark Electronics Minneapolis (612) 331-6350

LCOMP Electronics Kansas City (816) 221-2400 Maryland Hts (314) 291-6200 Olive Electronics, Inc. St. Louis (314) 426-4500 Walters Radio Supply Kansas City (816) 531-7015

NEW JERSEY Radio Electric Service Co. Pennsauken (215) 925-6900 Schweber Electronics Fairfield (201) 227-7880 Wilshire Electronics Clifton (201) 340-1900

NEW YORK
Arrow Electronics
Farmingdale
(516) 694-8800
Genesse Radio Parts Co.
Buffalo
(716) 873-9661
Harvey Electronics
Binghamton
(607) 746-8211
Progress Electronics
Plainview
(516) 433-1700
Schweber Electronics
Westbury
(516) 334-7474
Simcona Electronics
Rochester
(716) 328-3230
Summit Distributors
Buffalo
(716) 884-3450

NORTH CAROLINA Cramer Electronics Winston-Salem (919) 725-8711

OHIO Proneer Electronics Cleveland (216) 587-3600 Dayton (513) 236-9900 Schuster Electric Co. Cincinnati (513) 984-1630 Schweber Electronics Beachwood (216) 464-2970

OKLAHOMA Electro Enterprises Oklahoma City (405) 478-1752

PENNSYLVANIA Almo Electronics Philadelphia (215) 698-4000 CAM/RPC Indus. Electronics Pittsburgh (412) 782-3770 Pyttronic Industries Montgomeryville (215) 643-2850

TENNESSEE Electra Distributing Co. Nashville (615) 329-3971

TEXAS
Alliad Electronics
Ft. Worth
(817) 336-5401
Hamilton/Avnet
Dallas
(214) 661-8661
Sterling Electronics
Dallas
(214) 357-9131
Houston
(713) 627-9800
Texas Instrument Supply Co.
Dallas
(214) 238-6862

UTAH
Diplomat/Alta
Salt Lake City
(801) 486-4134
Standard Supply Co.
Salt Lake City
(801) 486-3371

WASHINGTON Bell Industries Bellevue (206) 747-1515 Wyle/Liberty Electronics Seattle (206) 453-8300

WISCONSIN Electronic Expeditors Milwaukee (414) 228-8100

CANADA: Distributors in major cities

# Big winners: four jacks.


Reader service number 141

-position

6-position Reader service number 163 8-position non-keyed Reader service number 140

8-position keyed
Reader service
number 162

Actual size



If you're plugging equipment into the telephone network, connect Amphenol 285 Series modular jacks to your equipment. You'll get standard interfacing with telephone double-ended modular plug/cords.

Your choice of four jack configurations: 6-position. 8-position non-keyed. 8-position keyed. 8-position series.

Amphenol modular jacks can be mounted to PC boards or panel cutouts, either vertically or horizontally. We also offer the widest choice of terminations: Stripped ends. Spade lugs. Ring lugs. Taper pins. And all wire leads are color-coded.

For complete information, technical data, dimensions and prices, contact your nearest Amphenol North America sales office or distributor.



#### **AMPHENOL NORTH AMERICA**

A Division of Bunker Ramo Corporation

Amphenol North America Division Headquarters: Oak Brook, Illinois 60521

Sales Offices: Atlanta (404) 394-6298 • Boston (617) 475-7055 • Chicago (312) 449-1880 • Dallas (214) 235-8318 • Dayton (513) 294-0461
Denver (303) 758-8033 • Detroit (313) 722-1431 • Greensboro (919) 292-9273 • Houston (713) 444-4096 • Indianapolis (317) 842-3245
Kansas City (816) 737-3937 • Knoxville (615) 690-6765 • Los Angeles (213) 649-5015 • Minneapolis (612) 835-4595 • New York (516) 364-2270
Orlando (305) 647-5504 • Philadelphia (215) 653-8750 • Phoenix (602) 265-3227 • St. Louis (314) 569-2277 • San Diego (714) 272-5451
San Francisco (408) 732-8990 • Seattle (206) 455-2525 • Syracuse (315) 455-5786 • Washington, DC (703) 524-8700
Canada: Montreal (514) 482-5520 • Toronto (416) 291-4401 • Vancouver (604) 278-7636 • International: Oak Brook, Illinois TELEX 206-054

## Yes! There is a Stator Yoke for 110° (RT's!

The Syntronic Data 110
Stator Core Yoke will
produce clean, clear
dot/matrix or stroke-written
characters anywhere on a
110° CRT . . . over 6000 of
them on a 15" diag. screen.

This is achieved using a precision-tooled ferrite stator core, built-in geometry correction, complementary coil turns distribution, and interlocking components for repeatability in volume production.

If a saddle yoke doesn't do the job . . . evaluate the Data 110 Yoke.
Ask for Bulletin #033.



Data 110 Stator Yoke



Phone: (312) 543-6444

#### **Electronics review**

flyback regulators with the 800 or 801 and single-ended half bridges, full bridges, deflection circuits, or do motor drives with the 810 or 811. Hodsdon points out that two 810s or 811s are needed for a half-wave bridge, but four are required for a full-wave bridge for a switching power supply.

Like the PIC700 series, the 800 family devices each contain a power transistor and a catch diode in a single package. Like the two 700-series units, the four 800-series circuits are hybrid devices built on beryllia substrates for low thermal impedance. Units in the 800 family are housed in four-pin TO-66 cases and operate from -55° to +125°C.


Prices for the PIC700 family start at \$12 each for the 730, while those for the PIC800 series begin at \$8 each for the 810. Shipments are scheduled to commence in July with delivery times of about six weeks.

Unitrode Corp., 80 Pleasant St., Watertown, Mass. 02172. Phone Harvey Hodsdon at (617) 926-0404 [341]

#### Adjustable state-variable filters pass or reject audio signals

Housed in packages measuring 1.35 by 2.35 by 0.6 in., the model APN-6 and APB-6 are stagger-tuned bandpass and band-reject filters, respectively. By adjusting potentiometers built into the active state-variable filters, users can position each of three pairs of poles to set the bandwidth of the desired pass band or notch or to create three separate



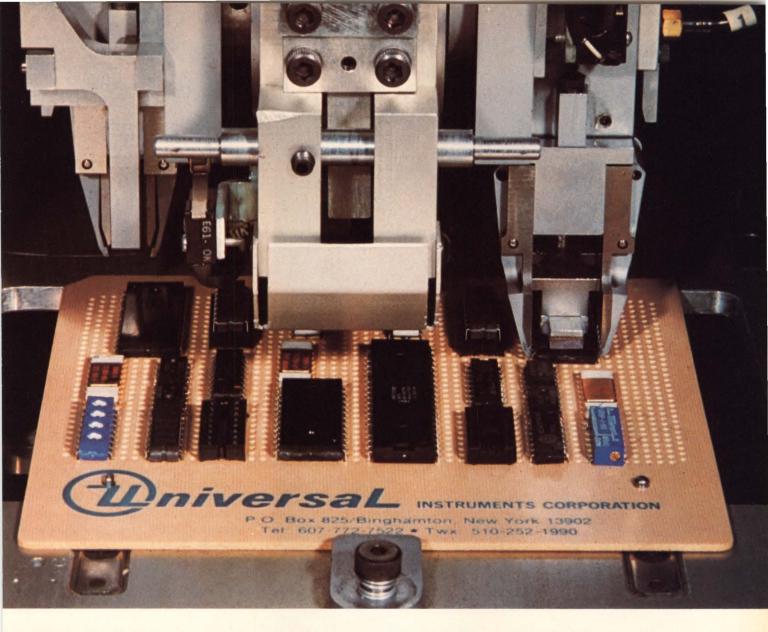

# "Multi-Module" can insert all these DIPs and sockets in a single high speed sequence.

Universal's family of "Multi-Module" machines opens the door to new, far higher levels of productivity. Now a single machine can automatically insert DIPs with two different lead spans in a single high speed sequence. You can combine .300" lead span DIPs and sockets with .400" or .600" DIPs. Another member of the family combines inserting 2 and 4 lead types with conventional DIPs. Up to 72 input magazines. Plastic, ceramic or side brazed. Automatic inward/outward cut and clinch.

Call your Universal sales office for a demonstration, or send for information.



Universal Instruments Corporation Kirkwood Industrial Park Box 825, Binghamton, New York 13902 Tel: 607/772/7522 TWX: 510/252/1990



# The most complete PCB design facilities in North America



Reliable computer artwork with personalized support is the trademark of each PCB design at Digital Graphics. Packaging densities of more than 2 equivalent IC's/SQ. IN. are possible using one of several techniques available. Our facilities include Computer Assisted Design (CAD) and Design Automation (DA) equipment. Call for an estimate. For a final quotation please supply your schematic, parts lists and mechanical drawing of your board. We will provide • 2 layer or multilayer master artwork • drill graphics solder mask • silk screen • N/C tapes • assembly and detail documentation • prototype boards.

Toronto (416) 495-9633 Ft. Lauderdale (305) 485-9272 Montreal (514) 683-3044 Buffalo (716) 847-8835 Cleveland (216) 835-0525 New England (203) 322-6126

Digital Graphics



Circle 166 on reader service card

# The magazine you're reading now could be your own.

Drop off the routing list. Get your own fresh, unclipped copy mailed to your home or office. Turn to the subscription card in the back of the magazine. If somebody has beat you to it, write: Electronics, P.O. Box 430, Hightstown, N.J. 08520.

#### **New products**

pass bands or notches. Center frequencies can range from 2 Hz to 30 kHz. Separate integral potentiometers are provided to adjust band gain or notch depth.

The filters' set frequencies are stable to within 50 ppm. They operate from  $\pm 15$ -V supplies, drawing 35 mA from each; for low-power applications, 3-mA versions are also available. Input impedance is 20 k $\Omega$  and maximum input is 8 V rms.

The output impedance of the filters is less than 1  $\Omega$  and dc offset is 5 mV, externally adjustable. With the input shorted, output noise is 70  $\mu$ V rms.

The six-pole units can be supplied in Bessel, Butterworth, Chebyshev, and elliptical versions. A printed-circuit board with trimmers and capacitors for mounting the filters, designated model S-AP6, is also offered. Standard filters are priced at \$150 each in quantities of 3 to 10. Delivery time is one to three weeks.

A. P. Circuit Corp., 865 West End Ave., New York, N. Y. 10025. Phone Felix Ellern at (212) 222-0876 [343]

#### Brushless dc motors offer 14-oz-in. torque

Brushless dc motors of the 1AD42/43 series exhibit maximum rated operating torques of up to 14 oz-in. and maximum starting torques of up to 28 oz-in. These ratings make the units suitable for use in printers and tape drives.

Motors in the series can be supplied with integral tachometer/position-encoder circuitry. In quantities of 1,000, they are priced from \$34 each.

Siemens Corp., 186 Wood Ave. S., Iselin, N. J. 08830 [345]

#### Low-profile transformers plug into pc boards

The PF6 and PF12 series of power transformers were designed for mounting on printed-circuit boards. The 6-VA PF6 units are 0.850 in.

#### Fight the protection racket.

Why pay for back-to-back zeners to get positive/negative protection, when a single Panasonic ZNR can provide complete, highly reliable circuit protection in either direction... and for less cost.

These zinc oxide nonlinear resistors also provide an excellent alternative to RC circuits and spark gaps. Their ohmic values change in less than 50 nsec when subjected to impulse surges, so their response time is fast...without the discharge lag conventional gap-type arrestors can't avoid.


Result: you can use them for ground fault interrupter circuits or input line transient protection. Use them in applications ranging from low-voltage switchboards and communications equipment to video displays and TVs. Use them anywhere you want an economical, efficient way to



protect vulnerable AC and DC circuits against repeated high voltage transients (positive or negative), or such steep-rise surges as those caused by lightning, switching or noise spikes.

Providing excellent temperature and humidity characteristics, ZNR's are available in a wide varistor voltage range—from 22 V to 1800 V in the PC-mountable D Series and the top-connected, flange-mounted E Series, and in stacked types for voltages up to 26 KV. Surge withstand capabilities are from 50 to 2,000 amps in the D Series or 2 500 to 20 000 in

ties are from 50 to 2,000 amps in the D Series, or 2,500 to 20,000 in the E. Our D series includes several UL recognized numbers for line voltage applications. For complete details, samples and prices, write or call: Panasonic Company, Electronic Components Division, One Panasonic Way, Secaucus, N.J. 07094; (201) 348-7282/7289.

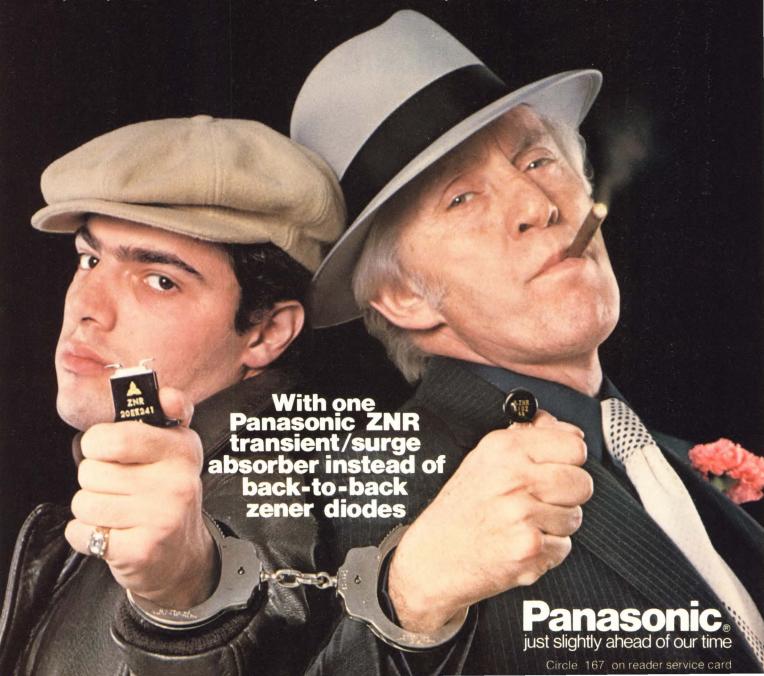



# NEED RELIABLE CIRCUITRY? ELORG ELECTRONIC TUBES WILL DO THEIR BIT!

A variety of receiving and transmitting tubes include

- octal, bantam, subminiature, acorn, cermet, pulse and modulating models for a wide frequency range;
- superdurable tubes (lifetime of up to 10,000 hr);
- tubes that endure tough operating conditions (vibratory load of up to 10 g, G tolerance of up to 100 g, repeated impact load of up to 120 g, and random impacts of up to 500 g);
- tubes for temperature range of  $-70^{\circ}$  C to  $+200^{\circ}$  C.


All the tubes are subject to quality inspection by 30 parameters.

#### Sole exporter -



32/34 Smolenskaya-Sennaya 121200 Moscow USSR Telephone 251-39-46, Telex 7586

#### **New products**



high and weigh 7 oz; the 12-VA PF12 types are 1.065 in. high and weigh 11 oz. All transformers in the series are dual-primary units capable of working from either 230-V, 50-Hz or 115-V, 60-Hz lines.


Primary and secondary windings are terminated in pins to permit easy board mounting and pin jumpering of the primary inputs for compatibility with domestic or overseas line voltages. The transformers also have dual secondary outputs that can be connected in parallel or series. Models are available with output ratings ranging from 5 to 56 v rms and 1.2 to 0.1 A.


The transformers are built using a split bobbin to decrease leakage and with balanced windings to reduce magnetic-field radiation. In quantities of 100, they range in price from \$8.80 to \$11.30 apiece; delivery is from stock.

Microtran Inc., P. O. Box 236, Valley Stream, N. Y. 11582. Phone (516) 561-6050 [346]

#### Small trimming capacitors mount in many ways

Available in a variety of mounting configurations, a line of 0.375-in.-diameter trimming capacitors uses a stator-rotor design that increases electrical stability, according to the manufacturer. The stator-termi-



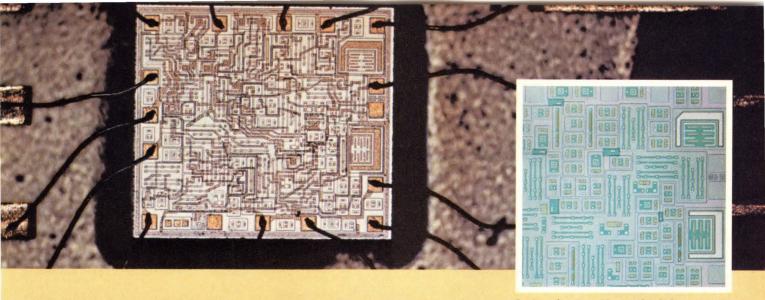

# This integrated circuit was manufactured to a custom design and delivered in a matter of weeks.

YOU CAN CUT DEVELOPMENT TIME UP TO NINE MONTHS ON BIPOLAR AND 1<sup>2</sup>L CUSTOM CHIPS...WHILE YOU SLICE COSTS TO THE BONE...THROUGH THE UNIQUE "SEMI-CUSTOM DESIGN PROGRAM" FROM EXAR INTEGRATED SYSTEMS. Compared to traditional development times for custom ICs, which frequently exceed one year, and tooling costs which can be five to ten times greater, this new concept allows custom chips to be justified economically at far smaller quantities than previously thought practical.

#### How the semi-custom idea works.

Exar's standardized circuits contain undedicated active and passive components such as transistors, resistors, logic gates, etc., fabricated onto the chip, but left unconnected. You choose how to interconnect these components to create your own custom circuit. The actual interconnection process is simple, requiring only one to three layers of tooling. As a result, development time compresses drastically, becomes far less expensive and virtually risk free.

#### Choose from eight different chips.

Five of the standard semicustom chips are bipolar, and are best suited for linear de-

signs. Some (XR-A100, XR-C100, XR-F100) feature high current NPN output transistors, making them suitable for drive circuits. The others (XR-B100, XR-D100), more appropriate for signal amplification or control circuits, contain only small signal, low current transistors. All, however, present the designer a wide variety of NPN and PNP transistors, Schottky diodes, various resistors and ample bonding pads.

Exar's three I<sup>2</sup>L digital chips (XR-300, XR-400, XR-500) contain high density I<sup>2</sup>L logic arrays and bipolar interface circuitry. Outwardly they look and per-

form like a bipolar LSI chip, readily interfacing with TTL or MOS level signals. This feature, incidentally, makes it very convenient to retrofit I<sup>2</sup>L LSI designs into existing MOS or TTL logic systems.

And Exar has in development additional semi-custom chips offering even greater applications flexibility.

If you decide to modify your design. Even after evaluation of initial design prototypes, if you see a need to modify the custom chip, a new design iteration usually takes less time than the original development cycle. And typical costs of additional design cycles are proportionately less than the original prototype de-

#### What about second sources?

velopment cost.

This is one of our most asked questions. In response, Exar has made alternate-source agreements with other IC manufacturers, so you can specify and order custom circuits with confidence.

#### Testing, testing.

After prototype acceptance of semicustom devices, Exar will develop software and fixtures for fully testing all production ICs. Production devices receive 100% electrical testing, and are Section of an Exar Master Chip before customizing. Note the individual circuit components already on-chip, but still unconnected. After the customer has designed circuit connections according to his system needs, Exar prepares a final mask and fabricates the custom chip, as shown in large photograph above.

screened to agreed-upon Acceptable Quality Level (AQL) standards. Charges for this test engineering are nominal, and vary depending on the complexity of the tests.

#### Semi-custom to full custom. For when the numbers get big.

Because Exar manufactures its own wafers, it can grow with your needs. As your product matures we can convert your semi-custom chip into a customized IC. Consider the advantages: You get the quick, inexpensive turnaround of semicustom chips, providing prototypes and intial production units; then when your design has proven itself and your market has developed, the subsequent full custom product provides further cost savings at high volume production...often with a significant improvement in product performance!


#### Design kits make it simple.

Exar provides linear and digital design kits, including circuit components for breadboarding, comprehensive design manuals and layout worksheets corresponding to Exar's master chips. These, as well as technical assistance when you need it, will speed and simplify your preliminary steps toward custom IC design.

#### Learn the economics and advantages of semi-custom.

Exar's entire semi-custom story is detailed in a 40-page data book, "Semi-Custom IC Design Programs." For your copy, write on company letterhead to your nearest Exar representative or to Exar, 750 Palomar Ave., Sunnyvale, CA 94086.

#### SEMI-CUSTOM TO FULL CUSTOM



Exar can convert your semi-custom chip to a custom IC, reducing chip size, saving money, and often providing added performance benefits.



FOR THE EVAN DEDDECENTATIVE NEADEST VOIL CALL EVAN AT (400) 700 700

# Line Printer Interface. . .

For these computers: LSI-11 PDP\*-11 PDP\*-8

■ Data General ■ Interdata

■ IBM Series/1 ■ Hewlett-Packard

To these printers:

■ Centronix ■ DEC LA180 ■ Data Printer ■ Dataproducts ■ Data 100 ■ Printronix

■ CDC ■ Tally ■ Diablo 2300

■ GE TermiNet\* ■ Houston Instruments

and other popular printers

When it comes to Line Printer interface, MDB has it:

Low-cost line printer controllers

Completely software transparent to host computers

Runs host computer diagnostics

Long-line operation features

The variety of MDB line printer controllers offers user flexibility in line printer selection with no change in host system software. Each controller is a single printed circuit board requiring one chassis slot and is complete with a standard fifteen foot cable. Just plug in the MDB module and connect your printer.

Transparent to the host computer, the MDB controller is completely compatible with diagnostics, drivers and operating systems. Operation and programming are exactly as described by the host computer manufacturer.

More than three dozen computerto-printer controller combinations are now available from MDB. In addition, printers which emulate the Centronics, Dataproducts, or Data Printer interface specifications are fully compatible with MDB line printer controllers.

A long-line parallel operation option is available for many printers permitting full speed operation up to 3000 feet.

MDB interface products always equal or exceed the host manufacturer's specifications and performance for a similar interface. MDB products are competitively priced, delivery is 14 days ARO or sooner.

MDB places an unconditional one year warranty on its controllers and tested products. Replacement boards are shipped by air within twenty-four hours of notification. Our service policy is exchange and return.

MDB also supplies other peripheral device controllers, GP logic modules, systems modules and communications/terminal modules for the computers listed above. Product literature kits are complete with pricing.



\* PDP TM Digital Equipment Corp. TermiNet TM General Electric Co.

#### **New products**

nated units are available with ranges starting at 2 to 8 pF, increasing to a maximum range of 15 to 60 pF.

Depending on temperature requirements and the dielectric selected, the trimmers can be purchased with working voltages of 100 to 350 v dc. They can withstand temperatures of  $-55^{\circ}$  to  $+125^{\circ}$ C.

Spectrum Control Inc., 8061 Avonia Rd., Fairview, Pa. 16415. Phone John Lane at (814) 474-1571 [347]

#### Front-panel LED indicator emits up to 50 mcd

The 2L7 panel indicator uses a T 1-3/4 light-emitting diode and Fresnel lens to provide an output of 50 mcd with 180° visibility. It also has a threaded body for secure mounting




and wrapped-wire posts for gas-tight connections.

The lamp is available with a red, green, or amber LED and a transparent or translucent lens of highimpact plastic. The unit has a builtin resistor to permit operation from voltages of up to 48 v. Free samples of the 2L7 indicator are available upon request.

Sloan Co., 7704 San Fernando Rd., Sun Valley, Calif. 91352. Phone (213) 875-1123 [348]

#### Performs like cermet. Costs like carbon. Stands up like steel.

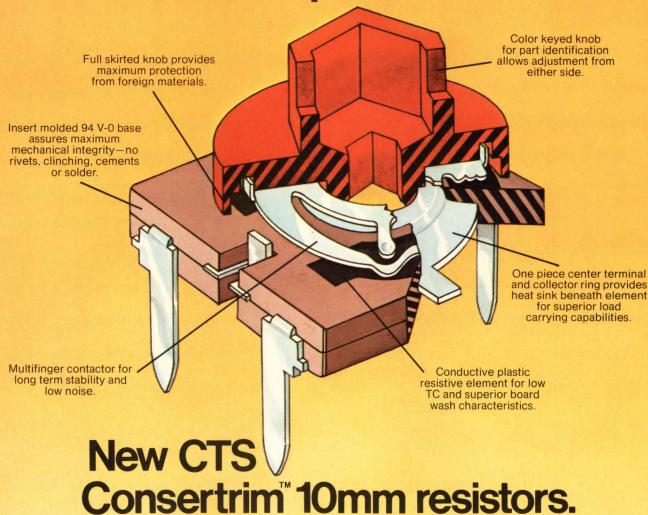

These high performance CTS trimmers feature a conductive plastic element on a UL-94 V-0 rated fire retardant, molded substrate; stability and load carrying characteristics approaching cermet; at a price close to carbon. Add to this a mechanical integrity that can withstand forces best described as brutal. Insert-molded terminations provide solid mechanical anchoring and double as an effective heat sink.

CTS series 268 Consertrim resistors are adjustable from both the top/front and bottom/rear; adjustment axis may be either parallel with, or perpendicular to, the PC board. A wide resistance range is available in a new standard of reliability and performance...with superior board wash characteristics.

Resistance Range:
500 ohms—5 megohms.
Power Rating, Watts:
½ watt @ 70°C.
TC: <400 ppm/°C typical.
Settability: 0.05%
Noise: <1% CRV initial.
Operating Temperature

Range: -55°C to +125°C.
Consertrim resistors have performance characteristics exceeding most carbonaceous trimmers, yet are competitively priced. For complete series 268 catalog literature, write or call CTS of Elkhart, Inc., 1142 West Beardsley Avenue, Elkhart, Indiana 46514. Phone: (219) 295-3575.





We've accepted of cost



Low cost...high reliability...and quick interconnection! Tough for any connector. A tougher challenge yet for demanding automotive specs. TRW Cinch engineering met the cost effective challenge with the New Cinch Plastic Polarized Subminiature Connector.

Originally designed for costconscious automotive systems, the quick PCB snap-mounting device makes the new high contact density connector a logical choice for a wide range of applications including computer peripheral equipment, test equipment and telecommunications.

Check these other outstanding Cinch features...25-pin polarized arrangement...compact all-plastic shock and vibration resistant design...interchangeable, intermatable, intermountable with all standard "D" subminiature connectors.

Meeting all of your interconnection needs is the challenge of the NEW Cinch. Just as we worked with this automotive manufacturer, we'll work with you to solve your connector problems with a highly reliable pro-

duct and prompt delivery schedule. Need a connector?

Challenge Us!

For all the facts on the Plastic
Polarized Subminiature and the full
line of Cinch connectors, contact
your local TRW Electronic Components
Sales Office...listed in EEM.
TRW Cinch Connectors,
A Division of TRW, Inc.,
1501 Morse Avenue,
Elk Grove Village, IL 60007
(312) 439-8800.



# the challenge effectiveness.

TRW CINCH CONNECTORS



## Store Recorders have made




Flick a single switch on a dual standard recorder in the new Racal Store DS range, and you've changed instantly from Intermediate Band to Wideband operation on FM. A single switch that selects either recording standard – without the need to interchange plug-in modules. A single switch changes all the signal channels (four to fourteen) on all seven speeds.

#### **FM Capability**

The Store range of instrumentation recorders, well-renowned for research in the scientific, automobile, aerospace and medical fields, now offers an FM capability over the entire band DC to 40 kHz, and up to 300 kHz on Direct Recording.


#### **Greater Flexibility**

And even greater flexibility. Switch any channel to unipolar, and the full dynamic range becomes available to either positive or negative going signals. Switch any channel to offset, and you can record a 100 mV peak-to-peak signal on a 20 V step—without losing any dynamic range.





## a quick switch to wideband.



#### **Proven Success**

All these outstanding new advantages have been added to the host of features which have made the existing range such a success—like single switch seven-speed selection, full servo operation, dual peak-indicating meters, full remote control of all functions, portability, and operation

from AC or battery power sources.

That's why, by switching to the Racal Recorders' new Store DS range, you can make a quick switch to a whole new wideband world.

Racal Recorders Limited Hardley Industrial Estate, Hythe Southampton Hampshire SO4 6ZH England Telephone: 0703-843265 Telex: 47600.

Racal Recorders Inc 5 Research Place, Rockville Maryland 20850, Telephone: (301) 948 3085.

Racal Recorders Inc,1109 West San Bernardino Road, Suite 110 Covina California 91722 Telephone: (213) 967 2869.

Racal Recorders Always on the right track







# eastman 910® adhesive is so strong, fast and easy to apply that it can be used for many small repair jobs as well as for product assembly One drop bonds rubber, plastics, metals, hardwoods and ceramics in seconds to minutes For more information, write Dick Blair, Eastman Chemical Products, Inc.,

**New products** 

Industrial

#### Converters aim at optical links

Industrial units use V-f and f-V conversion to minimize both nonlinearity and price

Purely analog and purely digital methods for transmitting analog signals over optical links each have certain advantages, but the folks at Dynamic Measurements Corp. feel that a combination of the two provides the best approach for a good many applications. Their System 5500 reflects this view. It consists of a voltage-to-frequency converter and a frequency-to-voltage converter, each of which is optimized for use in an optical communications link. Unlike conventional V-f and f-V converters, the units used in the System 5500 form a carrier-type communications system in which a zero input voltage corresponds to a 4-MHz frequency.

Signals applied to the input V-f converter modulate the 4-MHz carrier in proportion to their voltage. The frequency-modulated output pulse train from the converter would typically be applied to a light-emitting-diode driver and thence to an LED and a fiber-optic cable.

At the receiving end of the link, after the optical signal has been converted into a pulse train, the f-V converter reproduces the input analog signal with an overall system nonlinearity error of no more than 0.1% of full scale. The system, which maintains its linearity down to dc, has a 3-dB bandwidth of 500 kHz.

One of the problems with some other optical communications systems is a degradation of linearity for input signal frequencies below about 30 Hz. For users who need reliable data on static or slowly changing parameters, this may become an extremely important consideration.

An example of such an application may be found at the Princeton

University large torus experimental fusion reactor. System 5500 data links will be used there to monitor the reactor power supply's output wave shape. Rise time, flatness of the wave's top, and fall time will be closely watched, and feedback will be used to control them. "That flat top is the equivalent of dc-that's where the low-frequency performance of the 5500 comes in," says DMC national sales manager, John J. Toohey.

The V-f converter responds to changes in input voltage with a 0.1% settling time of less than 2 µs. The input voltage range of the V-f converter can be either  $-10 \mu V$  to -10 v or, through the use of an offset feature, up to  $\pm 5$  V.

Depending on the application, duplicating this performance with a digital link could get pricy, according to Toohey. "Price comparisons depend on whether your system needs high-speed continual updates or not," he says. "If you are content with serial data transmission at a reasonably slow rate, costs could be very close to ours. But if you must watch a parameter closely and continually-say, to apply feedback—in a digital system that means parallel output, multiple optical links, very fast conversion techniques, and a price that could be several times ours."

A complete System 5500, comprising a V-f converter and an f-V converter, sells for \$275 in lots of 1 to 24. Prices fall to \$206 for orders of more than 100 units. Delivery is from stock.

Dynamic Measurements Corp., Six Lowell Ave., Winchester, Mass. Phone (617) 729-7870 or toll-free (800) 225-1151 [371]

Sensor resolves 8 mils to read bar codes, patterns


Bar codes are visible on just about everything in supermarkets nowadays, and they are growing popular in other areas, too, where a rapid means of entering data into a computer is needed. Now there is a reflective sensor, the HEDS-1000,

lastics Division, Kingsport, Tennessee 37662

176 Circle 176 on reader service card

# Transients. You have to design with them in mind.

# GE-MOV II varistors. Your economical, technically sound solution.

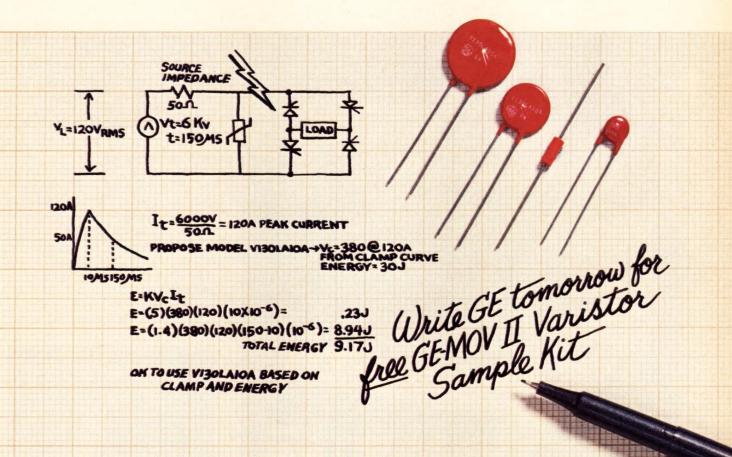

The question isn't whether or not you should design to protect expensive, voltage-sensitive components from transients. It's how to do it in the most logical, economical way.

General Electric's expanded line of GE-MOV II varistors gives you the technically sound solution. They clamp dangerous transients and dissipate them as harmless heat. Economically, too.

General Electric's full line of radial series GE-MOV II varistors now includes four new low voltage, higher energy products in 20mm disc size. Voltage offerings now range from 14-1200 dc and from 10-1000 ac. Energy ratings: .5 to 350 joules. Peak currents: 250 to 6000 amps.

For further information, call your nearest Electronic Component Sales Department. For a free

sample kit, write stating your application, current and voltage requirements to General Electric Company, West Genesee Street, Box 4B, Auburn, New York 13021.

In Europe, contact the International General Electric Company of New York, Ltd., 222-15, Dundalk, Ireland (042) 32371, telex 33816.

\*Registered Trademark of General Electric Co

There's more to GE semiconductors than meets the eye



Circle 177 on reader service card

## Find out in time...

Real time. Bit errors are more likely to occur grouped together than evenly distributed. The best way to find them is in real time. And Tau-Tron offers the only instruments available to make these significant measurements.

Error distribution analysis for communications networks, telemetry, or magnetic storage systems. With Error Analyzers by Tau-Tron. When you need to know . . . in time.



Circle 178 on reader service card



## HOPE The project a ship launched.

first there was the hospital ship S.S. HOPE, now retired. Today HOPE is an established project which has carried its goal of improving health through education to 24 developing countries of the world and the United States.

Give to:



Washington, D.C. 20007

#### **New products**

that can read such codes even if the distance between bars is as little as 8 mils. Furthermore, the entire sensor-light-emitting diode, photodetector, and precision optics-fits into a small TO-5 package of metal and glass.

The sensor, which the manufacturer states can read any color-bar code now on the market, emits a near-infrared light with a wavelength of 700 nm. The light is created by the 7-mil-diameter LED and is focused on the image plane by half of a bifurcated plastic lens; the plane can be anywhere from 150 to 190 mils from the lens to maintain the 8-mil resolution.

The other half of the lens gathers the reflected light and projects it onto the photodetector. The response rate of the photodetector depends on the rate at which charge is created by light impinging on it; hence the actual operating rate depends on the reflectivity of the image plane. For a specular surface, the unit can operate at speeds up to 1 MHz.

In addition to reading bar codes,



the HEDS-1000's resolution and operating speed suit it for other pattern-recognition applications. Industrially, they could be employed for counting, sorting, edge sensing. tachometry, and sizing, as well as for detecting surface flaws. Where space is critical, they should be particularly attractive to designers of, say, printers, plotters, and copiers. The

### CANNON. THE SOURCE.



#### Cannon KJL/KJ Connectors.

Your ITT Cannon Electric distributor has an in-store supply of Cannon KJL Series I and KJ Series II connectors for your MIL-C-38999 requirements.

High reliability connectors with superior contact stability secured by the Super Caesar™ rear release contact retention assembly.

A design variety for temperature environments from -85°F to +392°F with nine shell sizes each series. Fifty-nine contact arrangements from 3 to 128 contacts. All contacts adaptable to AWG wire sizes 16-28 and easily installed by simple and fast customer tooling to lower your total installed cost.

So when you need KJL and KJ connectors, remember the source. ITT Cannon.

For more information contact your local distributor. Or write to: Product Manager, Circular Division, ITT Cannon Electric, 666 East Dyer Road, Santa Ana, CA 92702. For 24-hour service, call toll-free (800) 854-3573; in California (800) 432-7063.

For all your Cannon connector needs see the EEM directory.

Six decades on the leading edge of interconnect technology.

CANNON ITTT

#### KJL/KJ DISTRIBUTOR LISTING

ALABAMA Hall-Mark Huntsville 205/837-8700 CALIFORNIA Kierulff

Time Electronics West Inc. 213/320-0880 Time Electronics Nor/Cal Electronics Inc. Mountain Vie Los Angeles 213/725-0325 415/965-8000

#### FLORIDA Hall-Mark

Orlando 305/855-4020 Time Electronics 305/974-4800

#### ILLINOIS Hall-Mark

Electronics Corp. Elk Grove 312/437-8808 MISSOURI Hall-Mark/ St. Louis Earth City 314/291-5350

#### NEW YORK Time Electronic

Sales Hauppauge L.I. 516/273-0100 OKLAHOMA Hall-Mark Tulsa 918/835-8485

#### PENNSYLVANIA

Time-Electronics/ Mid Atlantic Philadelphia 215/622-2500 Hall-Mark Electronics Corp. Dallas 214/231-5101

#### Hall-Mark Houston 713/781-6100

KANSAS Hall-Mark/Kansas Shawnee Mission 913/888-4747

#### MASSACHUSETTS Time Electronics/

New England New Boston Park 617/935-8080 MINNESOTA Hall-Mark/ Minnesota Bloomington 612/884-9056

#### WASHINGTON

Electronics Inc. Lukwila 206/575-4420 WISCONSIN Wisconsin West Allis 414/476-1270

# NEW, FLEXIBLE, GOULD 60 MHz SCOPE.





An Electrical/Electronics Company
Circle 180 on reader service card

The Gould OS3500 provides the latest in oscilloscope operating features. The 6 ns risetime combines with a third channel trigger view and holdoff to make the instrument ideal for the digital engineer.

- DC 60 MHz at 2mV/cm (100 MHz trigger)
- 8 cm x 10 CRT operating at 12 kV
- Composite trigger, 3rd channel trigger view and holdoff
- Alternate timebase mode displays both delayed and intensified sweeps simultaneously
- Add-on, retrofittable, DM3010 digital measuring option increases accuracy in amplitude, time and frequency measurements
- Unique two-year warranty covers all parts and labor (exclusive of fuses, calibration and minor maintenance)

For a demonstration or answers to any questions on the OS3500, call (216) 361-3315. Gould Inc., Instruments Division, 3631 Perkins Ave., Cleveland, Ohio 44114.

Call free for brochure: (800) 325-6400. In Missouri (800) 342-6600.

Save time. Save money. Eliminate loudspeakers and hand soldering with the new AT27 and AT32 Audio Transducers

They mount directly to P.C. board; are wave solderable; low current drain; provide sound pressure levels of 75 or 90dBA at 1 foot at 2.0-2.9kHz. Frequency range of 1.6-4.0kHz. A 15Vpp signal will produce 80 to 95dBA.

For literature, write Projects Unlimited, Inc., 3680 Wyse

Road, Dayton, Ohio 45414. Phone: (513) 890-1918. TWX: 810-450-2523.



# NO SPEAKERS REQUIRED WE'RE WARNING YOU.

#### **New products**

HEDS-1000 operates from a single 3.5- to 20-v supply and is priced at \$18.50 per unit for 100 or more. Delivery is from the distributor's stock.

Hewlett-Packard Co., Inquiries Manager, 1507 Page Mill Rd., Palo Alto, Calif. 94304 [373]

### Pressure transducer conditions signals

The 140PC is a solid-state pressure transducer that provides a fully conditioned output signal for absolute, differential, or gauge-pressure readings in the range from 0 to 30 psi. It offers exceptionally high repeatability and low hysteresis, according to the manufacturer, and provides readings that are stable to within 1% of the full-scale output over an 80°C range.

The 1-oz unit contains a 0.1-in. silicon chip with ion-implanted resistors that sense the flexing of an etched diaphragm at the chip's center. The resistors' outputs are amplified by thick-film circuitry that compensates for temperature-induced errors.

The 140PC is available in versions that will respond to maximum pressures of 1, 5, 15, or 30 psi. Its dc voltage output is ripple-free and



responds to input changes in 1 ms or less. A supply voltage ranging from 8 to 20 v dc, from which it will draw a maximum of 20 mA, will power the transducer.

Operable over the range from  $-55^{\circ}$  to  $+125^{\circ}$ C, the transducers sell for \$37 apiece in quantities of 500 or more.

Micro Switch Division, Honeywell Inc., 11 W.

# AROUND THE WORLD, YOU CAN COUNT ON ELECTROMASK SYSTEMS AND ELECTROMASK SERVICE.



When you build sophisticated IC maskmaking and wafer stepping systems and ship them to the far corners of the world, you better back them up with service. That's why at Electromask we have positioned five service centers in the United States, four in Great Britain and Europe, and one in the Far East.

No systems are built to be more reliable than ours. We also employ a double acceptance-test procedure—testing both before shipment and after installation. But, although no systems have a better record in the field than ours, in time any sophisticated system is going to need some service. When that time comes for your Electromask system, you can be sure that no matter where it is located—an Electromask factory-trained service specialist can be on his way immediately.

But there's more. Our service specialists are based in the field at our service centers near our major system installation concentrations. So there is one near you. And we regularly bring our service specialists back to the factory for a refresher training course. So they maintain their expertise even on our newest systems. All our service centers stock the spare parts needed to keep your system on line. As a further convenience, we have arranged for the computer consoles of our systems to be serviced by the worldwide offices of the computer manufacturer, Hewlett-Packard. So from San Jose to Tokyo, if it's an Electromask system, you've got expert and reliable service at your door.

For the full story on the Electromask one-year warranty and the optional follow-on parts-and-labor service contract, use the reader service card or contact us directly.

Electromask, Inc., a subsidiary of the TRE Corporation, 6109 De Soto Avenue, Woodland Hills, California 91367. Phone: (213) 884-5050, Telex 67-7143.





# Anritsu's wideband Selective Level Meter ML38A

Whether you use it for testing or maintenance of your systems, you can rely on this meter's outstanding stability, accuracy, and level-measuring range. Synthesized local oscillator and super wideband response (20Hz to 6.4MHz). Accuracy ±0.1dB (10kHz, +5dBm). Wide measuring range (-120 to +30dBm). Various IF filters 3.1kHz, 70Hz and 6Hz (option-01). Option-02 incorporates a self-contained flat level meter function. Option-3 provides an IEC interface bus.

#### Applications:

- Pilot level
- Test tone level
- Traffic level
- Crosstalk
- Channel noise level
- Carrier leak

For comprehensive literature on the Selective Level Meter ML38A, contact—



MEASURING INSTRUMENTS DIVISION

SALES DEPARTMENT: 10-27, Minamiazabu 5-chome, Minato-ku, Tokyo 106, Japan Phone: (03) 446-1111/Telex: 0-242-2353 Cable: ANRITDENKI TOKYO

• U.S.A. Anritsu America, Inc. Tel: (201) 569-4474 • West Germany Knott Elektronik GmbH Tel: (08178) 4085 • U.K. Dymar Electronics Limited Tel: Watford 37321 • France Tekelec Airtronic Tel: (1) 946-96-48 • Italy Vianello S.p.A. Tel: (02) 54 40 41 • Spain Unitronics, S.A. Tel: 242 52 04 • Holland C.N. Rood B.V. Tel: 070-99 63 60 • Belgium C.N. Rood S.A. Tel: 02-35 21 35 • Sweden Teleinstrument AB Tel: 08-38 03 70 • Singapore O'Connor's (Pte.) Ltd. Tel: 637944 • Australia NEC Australia Pty. Ltd. Tel: Melbourne 560-5233 • Malaysia O'Connor's (Malaysia) SDN. BHD. Tel: 51563/5 • Brazil Anritsu Eletrônica Comércio Ltda. Tel: Rio 221-6086

#### **Probing the news**

Spring St., Freeport, III. 61032. Phone (815) 235-6600 [374]

### System measures movement with LEDs and cameras

A noncontact system for measuring the coordinates of multiple points, the Selspot optoelectronic movement-monitoring system uses a highly linear photodetector that is sensitive to the position of light-emitting diodes attached to the object under study.

Up to 30 infrared LEDs can be attached to the subject. Their light is focused by a 50-mm 1:0.95 lens system into the camera containing the photodetector. Two cameras may be used to monitor movement in three directions, and the system is capable of making up to 10,000 readings per second.


Signals from the camera are



processed by a main unit that provides both computer- and oscilloscope-compatible outputs. Options include an external power supply and a four-camera multiplexer unit. Selective Electronics Inc., Dept. P-D, P. O. Box 100, Valdese, N. C. 28690. Phone Rolf Svensson at (704) 874-2289 [376]

### Sensors note excessive rise or fall in liquid or gas flow

The FS-920 series is composed of flow switches designed to detect excessive or insufficient flow in liquid or gas systems. Units are available in two versions: one which can be set to activate at a point in the range from 0.1 to 1.5 gal/min and another settable in the range

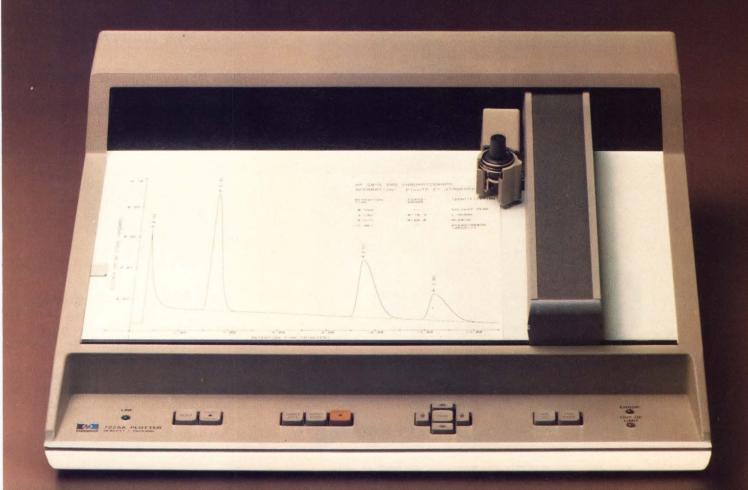

# Now OEM's can draw high quality graphics even when the bottom line is price.

Graphics gives you the best way to analyze and communicate data. But cost has been keeping it out of the picture for many OEM systems. That's why Hewlett-Packard is offering the new Model 7225A Graphics Plotter.

The price: \$1750 (domestic USA price with 17602A)

The price: \$1750 (domestic USA price with 17602A general purpose "personality" module), in quantities of five. With further OEM discounts from there.



Plug-in "personality modules" customize the plotter for you.

HP's versatile 7225A converts the output of processor based systems into high quality charts and graphs in any size up to 8½ x 11" (A4). A wide selection of plug-in "personality modules" lets you adapt the plotter to suit your needs. Different modules determine interface hardware, language, and capabilities such as internal character sets, axis generation, labeling and scaling.

Simple linear stepping motors eliminate many mov-

Simple linear stepping motors eliminate many moving parts to assure reliability. Visually smooth, high resolution ink lines of any length and angle are generated, requiring only end point data.


And you give your customers the confidence of Hewlett-Packard's worldwide service network.

So if you want high quality graphics but you draw the line at price, look into the Model 7225A Graphics Plotter. For a detailed 24-page OEM brochure, contact Hal Phillips at Hewlett-Packard, 16399 West Bernardo Drive, San Diego, CA 92127; [714] 487-4100.



1501 Page Mill Road, Palo Alto, California 94304 For assistance call: Washington (301) 948-6370, Chicago (312) 255-9800, Atlanta (404) 955-1500, Los Angeles (213) 877-1282

Circle 183 on reader service card

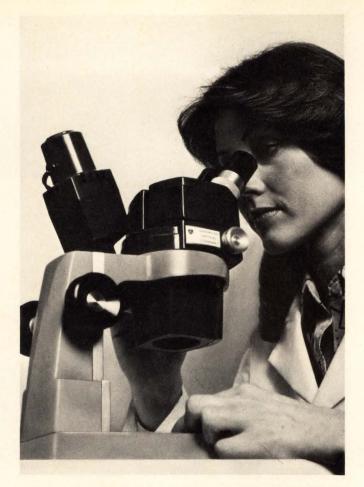

# AO STEREOSTAR® Microscope. It has everything from A to Zoom.

ALL ESSENTIAL FEATURES FOR AN OUTSTANDING INDUSTRIAL MICROSCOPE

Auxiliary Lenses: .5x, 2x Body Rotation: 360°

Eyepieces: 10x, 15x, 25x Field Size Range (inches): .13-2.25

Magnification: Standard 7-30x; Range 3.5-150x

**UL listed Illuminator** 

Working Distance: Standard, 4.0 inches; Range, 1.4-5.7 inches Zoom Range: .7-3x; Zoom Control: Dual Side Mounted; Zoom Ratio: 4.3-1

These are all features you want and need for efficient assembly or inspection of microcomponents. The AO STEREOSTAR ZOOM Microscope was specifically designed for production-line applications. It's easy to use, with plenty of working distance plus coupled zoom control conveniently located on both sides. And traditional AO quality optics give very high resolution for crisp, sharp images. Send for a detailed brochure. American Optical, Scientific Instrument Division, Buffalo, NY 14215.



#### **New products**

from 50 to 300 cubic centimeters/min. The units are set at the factory according to the purchaser's design specifications.



The flow switches are constructed of corrosion-resistant materials and contain single-pole double-throw switches that are hermetically isolated from the substance being monitored. They can withstand pressures up to 1,000 psi and are resistant to shock and vibration. Typical applications for them are in the protection of bearings from loss of lubricant and in low-flow proportioning systems where loss of additive would ruin the end product.

Transamerica Delaval Inc., Gems Sensor Division, Farmington, Conn. 06032. Phone (203) 677-1311 [377]

### Small sealed switch senses slight motion

A hermetically sealed switch designed to sense motion, the TS7K measures less than 0.3 in. in diameter and is 0.35 in. long. Inside is a ball of mercury that is free to move on a specially treated surface. A slight movement of the switch will cause a momentary change in the state of the switch's normally closed or normally open contacts. With a latching circuit, this change can be used to set off an external alarm.

The TS7K is rated for loads as high as 0.5 A at 115 V ac and, at its most sensitive setting, can detect the tap of a finger on a wooden table. In quantities of 1,000 or more, the switch sells for under \$1. Delivery is from stock.

Fifth Dimension Inc., 707 Alexander Rd., Princeton, N.J. 08540. Phone Bill Kinney at (609) 452-1200 [378]

# Data Integrity Control with just one chip.

Signetics' new 2653 brings you Bisync in firmware...fast!

Here's high-speed intelligence to distinguish control characters from data. All on one chip. Our new 2653 data integrity controller. Since it supports transparency, the 2653 tells you when DLE is not DLE. So your CPU can do other work.


Fully programmable, it packs a 128-character-class RAM for complete format control. And that makes it easy to tell the difference between control and data characters—in EBCDIC, ASCII or six-bit codes.

Riding atop your microprocessor's data bus, the 2653 speeds data checking with throughput of 4 million bits/second. It

also shrinks design time while it cuts development costs. Use it and save a half-board of standard logic plus about 100 lines of programming.

Need high-speed error detection via CRC? It's a breeze with the 2653—the only IC that computes and checks CRC intelligently and in parallel.


This versatile part simplifies error checking and detection in almost any mode: block-check,



Add it to your USRT/USART. Or couple it with our 2651/2661 communications interface or 2652 multi-protocol circuit. The result: Bisync with minimal software intervention.

So when your design calls for data transfer, even within magnetic media controllers, specify our one-chip simplifier. Write us today.

Or contact your nearby Signetics sales office or authorized distributor for full information.





a subsidiary of U.S. Philips Corporation

Signetics Corporation P.O. Box 9052 811 East Arques Avenue Sunnyvale, California 94086 Telephone 408/739-7700

Name	Title	E621
Company	Division	
Address		MS
City	State	Zip

# Analog LSI testing

# Giving an Eye to Laser Trimming.

Today's monolithic devices demand a new order of speed and accuracy throughout the entire test routine, and nowhere is that more evident than in the laser trimming operation.

Here, increasing circuit densities and the growing number of capabilities assigned to individual dice have raised trimming to the status of a highly skilled art.

However, the growth of analog LSI applications has been accelerating, pushing production demands higher and higher. And this means that trimming has become an expensive bottleneck.

There are really two tricks to removing that bottleneck. One is to find a laser trimmer with the precise positioning accuracy, the small spot size, the speed and reliability to operate on complex analog LSI devices with minimum human involvement.

The other trick is to obtain that kind of trim capability integrated into a high-volume analog LSI test system. For only in such a trim/test combination can those superior trim specifications be put to their most effective use.

eradyne, a pioneer in monolithic trimming and the acknowledged leader in linear test

equipment, recognized early on the need for combining both trim and test functions in the same system. The result of that leadership and concern, the Monolithic Adjust systems in our new A300 Analog LSI Test/Trim family, are the semiconductor industry's first systems expressly designed for monolithic trimming and testing.

Among the A300's most critical innovations is the *LASER EYE*. An automatic edge sensing capability that seeks out the location of resistors and other elements, the *LASER EYE* positions the beam regardless of wafer orientation, with an accuracy better than 2.5 micrometers, relative to circuit features.

Additionally, the LASER EYE allows resolution down to 1 micrometer, and system optics permit beam waists of 6 micrometers.

are a fast, highly reliable galvanometer beam positioner, a YAG laser with excellent pulse-to-pulse stability, and an air-cushioned Sawyer-motor step-and-repeat handler that solves the problems of wafer warp and thickness variation.

Excellent predictability in these components, coupled with Teradyne's traditionally high vibration immunity, has produced a stable and reliable system, easily and quickly verified by glass grid auto-calibration, traceable to NBS. The end result of all that reliable accuracy is a uniformity of trimming, from wafer to wafer and from trimmer to trimmer, that is truly unprecedented.

If you would like more information on the A300 Analog LSI Test/Trim Systems, write Teradyne, 183 Essex Street, Boston, MA 02111.





## leads the way in hybrid data conversion.

As a pioneer in hybrid technology with over 16 years of data conversion experience, DDC has the circuit design and manufacturing capability to meet your most advanced hybrid data converter requirements.

In synchro and resolver converters, DDC has the only line of hybrids available anywhere. And in A/D, D/A converters, DDC has a broad line of the most advanced hybrids. For custom requirements, DDC has complete capability, from circuit design through fabrication and testing, to produce fully qualified hybrids to meet your specifications.

All DDC hybrids are processed to MIL-STD-883B and MIL-M-38510D, so they're suited trial applications.

To learn more about how DDC's engineering organization and hybrid capability can help you, contact us today. Our applications engineers are prepared to discuss your requirements in detail.

#### A Wholly Owned Subsidiary of ILC Industries, Inc.

Airport International Plaza, Bohemia, New York 11716 516-567-5600, TWX 510-228-7324

ILC Dover - Sole designer and manufacturer of Apollo and Shuttle space suits.

Circle 187 on reader service card



# Micro Proximity Keyboard




#### "THE DISHWASHER SAFE PLASTIC BRICK"

Full electronic keyboard, 128 ASCII output codes; 8 bit plus strobe, TTL compatible (or CMOS with pull-ups); connect directly to the data bus. Designed for large scale manufacturing and priced accordingly.

Available off-the-shelf in this standard evaluation configuration, this totally new solid state keyboard can be easily customized by TASA to your requirements.

If you haven't yet evaluated our micro proximity control technology for your application, you may be four months behind your competition.



#### ORDER ONE NOW

Evaluation units, \$80 each (prepaid UPS) plus appropriate sales tax for California residents; optional stand (as shown), \$15. Master Charge or Visa accepted on phone or mail orders (include number and expiration date).



Touch Activated Switch Arrays, Inc. 2346 Walsh Avenue, Santa Clara, CA 95050, (408) 247-2301 TWX 910-338-7620

When you need rockers & toggles or more than rockers & toggles.



Come to the people who've always been specialists in having more good ways to solve problems: Dialight. What we've done in indicator lights, illuminated switches, readouts and LEDs, we're doing now in miniature rockers and toggles.

This new Dialight family of switches, which comes in a full range of sizes is, we're proud to point out, all-American made.

When you consider all the configurations of styles, sizes, life and safety ratings, colors and mountings, you'll find there are literally hundreds of thousands of design combinations. Such a number of possibilities

can in itself be a problem, except that the new Dialight catalog is specifically designed to prevent confusion and help you quickly and easily find the most advantageous combination of features for your applications.

If you'd like to see what Dialight quality rockers and toggles can do for the looks, durability and economics of your products, contact us today for the Dialight "Meets Your Need" Book. Your free copy

will include a list of stocking distributors in the U.S. and Canada.


A North American Philips Company

Made in the U.S.A. by DIALIGHT

# Dialight meets your needs.

TEKTRONIX
thinks your logic analyzer
should be as versatile
as you are

So ours let you sample with speed. With resolution. With confidence.

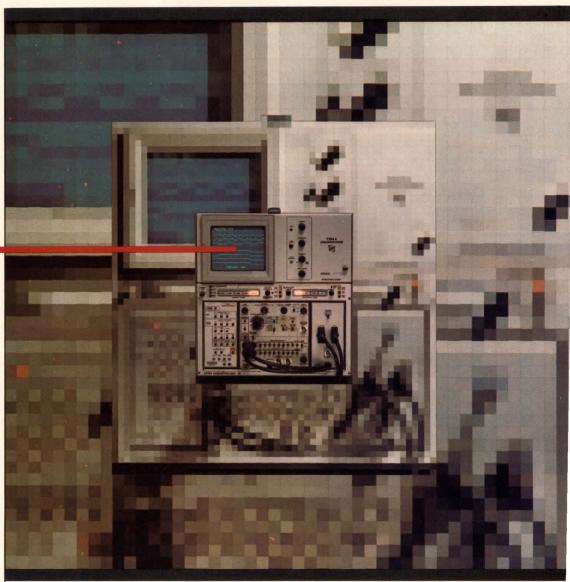

Sample with confidence: up to 100 MHZ at 15 ns resolution

Versatility — it's the key to effective, efficient digital design. You've got to be versatile enough to make a variety of measurements every day. And so you need an equally versatile logic analyzer.

Speed is one important measure of logic analyzer versatility, because, especially in asynchronous measurements (say, chip to chip transactions), faster is better. Better because high speed means high resolution. And you've got to see information accurately in order to measure it accurately.

Use Tektronix Logic Analyzers for asynchronous measurements at 20, 50, even 100 MHz — with 15 ns resolution. You can also sample synchronously up to 50 MHz (not all logic analyzers provide synchronous and asynchronous operation).

Tektronix speed and resolution mean confidence. In the measurements you make...and in the job you do. High speed data acquisition: it helps make our Logic Analyzers versatile. So you

can do today's job and to-

morrow's. So you can change applications without changing your logic analyzer.

Contact Tektronix Inc., P.O. Box 500, Beaverton, OR 97077. In Europe, Tektronix Ltd., P.O. Box 36, St. Peter Port, Guernsey, Channel Islands.

For immediate action, dial our toll free automatic answering service 1-800-547-1512

**Tektronix** 

#### **New products**

Microcomputers & systems

#### Software meshes two ICE units

Package makes multiprocessing systems easier to build and repair

Multiprocessing, the use of more than one computer to solve a problem, is recognized as a key for unlocking powerful system capabilities. And microprocessors, with their small size and low cost, make this prospect all the more attractive.

There are reasons why multiprocessing is not practiced more often, however. Difficult as it is to design such a system, it is even more arduous to develop and test the hardware and software, mainly because of inadequate tools. The application of in-circuit emulation to a twomicroprocessor system, for example, has forced designers to employ two independent development systems. This not only fragments the development process, it makes fault isolation, diagnosis, and repair a real hurdle-especially when programs must be intertwined for real-time execution.

In contrast, Intel Corp.'s Multi-ICE software package enables a single Intellec development system to control and coordinate the operations of two in-circuit emulators (ICEs). The two cooperating ICE subsystems suffice for most systems containing multiple microcomputers. Multi-ICE at present allows the concurrent use of two ICE-85 units or an ICE-85 and the new ICE-49 unit. ICE-85 is for designs based on the 8085 microprocessor, while ICE-49 will emulate the 8049, 8048, 8748, 8039, 8035, and 8021 singlechip microcomputers. Other combinations of chips will be supported at a later date.

Multi-ICE uses an interactive language, with commands in English, to provide a common syntax for the in-circuit emulators. Within this simplified framework, macro commands, and assembly-language displays, as well as symbolic and other advanced debugging techniques, are easily accommodated.

Three processes—one host and two ICE processes—are executed by the Multi-ICE package to create a software interface between user and system. The user communicates with the host process at the Intellec console to create execution lists for all three processes. Commands can also originate from diskette files. Overall coordination is managed by a dispatcher software subsystem, which determines the sequence in which tasks should be performed to carry out the commands. Software synchronization is also provided to start and stop the two in-circuit emulators.

Multi-ICE is available on singleand double-density diskettes for the Intellec MDS-800 and Series II model 220 and model 230 development systems. The package can also be used to upgrade earlier Intellec systems if they are equipped with peripheral diskettes. The software runs under the ISIS-II diskette operating system and costs \$1,750. Deliveries of both the ICE-85/ICE-85 and ICE-85/ICE-49 versions will begin this month.

Intel Corp., 3065 Bowers Ave., Santa Clara, Calif. 95051. Phone (408) 987-8080 [391]

#### Executive program orders system operation to events

Controlling an industrial process is like juggling with elephants-not only is it hard work, but if your timing is off you're in big trouble. So now that microprocessors are getting into the act, Systems & Software Inc. has designed an executive program for the 8080, 8085, and Z80 that is sensitive to the requirements of real-time interrupt processing, one that is driven by events.

Called the REDX-80, the program's fundamental units are userdefined tasks. Up to 16 tasks can share the operating system's resources at one time. Each task is




For all the facts, call (408) 732-2400, ext. 2325.

#### Advanced Micro Devices

901 Thompson Place Sunnyvale, CA 94086 Telephone: (408) 732-2400

# Electronics Magazine Books Offers You:

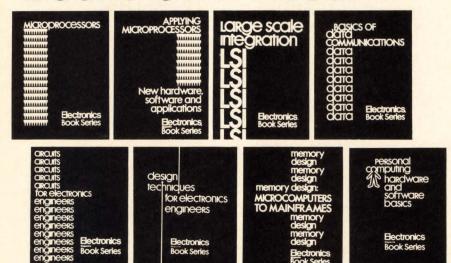

- 1. Microprocessors What you must know about available microprocessor technology, devices, information, 4th printing. \$8.95
- 2. Applying Microprocessors 2nd and 3rd generation technology. 26 detailed applications from data networks to video games. \$9.95
- 3. Large Scale Integration Covers the basic technology, new LSI devices, LSI testing procedures, plus system design and applications. \$9.95
- 4. Basics of Data Communications Includes 47 articles from Data Communications magazine covering more than 11 key areas. \$12.95
- 5. Circuits for Electronics Engineers Contains 306 circuits arranged by 51 functions from Amplifiers to Voltage Regulating Circuits. Saves design drudgery. \$15.95
- 6. Design Techniques for Electronics Engineers Nearly 300 articles drawn from "Engineer's Notebook." A storehouse of design problem solutions. \$15.95
- 7. Memory Design: Microcomputers to Mainframes The technology, devices, and applications that link memory components and system design. \$12.95
- 8. Personal Computing: Hardware and Software Basics More than 50 articles from leading publications, including specifications, helpful hints, subject index. \$11.95

Electronics Magazine Books P.O. I must be fully satisfied or you will returned after ten-day trial examinat	refund full payment if the book is	AK.
copies of 1. Microprocessor	s @ \$8.95	
copies of 2. Applying Micro	processors @ \$9.95	
copies of 3. Large Scale Inte	egration @ \$9.95	
copies of 4. Basics of Data	Communications @ \$12.95	
copies of 5. Circuits for Elec	tronics Engineers @ \$15.95	
copies of 6. Design Techniq		
copies of 7. Memory Design		
copies of 8. Personal Comp	uting: Hardware and Software Bas	sics @ \$11.95
Discounts of 40% on orders of 10 or	more of each book.	
☐ Payment enclosed ☐ Bill firm	Bill me	
Charge to my credit card:		
American Express Diners Master		
Acct. No.	Date Exp	
On Master Charge only, first numbers above name		
Name		Title
Company		
Street		
City	State	Zip
Signature		

#### **New products**

assigned a two-character name and a priority level that covers the range from a low of 0 to the highest, 7.

The tasks are activated or suspended by stimuli called events, which are task-associated operations such as intertask communications using software channels, interrupt input/output processing through hardware channels, or time-relevant requests.

Each task can identify up to 16 events associated with it using flags, allowing such events to proceed concurrently and asynchronously with it. The tasks can be resynchronized with the events by making them wait for the event flag. Because of this scheme, the processing of the task and its use of system resources can be based on the actual processing requirements of the controlled system, as reflected in the priority structure developed by the user.

Separate versions are provided for use with Z80-based systems and those using 8080 or 8085 devices. Both are available in either ISIS-II relocatable object format or in RT-11/RSX-11M, and other formats can be provided upon request. The package contains the REDX-80 system module in object or source form and a macro library that contains the system directives for using the utility as well as assembly-time directives for building tasks. Also included in the package are a reference manual and application notes.

The single-use, nonexclusive license fee for the package is \$1,500 and the source code may be purchased for a one-time charge of \$7,500. A fee of \$1,500 purchases a one-year update service, and training in the operation and application of the REDX-80 executive program is also available.

Systems & Software Inc., 2801 Finley Rd., Suite 101, Downers Grove, Ill. 60515. Phone (312) 932-9320 [393]

### Single boards link LSI and PDP computers

Coupling computers to increase processing power, long the province of



POLYURETHANE POTTING, ENCAPSULATING AND CASTING COMPOUNDS

# CONAP

constraints and lower costs in urethanes that cure without voids. Series 2500 Systems are offered in a variety of filled and unfilled formulations to meet virtually any requirement for the potting or encapsulating of modules, strain-sensitive components, coils, transformers, and similar devices. The two liquid components of the Conathane Systems mix readily and change to solids with very low exotherm. Working life is excellent and vapor pressure low. Cure is at room or elevated temperatures. And the resulting solid polymers vary from soft elastomers with a Shore A hardness of 70 to tough and rigid plastics.

#### **CHECK THESE OUTSTANDING PROPERTIES**

Non-MOCA\* curing systems
 Non-TDI prepolymers — for minimum health hazard to personnel
 Low stress buildup on sensitive embedded components
 Superior thermal shock resistance
 Excellent dielectric properties
 Reversion resistance
 Low water absorption
 Low shrinkage
 Excellent hydrolitic stability
 Dimensional and heat stability

FOR FLAME RESISTANCE choose the Conathane EN-2540 Series, a new family of filled polyurethane resins specially formulated for general purpose electrical/electronic potting, casting and encapsulating. Provides flame resistance ratings of 94V-0 when tested in accordance with UL-94. Because of fast gelation and cure at low temperatures, is ideal for high volume production.


**GET MORE FACTS.** Write for Selector Bulletin P-133 on Conathane 2500 Series, or Bulletin P-137 on flame resistant Conathane EN-2540 Series.

\* DuPont Trademark

# CONAP

CONAP, INC. / OLEAN, N.Y. 14760 / 716-372-9650

# MEET THEGANG!

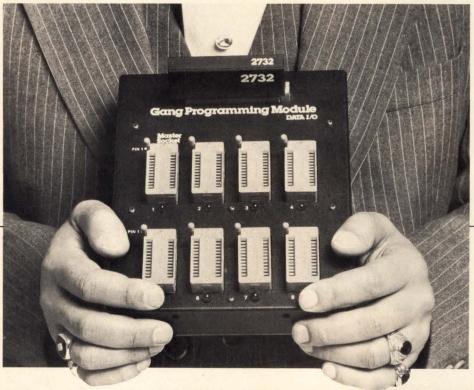

### Data I/O's new gang module programs eight NMOS EPROMS at once! (Now that's an offer you can't refuse.)

Our new Gang Module fits neatly into the Data I/O System 19 and System 17 to give you production programming capability at surprisingly low cost.

With the Data I/O Gang Module you can program all 2704, 2708, 2716 (both 1V and 3V), 2732, 2758, 2508, 2516 and 2532 devices. But instead of changing the entire module everytime you program a different device, you simply change the device "characterizer." Seven characterizers are available for the Gang Module.

Worry free programming. Before any devices are programmed, the module conducts a blank check and an illegal bit check. After programming, the unit verifies the data in each device against the data in the RAM. If any test

fails, the LED below the affected device lights up.

And with the Data I/O gang module, you can verify the data in all eight devices at once after burn in—an advantage not available on some programmers.

No matter what your production needs, talk to Data I/O. Besides our new Gang Module, we offer the unique Model 16—a sophisticated, high production unit for MOS devices.


You haven't shopped around until you've looked at Data I/O. Let us show you the difference. Circle the reader service number or contact Data I/O, P.O. Box 308, Issaquah, WA 98027. For answers fast, call toll free: 800-426-9016.

Good idea!

DATA IO

Programming systems for tomorrow...today

#### **New products**



mainframe users, is now possible for owners of LSI-11 or PDP-11 microcomputers. The Interlink/LSI provides a direct-memory-access interface and a Q-bus link to permit systems up to 50 ft apart to transfer data at the maximum Q-bus rate.

The quad-width board is transparent to software and takes up only one space in an LSI-11. It can also be used in conjunction with an Interlink/UNI to attach an LSI-11 to other models of the PDP-11 series. The Interlink/UNI is a hex-width board with similar capabilities that fits into a single PDP-11 slot. It can be used with other PDP-11 systems to provide data transfers at rates up to 500,000 words per second.

The Interlink/LSI and the Interlink/UNI are priced at \$795 and \$1,500 respectively. Both boards are available from stock.

Able Computer, 1751 Langley Ave., Irvine, Calif. Phone (714) 979-7030 [394]

### Board gets Z80 systems and IEEE-488 bus together

The GPIB board fits into any MCZ or PDS card cage, providing Z80-based microcomputers with an interface to the IEEE-488 instrument bus. The board, which contains its own Z80, can let the system act as a bus controller or provide it with talker or listener capabilities. Furthermore, the board can be used to provide any instrument with IEEE-488 compatibility.

In addition to the Z80 processor, the board contains 2 kilobytes of erasable programmable read-only



Circle 195 on reader service card

# 98 ways to save some embarrassment.

You need enclosures for a new system. You explain everything to your local source. Their prototypes miss the mark. You explain again. Hope it works. If not, embarrassment will be the least of your worries.

There's a better way. Bud. To the point, our 98 sales representatives. They will give you experienced guidance on what standard Bud enclosure will house your system. Advise you on new products, for example, seethru plexiglass doors for upright racks. Counsel you on how Bud accessories help make systems even more effective.

Get the name of your Bud sales representative and get some correct advice for a change. Bud Industries, Inc., 4605 E. 355th St., Willoughby, Ohio 44094. Phone: 216/946-3200. Bud West, Inc., 3838 N. 36th Ave., Phoenix, Arizona 85019. Phone: 602/269-3151.



Write for clear-cut facts on the new Bud plexiglass doors.

Dependability. **515** 

ISCH & LOMB

When your quality control depends on precision, convenience, or reliability—think StereoZoom® microscope quality.

Since BAUSCH & LOMB introduced the first zooming microscopes in 1959, more people all over the world have put StereoZoom® microscopes to work for them than any other instruments of their kind.

The reasons all relate to BAUSCH & LOMB quality. Optimum balance of resolution and depth of field. precision optics, highly reliable mechanical components, precise photomicrographic exposure capabilities and a wide variety of illuminators, stands, and accessories are just a few of those reasons.

**BAUSCH&LOMB** Stereo Zoom

From industrial research to routine failure analyses and wafer inspections, there is a BAUSCH & LOMB StereoZoom microscope precisely right for your application. Write or call for a detailed catalog or demonstration. THINK BAUSCH & LOMB .. Quality since 1874.



**BAUSCH & LOMB** (

Scientific Optical Products Division

Rochester, New York 14602 USA 716-338-6000, TWX 510-253-6189 TELEX 97-8231, CABLE: Bausch & Lomb

In CANADA: Bausch & Lomb Canada Ltd. 2001 Leslie Street Don Mills, M3B2M3, Ontario, Canada (416) 447-9101

Circle 196 on reader service card

# O line color as fast as you can say Ramtek.

Here's a 1000 line color monitor with a pixel rise time of 7 nsec and off-the-shelf delivery. Nobody but Ramtek can deliver that kind of speed.

Ramtek delivers more, too. Compare our color monitors with any other high performance color monitor. Point for point, you'll see there is only one choice-Ramtek, the world's largest supplier of



	Ramtek	Aydin	SRL
Diagonal Screen Size	19" and 13"	19"	19"
Compatible Monochrome Monitor	Yes	No	No
Power Supply	Internal	Internal	External 75# 19" w 20¾" d 8¾" h
Input Power Required	250 VA	250 VA	500 watts
RGB Video Bandwidth	50Hz to 40	50Hz to 25	50Hz to 43
	MHz +1/—3db with DC restoration	MHz +2db	MHz +2db
Composite Sync Separate Horizontal	Yes	Yes	No
and Vertical Drive	Optional	No	Standard
Pixel Fall/Rise Time	7 nsec	30 nsec	12 nsec (TTL only)
Physical Size (Rackmount)	85#	100#	75#
	19" w	19" w	19" w
	20" d	21½" d	22" d
	17½" h	17½" h	17½" h

1000 line color monitors.

Consult Yellow Pages under "Microscopes"

Then, give us a call. For high resolution color or b/w monitors. For immediate delivery. Or, for a color graphics and imaging display generator that opens a new world of color graphics possibilities, ask about our new high performance Ramtek 9400 Series. Whatever you need in color graphics displays, Ramtek can show you more.

585 N. Mary Avenue, Sunnyvale, CA 94086 Tel. (408) 735-8400.

REGIONAL OFFICES:

Sunnyvale, California (408) 735-8400 Newport Beach, California (714) 979-5351 Dallas, Texas (214) 422-2200 • Maitland, Florida (305) 645-0780 • Huntsville, Alabama (205) 837-7000 • Chicago, Illinois (312) 956-8265 Cleveland, Ohio (216) 464-4053 • Washington, D.C. (301) 656-0350 • Metropolitan N.Y. (201) 238-2090 • Boston, Massachusetts (617) 862-7720 • West Germany (0611) 771070

#### **New products**

memory and 1 kilobyte of randomaccess memory. The on-board buffers allow it to handle protocol requirements without interruption of the main system.

Miller Communications Systems Ltd., P. O. Box 13220, Kanata, Ontario, Canada K2K 1X4. Phone (613) 592-3020 [395]

#### Emulator for 8001/8002A MDL supports 1802 processor

Designers of systems that will go into harsh environments often turn to the 1802 microprocessor to provide the reliability they need. Now they can turn to the 8001/8002A Microprocessor Development Lab to support generation of those systems, thanks to a new emulator package.

The package contains the 1802 assembler software, emulator, and prototype control probe. With it, users can support complete program development and debugging, hardware and software integration, and real-time emulation in the prototype system. A package for the 8002A MDL is priced at \$3,750 and will be available in August.

Tektronix Inc., Logic Development Products, P. O. Box 500, Beaverton, Or. 97077. Phone Ted Gary at (800) 547-1512 [397]

### Personal business computer sells for under \$5,000

The personal computer, once aimed at the home, is now finding a new home in small businesses. Such a computer is the Apple II Business System, which automates general ledger and accounts payable and receivable functions for companies with annual sales of under \$1 million. The complete system with software is priced at \$4,995.

The system's hardware consists of the recently introduced Apple II Plus computer with 48 kilobytes of random-access memory, two floppy disk drives, a video monitor, and a printer. Built into the computer is an auto-start read-only memory chip that provides automatic disk loading

# LRC offers a new 100-million character head!



Our dot-matrix printer now features a head that has a life of 100 million characters, can print continuously without overheating, and has a character duty cycle of 50 characters/second (continuous at 50°C).

If you already own LRC printers, you'll be glad to know that the new head is compatible with existing units. If you're looking to buy, it's a good reason to look harder. Some other good reasons to consider LRC dot-matrix printers: Large, easy-to-read characters; 40 col. capacity (12 char./in.); 2-copy capability; variable font and density capability; several standard control chips available; ticket printer versions available; and more.

Developed and manufactured by: LRC, INC. Riverton, Wyoming 82501 • (307) 856-4821 • TWX: 910-949-4864

ty ability; capability; chips available; ilable; and more.

SEND FOR CATALOG


Circle 197 on reader service card

# 28 to finish off a system.

You need handles right now. But the people who make your enclosures don't handle handles. So things come to a halt.

There's a better way. Bud. We have handles, 28 types. Including eight new designs. Good looking handles. Two, in fact, have a handsome black trim. All are clear anodized aluminum. Your Bud distributor stocks handles, plus casters, levelers, rubber feet, power outlet strips and bails.


One reason we're the industry leader is we pay attention to details, like handles and hardware. For a change, get what you want from one source. Bud Industries, Inc., 4605 E. 355th St., Willoughby, Ohio 44094, (216) 946-3200. Bud West, Inc., 3838 N. 36th Ave., Phoenix, Arizona 85019, (602) 272-0441.



Eight new handles from Bud. For facts on handles and hardware, contact us.

One source. BIB

# Have it your way

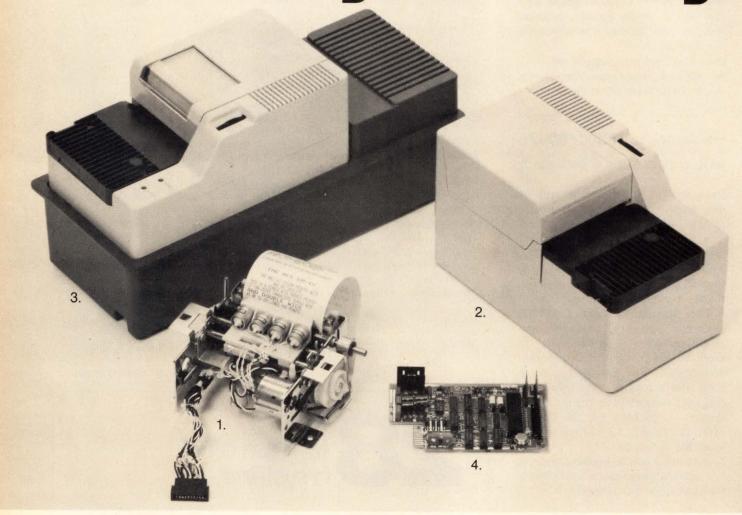

# The only 40 column printer with NCR reliability now available almost any way you want it.

- DIET SPECIAL Mechanism only (low cost, field proven, available in quantity) add your own electronics.
- 2. TO GO—Cabinetized Version—comes in a handsome, well finished, gray case, for only a little extra lettuce.
- BIG MECH Mechanism (in a finished case) with its own power supply, with or without NCR electronics, packaged as a complete unit.
- ON THE SIDE—NCR driven electronics, available with any selection.

For delivery information, prices, or literature, please contact:
NCR Engineering and Manufacturing
OEM Marketing
P.O. Box 627, Ithaca, New York 14850
(607) 273-6066.

Compare our ingredients and note the extra value of every unit served. • Works as printer and/or plotter



- Works as printer and/or plotter because of unique single wire design
- Multiple copy capability
- Prints up to 120 lines per minute
- Disposable ribbon cassette is operator changeable
- No messy spools or tricky threading

NCR

Engineering and Manufacturing — Ithaca

"Have it your way" is a reg. T.M. of Burger King Corporation, Miami, Florida, and is used with permission.

#### **New products**



when the system is turned on.

The high-level language it uses is a version of Basic expanded for solving business problems. Packaged with the system is The Controller, software consisting of three program modules: general ledger, accounts receivable, and accounts payable.

The general ledger module maintains a file of up to 250 types of accounts with up to \$99 million in any one. Up to 1,000 entries can be made monthly. The accounts receivable module keeps files of up to 250 customers and will process up to 1,000 invoice statements of \$99,000 maximum. The accounts payable subprogram keeps tabs on 100 vendors and can accept 300 monthly invoices for up to \$99,000. The software will generate reports, mailing lists, invoices, and checks.

Apple Computer Inc., 10260 Bandley Dr., Cupertino, Calif. 95051. Phone Jean Richardson at (408) 996-1010 [398]

### Triple-output power supplies tailored to microprocessors

Designed to support microprocessor applications, four additions to the RS/RT series of power supplies feature main and secondary 5-V outputs and a 12- or 15-V output. The 150-W models sell for \$415 in quantities of one to nine and the 300-W versions are priced at \$525 in the same quantity. Delivery is from stock.

Acdc Electronics Division, Emerson Electric Co., 401 Jones Rd., Oceanside, Calif. 92054. Phone Chris Edman at (714) 757-1880 [399]

#### PKW-5000 Z-80/Portable EPROM Programmer

World's Most Powerful EPROM Programmer With Built-in Power Supply.




7-2-8, Nishi-Shinjuku, Shinjuku-ku, Tokyo, 160 Japan Telephone: (03) 363-6649 Telex: J28497 Circle 199 on reader service card

# more way to house your new ideas.

If you're dealing with a source who can make an enclosure, but haven't the capability to design one, there's a better way. Bud.

We're the ones with ideas. The new designs. For example, The Horizon. An enclosure developed for housing micro processor systems and micro computers. Yet, designed as well to provide a range of options for housing PC boards, mother boards, connectors, power supplies, plug-in modules and other chassis-mounted components...unlimited applications.

We understand the electronics industry. Respond to its needs. Your needs. Today's and tomorrow's. Bud Industries, Inc., 4605 E. 355th St., Willoughby, Ohio 44094, (216) 946-3200. Bud West, Inc., 3838 N. 36th Ave., Phoenix, Arizona 85019, (602) 269-3151.



The new Horizon cabinet is now in stock. For full facts, contact Bud.

New ideas. BUB

# Best by test after test.

You're doubly sure of quality with twice tested Buss fuses.

This small dimension glass tube fuse may look good to you. And to us. But looks aren't enough at Bussmann.

That's why Bussmann quality control involves more than a quick visual inspection. Or testing a random sample from our production line.

Instead, Bussmann tests every one of these fuses twice. Once for resistance, to measure electrical performance. Then again for dimensions, to make sure the length and diameter are right.


Few manufacturers test each and every small dimension glass tube fuse they make. Even fewer test each fuse both physically and electronically.

Our tougher testing assures that the Buss fuses you buy will perform exactly the way you want them to. When you want them to.

It also explains why Buss fuse quality is in a class by itself.



Bussmann. **The Protection** Experts.



Bussmann Manufacturing Division McGraw-Edison Company P.O. Box 14460 St. Louis, Missouri 63178



#### Tone Receivers, two ways from two sources.

Two tone receivers with versatile performance capabilities are available from two sources, ITT and Mitel.

Both offer the 88205 single package Hybrid DTMF Receiver System.

Or ITT's 3044 and 3045 DTMF group filters, along with additional limiter circuitry, can be used with Mitel's MT 8820 — or any other similar decoder chip — to design your own tone receiver.

You will find all of these components to be of high quality, and packaged with reliability to meet your most stringent demands. Specify them for your next central office, PABX, key system, mobile paging system or signaling application.

For more information, contact: ITT North Microsystems Division, 700 Hillsboro Plaza, Deerfield Beach, Florida 33441. Phone: (305) 421-8450, TELEX & TWX: 510-953-7523.

# III North

Microsystems Division

Circle 201 on reader service card

# ALCIA Ed AL

# R6500 any way you like it. That's Rockwell Micropower!

Rockwell's R6500 microcomputer system consists of a family of ten software-compatible CPUs featuring 13 powerful addressing modes.

You get general-purpose I/O, communications interface, standard memory, and combination memory-I/O-timer circuits. Our intelligent peripheral controllers provide cost effective software/hardware tradeoffs. And

R6500 CPU Options

	40-Pin DIP		28-Pin DIP				
On chip clock	R6502		R6503 R6513	R6504 R6514	R6505 R6515	R6506	R 6507
External Clock		R6512					
Memory Address Space	65K	65K	4K	8K	4K	4K	8K
Interrupts — Maskable — Non-Maskable	Yes Yes	Yes Yes	Yes Yes	Yes No	Yes No	Yes No	No No
SYNC — Output indicates op code fetch cycle	Yes	Yes	No	No	No	No	No
RDY – Single step and slow memory synchronization	Yes	Yes	No	No	Yes	No	Yes
Ø <sub>1</sub> Clock Output	Yes	Yes	No	No	No	Yes	No
DBE — Extended Data Bus Hold Time	No	Yes	No	No	No	No	No

there's even a single-chip R6500/1 microcomputer.

To give you a headstart in microcomputing, AIM 65 (R6500 Advanced Interactive Microcomputer) puts a terminal style keyboard, 20-character alphanumeric printer and display, cassette interface, and more at your fingertips for only \$375.

To put your design effort in high gear, Rockwell's SYSTEM 65 is a powerful, easy-to-use development system with two integral mini-floppy disk drives. High level PL/65 language designed to increase programming productivity is also available.

More to choose from in 1979 from the fastest selling microprocessor in 1978. That's Rockwell Micropower.

For more information, contact Department 727-F2, Microelectronic Devices, Rockwell International; P.O. Box 3669; Anaheim, CA 92803, or phone (714) 632-3729.



#### Rockwell International

...where science gets down to business

# ANALOG I/O FOR MICROCOMPUTERS? WE HOLD ALL THE CARDS.

- Analog input cards, output cards, combination I/O Cards.
- Compatible with all popular single board microcomputers.
- Pick a card, any card, right now, and get two week delivery.



- 4 Output Channels \$379 · Combination 1/0



ADI RTI 1230 Series • 16 Input Channels \$399

- 4 Output Channels \$375
- · Combination 1/0

ADIRTI1240 Series

- 16 Input Channels \$445 · 8 Output Channels \$675
- 4 Output Channels \$395 \$560
- · Combination 1/0

ADI RTI 1220 Series

. 16 Input Channels \$330



ADI RTI 1250 Series

- . 16 Input Channels \$560
- · 4 Output Channels \$550
- · Combination 1/0

For complete information on the Analog **Devices RTI Series** Analog I/O Subsystems, call Russ Ver Nooy at (617) 329-4700. Or write Analog Devices, P.O. Box 280, Norwood, MA 02062.

®Registered trademark of Digital Equipment Corporation.



WAYOUT IN FRONT.

· 4 Output Channels \$275 · Combination 1/0 Analog Devices, Inc., Box 280, Norwood, MA 02062; East Coast: (617) 329-4700; Midwest: (312) 894-3300; West Coast: (213) 595-1783; Texas: (214) 231-5094; Belgium: 031/37 48 03; Denmark: (02) 845800; England: 01/94 10 46 6; France: 686-7760; Germany: 089/53 03 19; Japan: 03/26 36 82 6; Netherlands: 076/879 251; Switzerland: 022/319704; and representatives around the world.

> For more information on: Intel circle 203, Motorola circle 261, Texas Instruments circle 262, Dec circle 263, Mostek circle 264,

#### **New products**

Computers & peripherals

# Disks driven to long life

Double-sided, double-density floppy-disk drive yields media life of  $3 \times 10^6$  passes

Dead disks don't deliver dependable data. And that goes for 5-inch floppies as well as for the 8-in. units. Qume Corp. has therefore taken the proprietary head-assembly design, which it first introduced on its Data-Trak 8 drive, and applied it to a drive designed to work with 5.25-in. flexible disks. Called the DataTrak 5, the new drive is a double-sided, double-density unit that Qume says attains a recording-medium lifetime in excess of three million passes per track.


Unveiled at the National Computer Conference in New York earlier

this month, the DataTrak 5 drive has an unformatted capacity of 437.5 kilobytes and a formatted capacity of 286.7 kilobytes. Its recording density is 5,456 bits per inch, and its data-transfer rate is 250 kilobits per second. Track-to-track access time for the 70-track drive is 20 ms, settling time is 15 ms, and average access time is 241 ms. Head loading, which is independent of media loading, takes only 50 ms.

In addition to its wear-reducing head design, the DataTrak 5 has a door-closure lockout that further protects the disk against damage. The lockout prevents the drive door from being closed if the disk is not properly inserted.

The drive requires only 12 W of power in continuous operation. It will work from either +5- or +12-V dc supplies. The unit sells for \$465 in singles and will be available in production quantities in the third quarter of this year.

Qume Corp., P. O. Box 50039, San Jose, Calif. 95150. Phone Gail R. James at (408) 942-4000 [361]

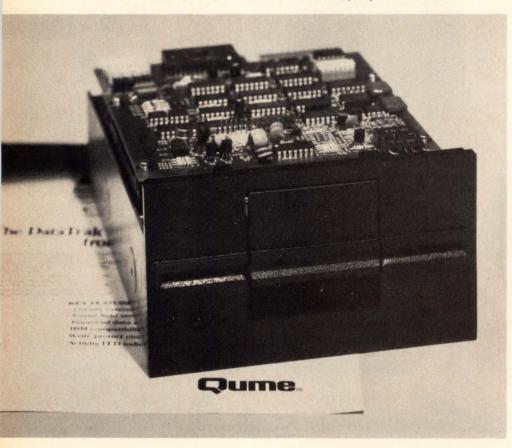

### NECIS introduces advanced Winchester disk family

NEC Information Systems, the Nippon Electric Co. subsidiary, has introduced a series of three highperformance disk storage subsystems based on an advanced Winchestertype design. Called the D-1200 series, the family comprises the 20-megabyte model 1210, the 40-megabyte model 1220, and the 1240, which has an 80-megabyte capacity. Four features cited by the manufacturer as particularly important for the American OEM market are high speed, field expandability, small size, and high reliability.

The speed specifications include a latency time of 8.3 ms, an average seek time of 40 ms, and a data-transfer rate of 1.2 megabytes per second. Field expandability is provided for the two smaller units in the family—each can be upgraded at a user's site in a few minutes by a field engineer. As their field-expandability implies, the three units are the same size: 17 in. wide by 10 in. high by 28 in. deep. They fit in standard 19-in. racks and weigh 99 lb. According to the company, the D-1200 units have a mean time

OEM quantity pricing for the subsystems starts at \$2,950 for the model 1210, \$3,300 for the 1220, and \$3,870 for the 1240. Delivery time is 60 days.

between failure of 10,000 hours and a mean time to repair of 30 minutes.

NEC Information Systems Inc., 5 Militia Dr., Lexington, Mass. 02173. Phone Douglas Campbell at (617) 862-3120 [364]

#### Fast cartridge system loads Winchester disk in 7 min.

Intended for archival storage in diskbased small business systems and the like, the Streaming Microtape cartridge ½-in. tape drive accepts and puts out a stream of data at a 576kilobit/s transfer rate. Thus it can store or restore the contents of a Winchester-technology fixed-disk drive in 7 minutes. Total capacity is



#### CAPACITORS

polyester, polycarbonate and polypropylene capacitors in film/foil versions and metalized, aluminum-electrolyte capacitors, tantalum capacitors with liquid electrolyte, solid tantalum capacitors, ceramic capacitors.

#### RESISTORS

carbon-film resistors, metal-film resistors, metal-oxide film resistors, precision wirewound resistors, potentiometers.

#### **AND FURTHER**


interference suppression devices, voltage multipliers (cascades), thick-film devices (thick-film hybrid circuits, resistor networks, high-ohmic resistors), semiconductors and microcomputer learning systems.

The range of application for ROEDERSTEIN components encompasses the whole entertainment electronics spectrum, household appliance and industrial electronics, communications, measuring and control, office equipment and computers, medical electronics, and the aerospace electronics field. We can supply components that meet MIL, CECC and GfW specifications.

We will send you a short form catalogue upon request. If you need specific information a detailed catalogue is available.

#### FIRMENGRUPPE ROEDERSTEIN

D-8300 LANDSHUT-FEDERAL REPUBLIC OF GERMANY-TELEX 0 58 335 (erola)





Complete range of unregulated high voltage dc supplies with voltage outputs from 1 kV to 1000 kV and current outputs from 10 mA to 50 Amps available in standard designs at economical prices. Fully instrumented and protected, these supplies are

Laboratory use

ideal for:

- Capacitor charging
- Laser supplies
- CRT supplies
- Marx generators

Many more

5, 7.5 & 10 kV @ 5 mA OEM **Power Packs** 







#### **Power Packs**

Miniaturized, oil-filled steel cans for OEM use. Voltages from 2.5 kV to 100 kV at 2, 5 & 10 mA. Low cost, high reliability

#### **Metered Power Packs**

Same miniature power packs available with simplified or deluxe controls for rack-mounting. Short circuit current limit option makes these ideal for cap charging applications.

Write or call for complete details.



P.O. Drawer A. Brewster, NY 10509 (914) 279-8031 Twx 710-574-2420 Amex Symbol: HIP

#### **New products**

30.2 megabytes per cartridge.

To achieve an error rate of better than 1 in 1010 bits (less than one error in every 30 cartridges), the Streamer has internal error correction. It can read or write at 90 in./s without stopping between data blocks.

Also available is a stripped-down version, the Streaker, which can transfer data at 648 kb/s and has a total capacity of 34 megabytes per cartridge. It does not offer error correction.

Both of the new cartridge tape drives feature a data density of 6,400 bits per in. on standard ANSI/ECMA 1/4-in. tape cartridges, as do earlier products in the Microtape line. They both use a seven-track bidirectional head. The Streamer fits into a 7by-7-in. opening, requiring an 8-in. depth; the Streaker is not quite as high as the Streamer.

In effect, the Streamer and Streaker are first-in, first-out memories. They share the speed advantages of much more expensive tape drives, but they save money because they eliminate the fast start/stop operation necessary for randomaccess retrieval.

The Streamer will cost \$1,219 in original-equipment-manufacturer quantities and will be available in mid-August. The Streaker costs \$885 in OEM quantities and will be available in July.

Data Electronics Inc., 370 N. Halstead St., Pasadena, Calif. 91107. Phone (213) 351-8991 [362]

#### Tape system takes aim at DEC TM11-TU10

The PM-TS11 magnetic-tape subsystem from Plessey Peripheral Systems is compatible with Digital Equipment Corp. diagnostics and software and is intended as a direct replacement for DEC's TM11-TU10 tape system. A choice of nonreturn-to-zero or phase-encoded formats is provided by the PM-TS11 as are seven-track 4-4-4, IBM, and DEC byte packing for dumping memory.



To ensure accurate data transfers, the PM-TS11 employs a combination of vertical, longitudinal, and cyclic redundancy checking for NRZ formats, as well as single-track error correction in phase-encoded formats. The tape system can be set up to offer the user a choice of one of two of the following operating speeds: 12.5, 25, 37.5, 45, 75, and 125 inches per second.

Single-unit prices start at \$5,874 for a 45-in./s, NRZ-only drive. Delivery time is 30 days.

Plessey Peripheral Systems, 17466 Daimler, Irvine, Calif. 92714. Phone Gerard Mottier at (714) 557-9811 [365]

#### CRT terminal is compatible with DEC's VT-100

First in the series 80 line, the DT80/1 is a cathode-ray-tube terminal that is fully compatible with Digital Equipment Corp.'s popular VT-100 video terminal. The unit can work independently as data is transmitted to an on-line printer, be used to control the printer's operation, or feed data to a printer from its CRT screen.

The self-diagnosing terminal has a detachable keyboard and can display 24 lines of 80 or 132 characters. Users can scroll through pages in either direction and can underline and blink characters or display them at two different levels of intensity.

## NOW YOU CAN HAVE THE DISPLAY CIRCUITRY FOR A CRT TERMINAL YOUR WAY.

#### REGULAR...



#### CRT 7004 \$14.00\*

#### FEATURES

On chip character generator (mask programmable)

128 Characters • 7 x 11 Dot matrix block.

On chip video shift register.

Maximum shift register frequency.

CRT 7004A 20MHz · CRT 7004B 15MHz CRT 7004C 10MHz · Access time 400ns

No descender circuitry required.

On chip cursor.

On chip character address buffer.

On chip line address buffer.

On chip horizontal and

vertical retrace video blanking.

Single +5 volt power supply.

TTL compatible.

MOS N-channel silicon-gate COPLAMOS®


process.

CLASP® technology.

Compatible with CRT 5027 VTAC®

Enhanced version of CG5004L-1.

#### OR WITH THE WORKS.

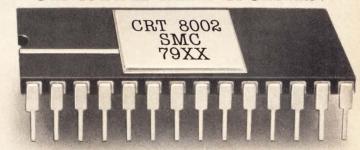

#### CRT 8002 \$24.00\*

#### **FEATURES**

On chip character generator (mask programmable).

128 Characters • 7 x 11 Dot matrix block.

On chip video shift register.

Maximum shift register frequency.

CRT 8002A 20MHz • CRT 8002B 15MHz CRT 8002C 10MHz · Access time 400ns

No descender circuitry required.

On chip cursor.

On chip address buffer.

On chip attribute buffer.

On chip horizontal and

vertical retrace video blanking.

Single +5 volt power supply.

TTL compatible.

MOS N-channel silicon-gate COPLAMOS®

process.

CLASP® technology-ROM and options.

Compatible with CRT 5027 VTAC®

Four modes of operation (intermixable).

Internal character generator (ROM).

Wide graphics • Thin graphics •

External inputs (fonts/dot graphics). On chip attribute logic-character, field

Reversible video • Character blank

Character blink • Underline • Strike-thru

Four on chip cursor modes.

Underline • Blinking underline

Reverse video • Blinking reverse video

Programmable character blink rate.

Programmable cursor blink rate.

Expandable character set. External fonts · Alphanumeric and graphic

RAM, ROM, and PROM.

\*price for 100 unit quantity, "B" version in ceramic package.




#### STANDARD MICROSYSTEMS CORPORATION

35 Marcus Boulevard, Hauppauge, New York 11787 (516)273-3100 TWX: 510-227-8898

We keep ahead of our competition so you can keep ahead of yours.

Circle 207 on reader service card

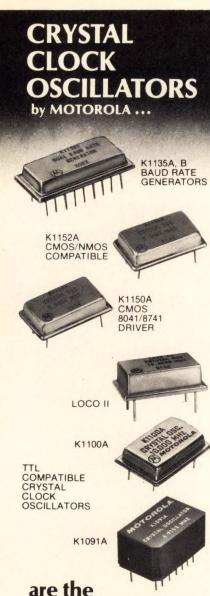

are the industry standard! HERE'S WHY:

the widest line of thick film crystal clock oscillators , available anywhere.

frequency stability to match your application.

frequencies as low as 25 kHz, as high as 70 MHz.

▼ logic outputs for TTL, CMOS, ECL, NMOS, dual comple-/ mentary TTL.

volume production capability, fast prototype delivery.

DIP packaging saves board , space, assembly time.

in-house control, from quartz growing through thick-film processing.

Send today for more information on the clock oscillator to fit your application.



COMPONENT PRODUCTS 2553 N. Edgington Franklin Park, IL 60131

#### **New products**



Reverse video is also keyboard-selectable.

Internally, the DT80/1 houses a CRT controller with two serial input/output ports. The ports operate asynchronously, interface to RS-232 lines and 20-ma current loops, and work at communication rates of up to 19,200 bits/s.

The DT80/1 is priced at \$1,795 in single quantities and its delivery time is 90 days.

Datamedia Corp., 7300 N. Crescent Blvd., Pennsauken, N. J. 08110. Phone (609) 665-2382 [366]

### File system works with IBM Series / 1 computers

Designed for use with IBM Series/1 computers with RPS (Realtime Programming System), RMS is an integrated technique for data storage, retrieval, and manipulation. The software product features uniform directory utilization to enhance and simplify RPS.

Operating in the shared task set partition, RMS is available to all users and user tasks. It is compatible with all versions of RPS and is used with Assembler, Cobol, Fortran, and PL/1. During compilation, preprocessors convert all RMS commands into source code with calls to the RMS run-time system.

RMS supports multiple-volume files, several file organizations, and multiple indexes per file. Record lengths may be variable and can expand or contract during updating. Although simultaneous access to a single file by several users is permitted, RMS protects files against



Circle 266 on reader service card

Engineers · Managers · PA's · Distributors
INSTANT

INSTANT SEMI-CONDUCTOR SOURCE & CLASS DATA

SOURCE & CLASS DATA
Just Published.

Free 30-Day Trial! MASTER TYPE LOCATOR New reference instantly identifies nearly 200,000 type numbers, their product classes & manufacturers including addresses. You get total coverage for big time savings — transistors, diodes, thyristors, optoelectronic and power devices; digital, interface, memory and linear ICs. Includes 11,300 JEDEC and 6,500 military-qualified devices.

D.A.T.A.'s exclusive Product Class Code tells you, in instant "shorthand," who makes the type and what it is. And tells you which D.A.T.A. BOOK to consult for full technical specs.


\$34.50, U.S.; \$36.20 International. 606 pp.

#### D.A.T.A.BOOKS

P.O. Box 602, Pine Brook, N.J. 07058

	a free 30-day trial. Returnable for t, if not completely satisfied.
Name	
Company	
Address	
City/State/Zip	
Telephone (	1

☐ Send brochure on your 17 D.A.T.A. BOOKS.

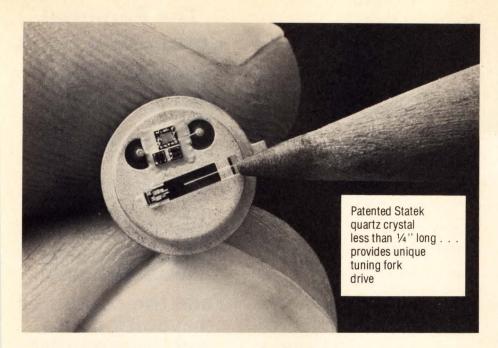

# Is this the Ultimate Low-Frequency Oscillator?

Introducing the world's smallest, toughest, most accurate low-frequency quartz crystal oscillator.

Now available at modest prices IN ANY CUSTOM FREQUENCY from 350 kHz all the way down to 10kHz in a tiny TO-5 can.

If you need compact, low-frequency oscillators, our new SQ oscillators can save you money and headaches —no matter whether you need 5,000,000 pieces or just 50. They offer all the superb performance features associated with quartz crystal drive such as extreme accuracy, high temperature stability, low aging and very low power consumption. In addition, they offer Statek's patented quartz tuning fork which allows greater miniaturization, lower power drain and much higher shock resistance compared to any other low-frequency crystal on the market.

#### LONG LIFE

The typical no-load current drain of the SQ oscillator is only  $500\,\mathrm{uA}$ , meaning extremely long life when powered by battery. Calibration accuracy is  $\pm\,0.01\%$  and remains

within specification for enormous periods of time because of the microscopic aging properties of quartz.

#### **REMARKABLE FOR \$10**

It is built to withstand a shock of 1000g (half sine wave) for one millisecond—the equivalent of a hammer blow. That's why the world's largest manufacturer of police radios uses our SQ oscillator for hand-held radios that take a tough beating every day. The temperature capability of the SQ oscillator is also exceptional. Thousands have been used at extremely high temperatures in torturous down-hole, oil-well logging operations. These are remarkable features for a \$10 (1000piece price) oscillator tuned to your custom frequency anywhere in the range 10 to 350kHz.

#### THESECRET

How did we get such a lot of capability into such a tiny space—at such tiny prices? The secret is a unique quartz crystal design in the shape of a tuning fork plus patented production processes and nine years' experience in producing 20 million crystals. We manufacture crystals in the millions by semi-conductor manufacturing techniques and tune them to your special frequency with automatic high-speed laser systems that burn off deposited gold until each unit resonates at the correct natural frequency.



PRICES: SQ SERIES
Prices are for custom frequencies.
Minimum order is five pieces.

5-24	\$49.00	
25-49	38.00	
50-99	28.00	
100-249	21.50	
250-499	15.50	
500-999	12.50	
1,000	10.00	


**Stock frequencies** of 10.0, 12.8, 15.36, 16.0, 16.384, 19.2, 32.768 & 100.0 kHz available at even better prices.

NOTE: Extremely low custom frequencies—as low as 1 Hz per day—are also available in a divided output version of the SQ oscillator known as the DQ series.

Call Mal Kaufman now at (714) 639-7810 to discuss your application



Statek Corporation, 512 N. Main, Orange California 92668, phone (714) 639-7810 TELEX: 67-8394

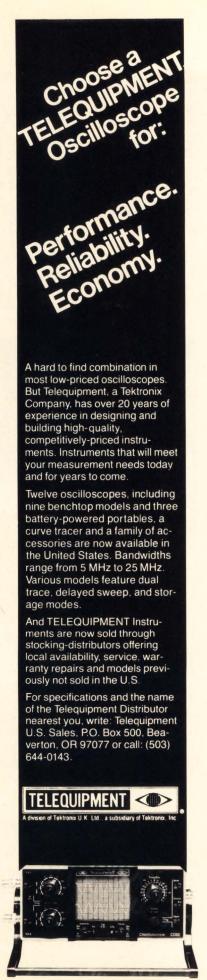

#### **New products**


simultaneous double updates through a user-controlled record lock.

RMS is available on a license basis for \$7,800 including training and documentation.

Data Structures Inc., 122 East 42 St., New York, N. Y. 10017 [367]

### Memory board stores up to 131,072 words

The ECOM 137S is a memory card containing address registers, data registers, and interface control circuitry. Its capacity is expandable, in increments of 16,384 words, up to




131,072 words. Standard word lengths of 18 to 24 bits are offered for systems that require parity bits or error-correcting capability.

Starting addresses are switch-selectable and individual bytes can be read and written independently. Memory can be refreshed automatically or under external control. Backup power can be supplied continuously or in bursts to reduce power consumption. A light-emitting diode indicates when the memory is being accessed or that it was the last board accessed; the memory can be switched offline for troubleshooting while power is maintained.

The board's write access time is 150 ns, its read access time is 350 ns, and its cycle time is 450 ns. A 128-κ-by-18-bit ECOM 137S is priced at \$3,575 in single quantities and has a delivery time of 30 days.

Trendata/Standard Memories, 3400 W. Segerstrom Ave., Santa Ana, Calif. 92704. Phone Carl Peterson toll-free at (800) 854-3792 or at (800) 432-7271 in California [368]

# The Personal Computing Book



# Take the computer revolution into your own hands!

More than 50 articles are presented from leading publications in the field to give you this up-to-date guide that answers all your questions on personal computing precisely and reliably.

Hardware • Software • Theory • Applications • Helpful Hints

Order today, and don't forget the other valuable Electronics Magazine Books listed in the coupon below.

listed in the coupon below.
Electronics Magazine Books P.O. Box 669, Hightstown, NJ 08520 Send me
copies of Microprocessors @ \$8.95
copies of Applying Microprocessors @ \$9.95
copies of Large Scale Integration @ \$9.95
copies of Basics of Data Communica- tions @ \$12.95
copies of Circuits for Electronics Engineers @ \$15.95
copies of Design Techniques for Electronics Engineers @ \$15.95
copies of Memory Design: Micro- computers to Mainframes @ \$12.95
copies of New Product Trends in Electronics, No. 1 @ \$14.95
copies of Personal Computing: Hardware and Software Basics @ \$11.95
Discounts of 40% on orders of 10 or more copies of each book.
I must be fully satisfied or you will refund full payment if the book is returned after ten-day trial examination.
☐ Payment enclosed ☐ Bill firm ☐ Bill me
Charge to my credit card: American Express
☐ Diners Club ☐ Visa ☐ Master Charge
Acct. No Date Exp
On Master Charge only, first numbers above name
Name Title
Company
Street
City State Zip

Signature

product for a new the ideal graphical device for builders of microprocessor controlled instrumentation systems eneration instrumentation systems

PERK4R

Do you need your data annotated with alphanumerics?

PEAK3A

PEAK3B

Our TISPP prints before, after, as well as during curve data input, on the same chart with simple ASCII inputs.

Do you want to graphically display processed data?

Our TISPP databus will accept your digital data and plot it along with raw sensor data

Is your strip chart recorder data analog or digital?

Our TISPP can handle both. Two pens if you like. And even annotates both traces. Who else can do it?

The Series 6000 Thermal/Intelligent/Strip Plotter/Printer DOES IT ALL

- Raw detector data
- Alphanumeric printing
- Processed data

Thermal writing speed compensated; print speed 20 characters per second; sensitivity from 10 mv to 5 v full scale analog: 12 bit binary full scale digital; plot speeds up to 75cm. (30 in.) per second; 0.3% full scale

accuracy; chart speeds from one second per cm. to over one hour per cm. Who else can give you this hardcopy capability, ready to be built into your system? Prices start at \$1640\* (quantity discounts available, of course).

For more information, contact Jim Bell, Houston Instrument, One Houston Square, Austin, Texas 78753 (512) 837-2820. For rush literature requests outside Texas call toll free 1-800-531-5205. In Europe contact Houston Instrument. Rochesterlaan 6, 8240 Gistel Belgium. Phone 059/277445 Telex Bausch 81399.

Shown above: Model C 6200 2 pen TISPP

houstor

DIVISION OF BAUSCH & LOMB

"the graphics - recorder company"


# Semipack



# Original Module

# What engineer would accept a copy?

The SEMIPACK is the most innovative and most copied multifunction semiconductor power module developed in the last decade. The major semiconductor manufacturers think so too — they are now copying the SEMIPACK. It's also true that many of the modules look-a-like. You can sure tell a copy from the real one if you know what to look for in performance. Performance highlights: • extremely compact — complete with terminals and links • electrically isolated base eliminates all insulation problems • multiple units of single or three-phase assemblies can be mounted on a single heatsink • large power capacity — 25 to 90A per unit to 1400 PIV and • withstands current surges of up to 1750A at max junction temperature.




SEMIPACK — a modular concept based on series connected pairs of two diodes, two thyristors, or one diode and one thyristor — is the ideal building block for controlled and non-controlled systems that are compatible for simple assembly into

single and three-phase bridges as in half-controlled, fully controlled, diode bridges and ac controllers. Typical applications include: phase and inverter motor controllers, electrical lighting controls, elevator controllers, welding... Insist on quality and performance — specify SEMIPACK the original and still the best power module. Technical data available on request. Write or call today.

Tel: 603 883-8102

SEMIKRON INTERNATIONAL INC.

11 Executive Dr. / P.O. Box 83, Hudson, N.H. 03051

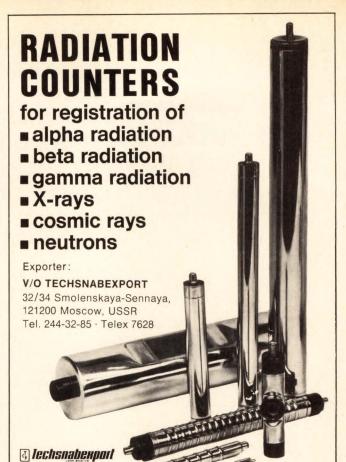

Circle 269 on reader service card

#### SUPER MINIATURE

Neon Glow Lamps

#### CLEAR-GREEN

Fluorescent Glow Lamps

Circuit Volts······· AC crDC 105-125 Series Resistance···· 33ΚΩ Nominal Current····· 1.6mA

Total Flux(MIN.) ...... AC:120mlm, DC:130mlm Avg. Life Hours ...... AC:30,000 DC:40,000

Circuit Volts·········· AC 105-125
Series Resistace ······ 27ΚΩ
Nominal Current ······ 1.5mA
Total Flux······· 90mlm MIN.
Avg. Life Hours····· 20,000

# NL-35/G

Dimension: mm

\$3.8 mm

NL-8S

6.0 mm

19mm

#### MAIN PRODUCT

NEON GLOW LAMP, XENON FLASH LAMP, NL-21/G RARE GAS, DISCHARGE LAMP. MINIATURE: BLACK-LIGHT, UV-LIGHT, FLUORESCENT COLOR-LIGHT.

### ELEVAM ELECTRONIC TUBE CO., LTD. EXPORT DIVISION

NO. 17-8 CHUO 2-CHOME OTA-KU, TOKYO JAPAN.
TELEPHONE: 03(774) 1231~5 TELEX: 246-8855 ELE

# C.P. CLARE'S µP KEYBOARD WITH REEDS. THE BEST OF THEM ALL.

#### Best µP.

Here's why. Its second-generation microprocessor has EPROM capability — real smarts. It gets us from your keyboard concept to a prototype design in record time. It enables completely customized software control of all key functions. You can program in automatic repeats, multiple program a single keyboard, program changes in the field. You can have 8-bit serial and/or parallel I/O. Three-key rollover is built in with N-key rollover possible. There are no compromises and the options are unlimited.

#### Best of both worlds.

Couple this  $\mu$ P with the unique low-profile reed switches we manufacture and you've got the best of two technologies — an unbeatable keyboard system. You know reed contacts are sealed against hostile environments. You know reeds are extremely dependable and stable. They'll switch faultlessly over 108 times. They are low in power consumption. And zero in power drain. Another key point: they've got the feel operators like, so speed and accuracy increase.


#### Best keytops.

C. P. Clare's keytops are non-glare, 2-shot molded. The legends sharp and clear for life. The colors lab-quality, 3-dimensionally controlled. Yes. 3-dimensionally controlled.

#### Best advice.


C. P. Clare's µP keyboard is the best of them all. But is it best for you? Call the C. P. Clare sales office nearest you and arrange to talk to a keyboard expert. He'll tell you honestly if it is, or if you'd be better off with another C. P. Clare keyboard design. Talk to him today. Or, if you prefer, write C. P. Clare and Company, 3101 W. Pratt Avenue, Chicago, IL 60645. Or call 312-262-7700.

#### We help you compete



Height with keytop: 15/16



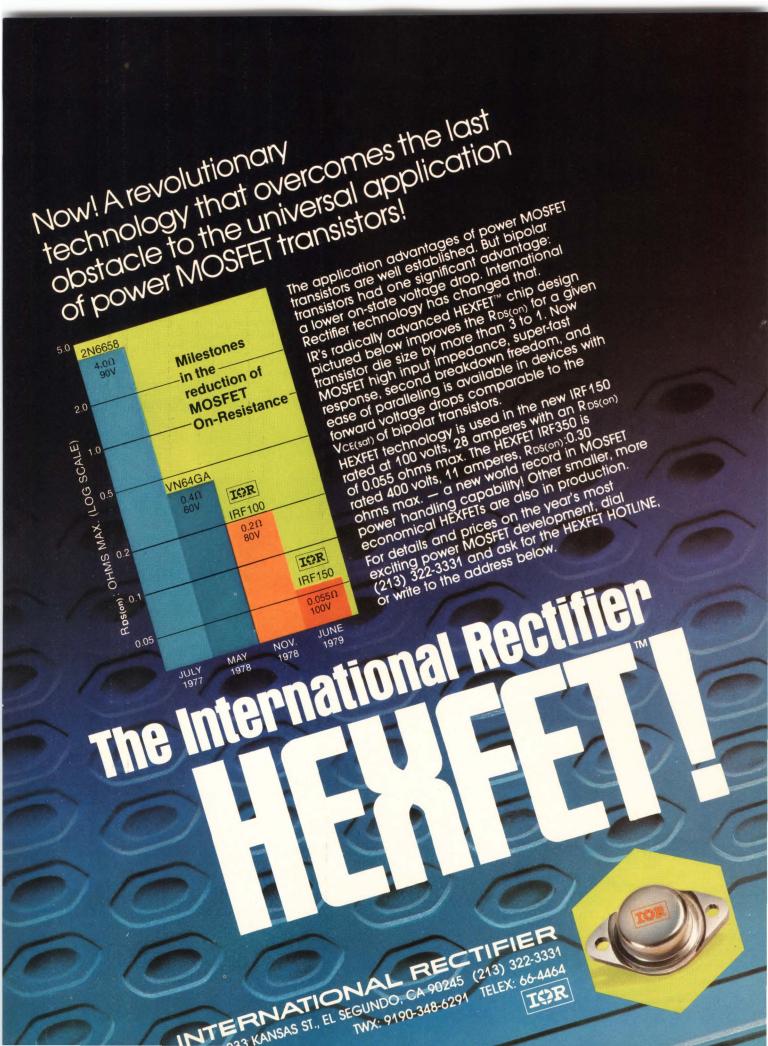

#### Products newsletter\_

# Honeywell upgrades electrostatic printing system

The PPS II page-processing system from Honeywell Information Systems Inc., Waltham, Mass., is an electrostatic printer capable of producing 18,000 lines per minute. An upgrade of the company's PPS I, the system is now capable of operating on line with a computer, and it also sports such extra features as software-encoded forms capability and software-loadable fonts. The machine, which interfaces with IBM 360 and 370 host computers, is intended for users who print at least a million or so pages per month, according to products consultant Trish Roberts. Imbedded in it are a dedicated Honeywell Level 6 minicomputer and a storage disk for buffering incoming data.

When the printer's metal styli are used to form electrostatic images on the paper, resolution can be as fine as 200 dots per inch. If higher resolution is needed for intricate designs such as company logos, a metal format cylinder may be used. According to Roberts, a minimally configured PPS II capable of printing 8,000 lines per minute and including an operator's console, a Level 6 model 43 minicomputer with 64 kilobytes of memory, 96 megabytes of disk storage, and a single paper stacker, will sell for \$140,000. Original PPS I pricing began at \$160,000. Operation at 18,000 lines per minute adds \$47,600 to the system price. Deliveries are scheduled to begin in the second quarter of next year. According to the company, all PPS Is are upgradeable to PPS IIs.

## Alternative found for VT-52 terminal

Fans of the popular VT-52 display terminal can rejoice: an alternative is available. Hazeltine Corp., Greenlawn, N. Y., has introduced an addition to its 8080-based 1500 family—the 1552, which offers total software compatibility with the VT-52, now in minimal production at Digital Equipment Corp., Maynard, Mass. Moreover, says Hazeltine, the 1552 has superior resolution and offers features not found on the VT-52. Among them: field tab, insert line, delete line, and programmable keyswitch audio feedback. Unveiled at the National Computer Conference in New York earlier this month, the 1552 sells for \$1,500 in single quantities.

#### Prices dropped for semiconductor tester

Tektronix Inc., Beaverton, Ore., has reduced the price and instituted some changes in the basic configuration of its S-3250 automated semiconductor test system. The new price is \$159,500, down from \$198,600. The changes involve software primarily. Complete Tektest III operating software, rather than the somewhat modified Tektest 50, has been added to ensure software compatibility with other S-3200 family members. And terminal control mode software for interactive program debugging is now included in the base price. Graphics software to enhance data reduction routines is also included.

## Wide-angle LED lamps get 50% brighter

The wide-angle LEDy Bug indicator lamp, which has a viewing angle of more than  $180^{\circ}$  [Electronics, Aug. 4, 1977, p. 123], may now be purchased in red and amber versions with a brightness of 8 millicandelas. The green version has a brightness of 5 mcd—the same as the original units. All three colors still sell for  $56\phi$  each in quantities of 1,000 to 4,999.


# Keep Up With Change


#### Ferranti-Packard Electromagnetic Modules Let You Create The System

There are three new additions to the Ferranti-Packard 7 Segment Readout Displays – 9, 12 and 18-inch characters.

Now your customers who need large, remote controlled numeric readouts can use Ferranti-Packard Modules for time/temperature signs, price signs, speed limit signs, scoreboards and industrial displays. These new, large modules can be incorporated into almost any numeric display your customer could want—or you could design.

The light-reflecting display components come in white or fluorescent





fade-resistant colors. They're designed to ensure visual impact over an extreme ambient light range, even direct sunlight

Each module is made of rugged molded plastic parts to stand up to the most extreme environment.

They contain only seven moving, self-lubricating segments rotating on stainless steel pivots and rated for 400 million operations.

There are no complex mechanical linkages to wear out or incandescent

lamps and neon tubes to burn out. Save energy too! Remanent magnetism retains the data displayed with zero power input.

From one-inch characters to large 18-inch units, Ferranti-Packard Modules give you the combination of reliability, visibility and flexibility no other read-out component can match.

Before you design your next numeric display, call Ferranti-Packard for assistance you can count on.

Ferranti-Packard, the Pioneer in electromagnetic displays.






#### **Ferranti-Packard Limited**

Electronics Division 6030 Ambler Dr., Mississauga, Ontario Canada L4W 2P1 Telephone: (416) 624-3020 Telex: 06-961437

Circle 216 on reader service card

# Hybrids: A New Dimension in Voltage to Frequency Converters




#### Ultra-Linear Voltage To Frequency Conversion

kHz and 1 MHz V to F converters where Nonlinearity is guaranteed to .005% Full Scale. Each model has exceptionally Low Drift specifications over the full -55°C to +125°C operating temperature range and offers up to 100% overrange. In addition, these highly reliable hybrids are screened to MIL-STD-883. Commercial versions are also available.

Just one more reason why . . .

No One Does It Better Than Philbrick

Circle 271 on reader service card



TELEDYNE PHILBRICK DATA CONVERTERS, V/F/V CONVERTERS, LINEARS, NONLINEARS, POWER SUPPLIES

Allied Drive at Route 128, Dedham, Massachusetts 02026 Tel: (617) 329-1600 TWX: (710) 348-6726 Telex: 92-4439



# **GDS II IS HERE**

Once again Calma is leading the industry in IC design solutions with our state-of-the-art advances to GDS II.

To aid on-line design, our command menus are continuously displayed on screen. So you don't lose time by looking away.

To provide user feedback, an alphanumeric screen displays a variety of messages. Including what steps are being processed, status reports, error messages. Even information to explain commands. All in plain English.

And to help define layers, there is GDS II's color capability.

there is GDS II's color capability. You can assign any one of seven bright colors to each layer. Different colored layers overlap to produce numerous hues and tones. You can also code any shape with dotted lines, dashed lines.

points or any combination of these. All shapes are maintained by refresh graphics and can be separately erased without affecting the remaining display.
Plus GDS II has the CAD features

Calma pioneered. Like fast data entry, full


function editing and simultaneous processing of multiple background operations. Including rules checks and matrix plotter support.

See the GDS II in full operation. Ask your Calma representative for a demonstration. Or send for our full color brochure. Write or phone Calma, 527 Lakeside Drive Sunnyvale, California 94086, (408) 245-7522

INTERACTIVE GRAPHIC SYSTEMS

#### **ON-LINE IC DESIGN** IN COLOR



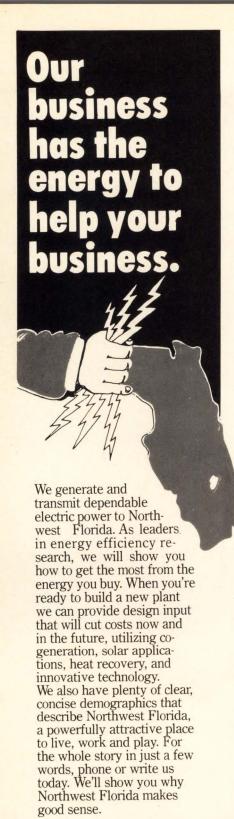

Gulf Power Company P. O. Box 1151 EL Pensacola, Florida 32520 (904) 434-8371




the southern electric system

#### **New literature**


Wafer testing. The 24-page report "A Wafer Chuck for Use Between -195° and 350°C" describes the design and features of a variabletemperature wafer apparatus for use in the detection of electrically active defects that produce deep levels in the band gap of silicon. Construction details and use of the apparatus are also discussed. To order printed copies, send \$1.20, along with stock number 003-003-02017-6 to Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402. Outside the U. S., add 25% to cover mailing costs. To order microfiche copies, send \$3.00 (U.S., Mexico, Canada) or \$4.50 (elsewhere) along with NTIS number NBS-SP-400-55 to National Technical Information Service, Springfield, Va. 22161.

Data-communications standards. Specifications of important American communications organizations can now be found in the "Data Communications Standards Library." The 330-page book contains six Electronics Industries Association RS standards, three EIA industrial bulletins, a description of IBM's Binary Synchronous Communications protocol and AT&T's Advanced Communications Service Host and Terminal Functional interface. It is available for \$85 from Remark International, 4 Sycamore Dr., Woodbury, N. Y. 11797.

Electronics hardware. Extensive lines of custom and standard printed-circuit-board racks, enclosures, and other hardware for electronic equipment are discussed in a 118-page engineering guide. The guide also contains detailed photos, drawings,



# Leaders in Electronics



# The only reference devoted solely to biographies of the most influential people in electronics

• corporate executives • technical managers • designers/developers • government and military officials • academics • consultants • editors/ publishers • trade/professional group directors • securities analysts

Plus an 80-page index of biographees by affiliation, including independent consultants in every electronics specialty.

Prepared by the staff of **Electronics** magazine. 5,240 biographies. 651 pages, clothbound. \$39.50

Electronics Magazine Books P.O. Box 669, Hightstown, NJ 08520 Send me					
\$39.50 plus appl	licable sales	in Electronics @ stax. McGraw-Hill andling charges on			
	I must be fully satisfied or you will refund full payment if the book is returned after ten-day trial examination.				
	☐ Payment enclosed ☐ Bill firm ☐ Bill me				
Charge to my credit card: ☐ American Express ☐ Diners Club ☐ Visa ☐ Master Charge Acct. No. ☐ Date Exp.					
On Master Charg					
Name					
Company					
Street					
City	State	Zip			
Signature					

# NORPLEX® POLYIMIDE-BASE LAMINATES

help you achieve high performance and greater yield.



Our 32-channel logic state analyzer is a microcomputer. The User's Program Board, programmable front panel, and bidirectional data ports allow you to perform advanced stimulus and analysis functions. The extra program space lets you add printer testing, control panel, and automatic test equipment (ATE) functions to our standard Model 532.

Call or write Paratronics, Inc., 122 Charcot Avenue, San Jose, CA 95131, (408) 263-2252.



Outside California – call toll free: (800) 538-9713

### **PROGRAMMABLE**



For Demonstration circle #272

For additional information circle #273

# 5 Functions!! 5 Digits!!

Universal Electronic
Counter



#### RC-5TB

\$144

- Five full digits.
- •DIN/NEMA case.
- Unit counter plus frequency, frequency ratio, period & time interval.
- Count rate: less than 1 MHz
- Hold and reset feature.
- •Large 0.5" LED display.

NLS products are available from Nationwide Electronic Distributors. Send for our brochure today!



Non-Linear Systems, Inc.
Originator of the digital voltmeter.
Box N, Del Mar, California 92014
Telephone (714) 755-1134 TWX 910-322-1132

# MOVING?

Please give us 4 weeks advance notice. Attach the label for your old address, write in your new address below, and send to Fulfillment Manager, Electronics, P.O. Box 430, Hightstown, N.J. 08520.

OLD ADDRESS LABEL

I	V	W	A		n	D		C	C
A	٧	V	A	u	U	n	ᆮ	J	J

Name
Address

State/Province

Zip/Postcode

Country

|----

City

#### **New literature**

and data on terminals, standoffs, feedthroughs, molded terminals, spacers, captive screws, terminal boards, enclosure handles, extractors, heat sinks, component clips, and component clamps. For a copy, write to Ed Karale, Industrial Products Division, Birtcher Corp., 4501 N. Arden Dr., El Monte, Calif. 91731. Circle reader service number 424.

Semiconductor guide. More than 2,200 solid-state replacement devices are listed in Sylvania's 1979 ECG Semiconductor Master Replacement Guide and Catalog. The 354-page guide also lists additions to the ECG line, which includes optoelectronic devices for control and display, radio-frequency power output transistors, high-voltage rectifiers, additions to the bipolar and field-effect transistor lines, and high-voltage multipliers. The technical section of the guide contains many specifications on transistors, diodes, rectifiers, thyristors, linear and digital modules, and integrated circuits. Copies of the guide may be obtained by mailing \$2.95 to GTE Marketing Services Center, 70 Empire Dr., West Seneca, N. Y. 14224.

Generators. A four-page catalog contains detailed specifications, pictures, and applications information on Berkeley Nucleonics Corp.'s family of digital delay generators that are available with timing resolutions down to 1 nanosecond for generating delays, pulse widths, periods, and counted pulse bursts. Material describing trigger pulse amplifiers, power supplies, and a series of trigger coherent frequency sources is also provided. Berkeley Nucleonics Corporation, 1198 Tenth Street, Berkeley, Calif. 94710 [425]

Filters. The theoretical frequency, phase, and step responses of Butterworth, Chebyschev, and Cauer (elliptic) functions are presented in a 12-page bulletin, "Fixed-Frequency Highpass Filters." Available models are described. Frequency Devices Inc., 25 Locust St., Haverhill, Mass. 01830 [426]

# FREE "TV GUIDE" FOR OEM'S.

What you put on the screen is your business. The screen you put it on is ours.

So, we've published a guide to help you choose the best Conrac CRT monitor for your particular system application.

If you need high-resolution graphics, for instance, we can give you up to 1225 lines per frame.

Or, if simple alphanumerics are what you want, we have simple monitors featuring Conrac reliability at low cost.

For the ultimate in computergenerated color imagery, consider our model 5700. It's a highly-advanced monitor featuring superior capabilities for sophisticated applications.

We've been producing advanced monitors for 29 years. So, no matter what you need in terms of image display, you can depend on Conrac's specialized experience and depth of technology. And, since Conrac monitors are made in the U.S.,

And, since Conrac monitors are made in the U.S., we're always here to supply first-hand technical assistance and parts.

Call or write today for more details and your copy


of the Conrac Video Monitor Guide. Conrac Division, Conrac Corporation, 600 North Rimsdale Ave., Covina, CA 91722, Tel. (213) 966-3511, Telex: 67-0437.



CONRAC

We're more than meets the eye.

Circle 221 on reader service card

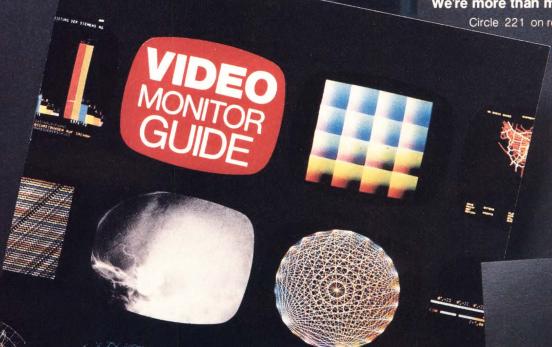

the pite is right, too

send the free

COMPANY

# Instant access to all American and International Data Communications Standards

Data communications standards are undeniably necessary and helpful. But... the proliferation of standards by the many committees and groups has left the data communications equipment user and designer searching through numerous publications to find the applicable standards for each job.

#### Now: that time- and effort-wasting trial is over.

With the publication of this landmark resource, you can quickly and accurately determine exactly which standards apply to the project at hand, and speedily integrate those standards into your own network requirements.

# Presents all relevant data communications standards promulgated by:

- Consultative Committee for International Telephone and Telegraph (CCITT)
- International Organization for Standardization (ISO)
- American National Standards Institute (ANSI)
- Electronic Industries Association (EIA)
- Federal Telecommunications Standard Committee (FTSC)

#### Need to know the latest standards for...

- data transmission over public data networks?
- computers and information processing systems?
- peripheral equipment?
- signal quality and analog and digital interfaces?

It's all here, and more, complete with introductory descriptions of the groups that promulgate the standards... and relational charts of similar interfacing standards produced by different groups.

Edited by HAROLD C. FOLTS, data communications standards consultant; and HARRY R. KARP, Editor-in-Chief, Data Communications, McGraw-Hill Publications Company 1133 pages

#### **Design Engineers**

Find the technical specs you need instantly.

#### **Planning Engineers**

Determine which standards apply to a vast range of networks and components.

#### **Operations Managers**

Learn whether the equipment you're buying will operate at all applicable standards.

#### Order today using this coupon!

Return coupon to:
Data Communications Standards
P.O. Box 669
Hightstown, New Jersey 08520

Send me\_\_\_\_\_\_ copy (copies) of DATA
COMMUNICATIONS STANDARDS (0997829) on a 10-day money-back guarantee. I understand that if I am not absolutely satisfied, I may return the book(s) within ten days at no further obligation. Otherwise, McGraw-Hill will bill me \$165. for each copy, plus applicable sales fax, shipping and handling charges.


SAVE MONEY! Enclose payment in full, plus local sales tax, and McGraw-Hill pays all regular shipping and handling charges. Ten-day money-back guarantee still applies.

\_\_\_\_\_ Check enclosed \_\_\_\_\_ Bill me \_\_\_\_\_\_ Bill my company \_\_\_\_\_ Company purchase order #


This offer subject to acceptance by McGraw-Hill.

EL 1

# Berg's TLC\* connector terminates transmission line cable without a paddleboard.

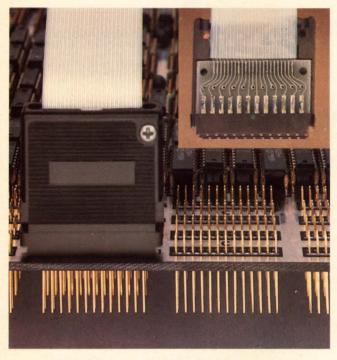

Paddleboard assembly-the slow way.

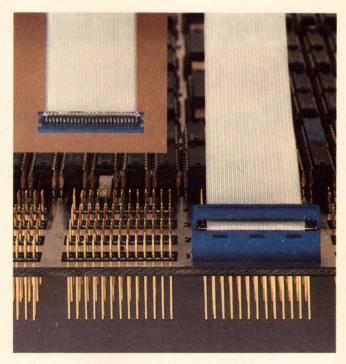

"TLC" connector-the fast way.

Assembly time and the cost of terminating transmission line cable are significantly reduced with Berg's unique "TLC" connector system. Completely eliminating the need for a paddleboard, the "TLC" connector reduces cable assembly time to seconds.

The connector's compact size provides greater signal fidelity and facilitates high-density packaging.

"TLC" connectors terminate any cable with signals on 0.050" centers. The ground wires are commoned on the buss bar allowing use of a wide range of cable designs with a variety of ground centers and diameters. Pre-deposited solder on the buss bar and signal tabs allow for mass reflow. This produces higher yields and further reduces assembly cost.

The "TLC" design uses Berg's proprietary PV\* receptacle, a connector of proven reliability for over a decade in data processing applications. The dual-metal construction of the "PV" provides a high

normal force to assure highly reliable mechanical and electrical performance.

"TLC" connectors mate with 0.025" pins or standard Berg headers on 0.100" grid to form a complete interconnection system.

Look to Berg for innovative research and development to meet your connector needs, today and in the future. For a brochure describing the "TLC" system, write or call:

The Du Pont Company, Berg Electronics Division, New Cumberland, Pennsylvania 17070. Telephone: (717) 938-6711.



#### Classified section for Engineering/Technical Employment Opportunities

CLASSIFIED SALES REPRESENTATIVES

Sales Manager-Mary Ellen Kearns-212/997-3306

# Electronics Engineers for Optical Communications Systems

# Exxon Optical Information Systems is leading the way...Join us!

We're the new and explosively growing division of Exxon Enterprises, Inc., recently a page one story in the New York Times, Electronic News and Computerworld for announcing the most comprehensive product line for semiconductor lasers. We are committed to developing lectro-optical components and systems which will revolutionize modern information processing. We're looking for uniquely talented people to help us exploit an unequaled edge product technology—people who get excited by developing a new industry instead of just working in it.

#### Analog Circuit Designer

MSEE or BSEE required. Duties include design, breadboarding and testing of discrete and integrated small signal wideband amplifiers and communication circuits. Reply Attention Department EF FS 1.

#### ■ Digital Circuit Designer

BSEE or MSEE required. Must have a working familiarity with MOS and bipolar logic families. Will be responsible for development of digital interface circuits required in apvanced data communication systems. Reply Attention Department EF FS 2.

#### ■ Communication Systems Designer

BS or MS in Physics or EE required. Duties include analysis of error rates and analog S/N. Also design of optimal coding schemes, data interfaces and protocols required in distributed data communication systems. Reply Attention Department EF ES 3

#### **■ Electro-Optical Systems Engineer**

BS or MS in Physics, EE or ME required, preferably with communications background to perform analysis and measurements of optical parameters for communications systems. Reply Attention Department EF FS 4.

#### ■ Manufacturing Engineer

BS in EE, ME or Physics required. Will be responsible for implementation and fabrication of circuit and system designs. Position requires experience with printdd circuit card, and hybrid chip assembly processes. Reply Attention Department EF FS 5.

Qualified applicants may send a confidential resume including salary history/requirements to: Employee Relations, Optical Information Systems, Exxon Enterprises, Inc., 350 Executive Boulevard, Elmsford, N.Y. 10523

# Optical Information Systems EXON Enterprises Inc.

We are an equal opportunity employer, m/f

#### **POSITIONS VACANT**

Electronic Engineers. Several manufacturers in the Pacific Northwest require staffing. Microprocessors, analysts, programmers. Salaries open. Send resumes to: National Personnel Service, Box 537, Edmonds, WA 98020. No fees.

Engineers and Designers—Florida positions urgently need electronic experience. PCB, Analog, Electronic PCB, Analog, Electronic experience desired. Permanent or long term contract positions. All fees paid. Salaries 15K to 30K. Rush confidential resume and earnings history to: J. C. Dayvault, President, R. P. Rita Inc., 1211 N. Westshore Blvd #107, Tampa, Florida 33607.

Electronics Engineers—All Disciplines, Computer, Analog, Digital, Manufacturing, Control Systems. Openings nationally for design applications and sales—\$20.40K fee paid. Resumes with salary history to C. Robin, P.E., Dunhill Tech Search, 182 Forbes Broad, Braintree, MA 02184—(617) 848-6320

#### **FACULTY POSITIONS VACANT**

Electronics Instructor. Electronics
Technology Instructor for 2 year
Associate Degree program. Masters
degree in electrical engineering
preferred. Minimum of 5 years field
and/or teaching experience required.
Basic electronics plus communications, digital systems, microprocessors and instrumentation.
Position begins August 20, 1979.
Send letters of applications to Vice
President of Academic Services, Lincoln Land Community College,
Springfield, IL 62708. Equal Opportunity Employer.

#### **EMPLOYMENT SERVICES**

M.E.s, I.E.s, E.E.s, Ch.E.s—Let our search firm represent you to our clients in Northern Calif. If you are seeking a more prestigious position with increased responsibilities and a better Future, send a resume or request a position profile and at no charge we will provide you with interview opportunities. Register in our exclusive Executive Search Program. All replies strictly confidential. All Fees employer paid at Management Recruiters, 1900 Point West Way, Suite 281, Sacramento, CA 95815. (916) 920-0441.

### **ICAO Seeks Aviation Specialists**

#### THE CHALLENGE

Over the next six months we will be hiring more than 170 aviation specialists for short and medium-term assignments in Africa, Asia, Latin America and the Middle East.

We are looking for very expert, very experienced technical specialists who have good academic degrees or equivalent high professional qualifications, together with a minimum of ten years practical aviation experience, at least half of it in the specific area of specialization. Obviously with this experience requirement we don't expect applicants to be much below the age of 35. There is no upper limit as long as you are young in spirit and in good health.

#### THE ORGANIZATION

We are the International Civil Aviation Organization (ICAO), and we administer a technical assistance operation funded in main part by the United Nations Development Programme. Our expenditures this year will be close to (U.S.) \$50 million, and we shall be helping more than 75 developing countries.

#### **THE JOBS**

We are looking particularly for *electronics engineers* and *electronics technicians* (technical officers) who are highly qualified in one or more of the following fields:

- -Aeronautical Communications
- -Aeronautical Radar
- -Aeronautical Navigation Aids


#### THE TERMS

We pay good salaries, ranging from (U.S.) \$28,000 to \$44,000 before taxes, depending upon the job. The cost-of-living allowance depends on the duty station. For example, currently for an expert with dependents: \$12,940 to \$17,730 in Jordan and Venezuela; \$7,470 to \$10,240 in Nigeria; \$6,370 to \$8,740 in Malaysia. Plus: Installation grants, travel for dependents, education grants, and six weeks leave per year with home leave after two years.

If you have the necessary experience and ability, and if you or your employer would like to help a country develop its citizens and resources—while you accumulate valuable international experience—send your resume to:

Technical Assistance Recruitment
International Civil
Aviation Organization
1000 Sherbrooke Street West
Montreal, Quebec, Canada H3A 2R2





# Instant, Toll-Free, Around-The-Clock, 7-Days-A-Week, Response To Your Inquiries

The little 800 telephone symbol (similar to the larger version above) inserted in some of the advertisements in this classified section, is a toll-free inquiry service to our readers.

To find out information about any ad you're interested in, just call 800-257-7850 (in New Jersey 1-800-322-8650) and give the operator the numbers underneath the phone symbol.

That's all you have to do to take advantage of this instant, toll-free, seven-days-a-week, around-the-clock, service.

# **Electronics**

Post Office Box 900 New York, NY 10020

#### LSI/MOS MEMORY DESIGNER

Sandia Laboratories is seeking an experienced MOS memory IC design engineer with MS or PhD degree in Electrical Engineering to work on a family of microprocessor support chips with major emphasis on memory elements. Candidates should be familiar with design, simulation, analysis, and layout techniques, and have the ability to effectively communicate ideas to other IC designers and processing personnel in Sandia's state-of-art processing laboratory.

Sandia Laboratories is a large engineering and physical science R&D Laboratory located in Albuquerque, New Mexico, between the Rio Grande valley and the Sandia mountains. The stimulating work environment, great climate, and a beautiful city in which to live, produce a unique job opportunity.

Please forward resume to:
A.J. Fuller
Staff Recruiting Coordinator
Division 3531
Sandia Laboratories



225

Albuquerque, New Mexico 87185

Applicants must be citizens of the United States, and must be able to obtain a DOE Security Clearance.



Sandia Laboratories

Equal Opportunity Employer Male/Female

Electronics/June 21, 1979

Rubber/Plastics Industry Oriented

#### Supervise Development of **Computer-Based Data Acquisition** and Process Control Systems

You will be working at the General Tire Research Center where we're involved in much more than tire technology. General has many non-tire products - vinyl wallcoverings, seating materials, polyurethane foams, tennis balls, automotive body and suspension components, closed cell extrusions, etc. - literally thousands of products. This diversity offers exciting opportunities in materials and process research.

You will direct an interdisciplinary professional team in developing specific methodology, applicable hardware, software, data acquisition, instrumentation and control systems for mini-computer/microprocessor control of rubber and plastics process operations.

For this position, you will need an M.S. or Ph.D. in Engineering, a knowledge of the rubber and plastics industry and at least 5 years experience in real-time computer applications. Experience and accomplishments are desired in design and application of digital systems for process control and data acquisition. Digital electronics experience should include the interfacing of mini-computers and microprocessors with sensors and other instrumentation to monitor experiments with the purpose of developing a model of the process.

This is a challenging position involving Section Head responsibilities and the opportunity to use creative talents developing systems from the ground up. Naturally, the total compensation plan is good, including generous benefits and significant continuing growth possibilities.

If your background, goals, and ambitions seem to match our needs, send your resume and salary requirements in total confidence to:



Dr. Jon S. Gerhardt, Manager **Technical Staff Development** THE GENERAL TIRE & RUBBER COMPANY Research Division 2990 Gilchrist Road Akron, Ohio 44305

An Equal Opportunity Employer M.F.

# HARDWARE INSTRUCTOR

#### Computer Based Education

Control Data Institute, an education division of Control Data Corporation, has outstanding opportunity's for Computer Technology Instructors in its Burlington, Massachusetts facility.

We are seeking talented persons who can meet the challenges of teaching in one of the nation's largest and fastest growing schools for computer training. Course equipment and materials are the best in the business.

- Qualified candidates will have:

  -Knowledge of electronics and computer systems; Bachelors

  - degree a plus. Experience in the maintenance and repair of computer systems & peripheral equipment in the military or field service. Knowledge of the educational process; teaching experience a

Control Data offers an excellent starting salary and benefits package including a tuition reimbursement plan. Interested candidates should write or call collect.

J. N. Powers
CONTROL DATA CORPORATION

20 Hickory Drive Waltham, MASS 02154 (617) 890-4600

CONTROL DATA CORPORATION

More than a Computer Company

An Equal Opportunity Employer M



National Research Council Canada

Conseil national de recherches Canada

#### MICROWAVE **BIOPHYSICIST**

The Division of Biological Sciences seeks a Research Scientist to investigate the effects of non-ionizing electromagnetic radiation (radio-frequencies through microwaves) on higher organisms. Additionally, the incumbent would advise and assist colleagues in biology in dosimetry measurements necessary for conduct of physiological experiments with opportunities for full collaboration in such work.


Preferred qualifications are: A PhD, sound knowledge of microwave physics and related instrumentation, and a demonstrated ability to vigorously and effectively perform independent research on biophysical problems.

Salary will be commensurate with qualifications



Please apply giving complete details of your education and experience, letters from referees, to the Employment Office, National Research Council of Canada, Ottawa, Ontario, K1A OR-6. In reply, please quote BY-

# THEY SAID IT COULDN'T BE DONE. WE DID IT.

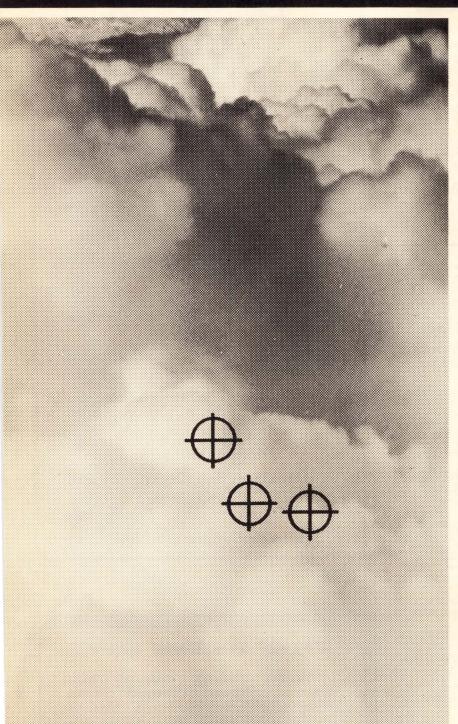

Can radar reduce pilot workload during all phases of Navy or Marine Corps air-to-air or air-to-surface missions?

Our radar for the F/A-18 Hornet has to do just that. For starters, it has to pierce the thickest weather, the deepest night.

It has to ferret out enemy targets at long range.

It has to provide automatic acquisition of multiple targets, automatic navigational help, and automatic weapons delivery.

It has to make possible hands-off, head-up, oneman operations for dogfights or ground attacks.

Our AN/APG-65 radar also has to be super reliable (106 hours guaranteed mean time between failures). And occupy only 4.37 cu. ft. of space. And weigh only 338 lbs.

Once again, the Hughes Radar Systems Group is doing what can't be done. Just as we do in building the weapon system for the Navy's F-14 Tomcat. And the radar for the Air Force's F-15 Eagle.

Because we keep delivering, we keep getting even harder new challenges thrown at us. And so we keep having new openings. For the kind of engineers who make breakthroughs happen.

If you're one of these uncommon people, we'll ask a lot of you. We'll also offer you a lot in return.

We offer you the stability of a company with over 1,500 on-going programs.

We offer you the professional environment of a company run by engineers for engineers.

We offer you a choice spot in our brand new ultramodern Engineering Building. Read about it elsewhere in these pages.

Does this sound too good to be true? Nearly 2,000 engineers in our Radar Systems Group know it's not. At Hughes, nothing is impossible. If you feel that way about things, we'd like to hear from you.

We have openings now for Systems Analysts, Software Engineers, Hardware Engineers, Production Engineers, Quality Assurance Engineers, and many others. Write: Professional Employment, Dept. EL, Hughes Radar Systems Group, 2060 Imperial Highway, El Segundo, CA 90245.





U.S. Citizenship Required. Equal Opportunity M/F/HC Employer.

# WANTED: ENGINEERS WHO DON'T KNOW IT CAN'T BE DONE.

Electronics/June 21, 1979

# ENGINEERS SOLID-STATE POWER CONVERSION

The Advanced Product Development Division of Allen Bradley Company is seeking engineers in all phases of solid-state power conversion. We're offering highly visible positions within a unique and dynamic organization with attractive opportunities. Our present needs include:

#### Senior Project Engineers

You'll be working on the development of advanced power conversion equipment with primary application to AC motor control. Responsibilities include overall system design and the coordination of electronic design engineers. The successful candidates will have a working knowledge of variable speed motor controls, multi-variable feedback systems and power semiconductors. Design experience with analog IC's and digital logic is required. Familiarity with microprocessor controllers is desirable. You should have 8-10 years experience and have demonstrated a high level of achievement with minimum supervision. BS degree in EE required, MS desirable.

### Electronic Design Engineers

We need creative engineers with extensive hands-on experience developing power conversion circuits, dedicated analog and digital feedback control circuits, or microprocessor based real-time controllers. You will be working on the development of state-of-the-art inverter circuits and systems in small project teams, working under minimum supervision. Familiarity with electromagnetic machine fundamentals and computer-aided design is also desirable. BS degree in EE and 3-5 years experience is required. MS desirable.

We are located in Milwaukee, Wisconsin, a metropolitan area with many cultural activities, excellent schools, major league sports, and we are within minutes from lakes, state forests, and many other attractions that have made Wisconsin a top vacationland and an exciting and friendly place to live. These highly visible positions offer technical challenge along with a generous salary and benefits package.

For immediate and confidential consideration, please submit your resume with salary history to:



#### ALLEN-BRADLEY

Manager, Salaried Employment ALLEN BRADLEY COMPANY 1201 So. 2nd Street Milwaukee, WI 53204



AN EQUAL OPPORTUNITY EMPLOYER M/F

Engineering



## ENGINEERS

\$24,300 to \$29;300
THE CITY OF DETROIT OFFERS
CHALLENGING ASSIGNMENTS
IN WASTEWATER TREATMENT AND WATER SUPPLY

- Opportunities for Civil, Electrical, Industrial, Mechanical and Structural engineers with specialty backgrounds in water and sewage treatment in one or more of the following areas: computerized process control, preparing and monitoring contract documents for treatment works, structural designing treatment facilities, design of processing machinery, electrical motor design, inplant power distribution and technical report writing.
- Excellent benefits.
- Opportunities for personal and professional growth in a sophisticated urban environment.

Candidates with P.E. registration in the State of Michigan or states having reciprocity with the State of Michigan are preferred.

Applications will be accepted from engineers without professional registration for possible future vacancies.

Send resume in complete confidence or telephone:

Mr. Gregory Leslie
Detroit Personnel Dept.
314 City-County Bldg., Detroit, MI 48226
(313) 224-3717

A Merit System and Equal Opportunity Employer



#### Why not an editorial career?

ELECTRONICS has available challenging editorial positions for electronics engineers who can combine aggressive curiosity, writing ability and technical know-how into a rewarding career as an editor in New York. Candidates should have a BSEE and design experience. We offer excellent salary and fringe benefits. Send your resume to the:

**Executive Editor** 

#### **Electronics**

1221 Avenue of the Americas, New York 10020

Unlock your career with one of these "KEY" opportunities on the San Francisco Peninsula

# RADAR AND **ECTRONIC** ROFESSIONALS

Call our TOLL-FREE, 24-hour number (800) 821-3777, ext. 710 (Missouri residents call (800) 892-7655, ext. 710)

Dalmo Victor continues to excel as the leader in design and manufacture of state-of-the-art Digital Radar Warning Systems. If you've been anxious to "Unlock" your career, and join a company on the move, perhaps now is the time to investigate the exciting opportunities available with Dalmo Victor. We invite talented professionals to join us in the most advanced aircraft defense system available in the free world today. "KEY" opportunities exist in the following disciplines.

You will be responsible for assuring that engineering programs are pro-ducible in regard to electronic spec outclose in regard to electronic spec compatibility, electronic test equip-nent and test methods. You will also support the Production Test Depart-ment in the resolution of electronic design problems on production programs. Requires previous experience with Radar Warning Systems or related fields, and a BSEE (or

Systems Engineers

Individual must have the ability to research, organize and write opera tional maintenance overhaul and test tional maintenance overhaul and test procedure manuals using the latest military specifications. Must have 2-3 years' recent experience as a Technical Writer and must possess ability in both digital and RF elec-

Senior Technical Writer

Prepare maintainability program Prepare maintainability program plans; conduct design reviews for maintainability and prepare appor-tionments and predictions. Duties will include failure analysis demonstration test and corrective action recommen-dations. Qualified candidates will be degreed, BS/MSEE desired with 2-4 years' applicable experience in military airborne and ground equip ment.

Maintainability **Engineers** 

and experience in our Calibration aboratory. Calibrate and repair test ladoratory. Calibrate and repair test equipment used for acceptance on company products. Specifically, you will troubleshoot, repair, and calibrate electronic instrumentation devices, computers and computer peripheral equipment.

ay is commensurate with level of ex- (Precision Measuring Equipment)
perience and knowledge. Opportunities for advancement are exliteratives. cellent since we have our largest pro-duction background in history.

**Electronic Calibration Technicians** 

Successful candidates must be capable of performing and/or spervising preparation of reports on circuit stress analysis, reliability predictions, program plans, pro-posals, design review and failure analysis. Our expanding programs in our integrated Logistics Support Department offer key opportunities for individuals with BS/MSEE and minimum 4 years' experience or aerospace programs

**Reliability Engineers** 

Ability to edit preliminary technical orders and similar narrative technical data items and to perform quality inspection on all contractual data items. Requires familiarity with DD-1423 requirements, data item descriptions (TD-3) and MIL-5PECs and standards. Must have 2-3 years; similar technical experience and a thorough knowledge of good editorial practices.

**Senior Technical Editor** 

#### **EXTRA BENEFITS**

"Unlock" your career now and enjoy an excellent salary and benefits package that includes RELOCATION ASSISTANCE; companypaid medical (for you and your dependents); company-paid retirement programs; stock purchase plans; 13 paid holidays; and educational reimbursement. You'll also enjoy western living at its best with fine schools, pleasant year 'round weather, beaches and mountains nearby, plus easy access to San Francisco and San Jose.

For immediate consideration, please call our TOLL-FREE number (800) 821-3777, ext. 710. (Missouri residents call 800-892-7655, ext. 710). If unable to call, please submit resume (or letter of interest) to the Director of Product Assurance, Dept. 862, Dalmo Victor, 1515 Industrial Way, Belmont, CA 94002. U.S. citizenship required. An equal opportunity employer, M/F

> DALMO VICTOR OPERATIONS Bell Aerospace TEXTRON



# WHAT DOES EMERSON ELECTRIC COMPANY HAVE TO DO WITH TANKS?

#### PLENTY.

Through our Electronics and Space Division, we designed and developed the M901 Improved TOW Vehicle, anti-tank missile system.

The need was for a weapon that could be fired from a fully covered and crewprotected position. The solution was a retractable launcher which could be operated from within the armor protection of the vehicle and fired even when in full defilade.

What does Emerson Electric Company have to do with you? Plenty.

It's projects such as this that make the E&S Division of Emerson an exciting place to work and grow. Come join us. We're looking for career-minded electronic and mechanical engineers who want to be an important part of the future

Join the Spirit of Emerson. Send your resume or call:




### Electronics - Space Division

Emerson Electric Co.

8100 W. Florissant St. Louis, Missouri 63136

An equal opportunity employer

# Creativity

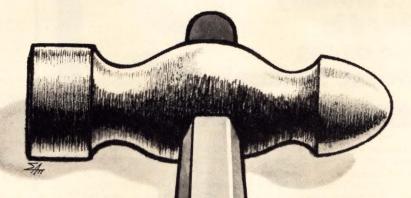

Begin with a mind that can see bold new relationships. Then add strong resources and a management receptive to new ideas.

At the ITT LSI Systems Support Center, we know the creative process needs all these things. That's why if you bring us your talents, we'll provide the latitude you need to express yourself and make things happen.

Our working environment, for example, has no departmental walls or isolated offices. Every member of our small high-caliber team has direct exposure to every phase of LSI design and development. Ideas are freely exchanged. Coffee breaks can turn into advanced clinics on LSI technology.

And while the work we're doing is so proprietary we can't give specifics, we can tell you that we're tackling the more complex large scale integrated circuit design assignments for telecommunications, space, defense, commercial, industrial, and automotive product areas throughout International Telephone and Telegraph Corporation.

Late this spring we'll be moving into new quarters near Milford, Connecticut where we'll have 20,000 square feet all to ourselves

and the latest resources at our command—including digital and linear test systems, SEM for failure analysis, environmental test equipment, computer and graphic systems . . . and wafer fabrication facilities at ITT's nearby Corporate Technology Center.

Our new location also offers the best in Connecticut living, near Long Island Sound and New Haven—and almost midway between New York and Boston.

If you're a bold thinker who wants to be seen and heard, get in touch with us. We have opportunities at various levels for:

- Process & Device Specialists
- LSI and VLSI Design Engineers
- Linear IC Designers
- LSI Layout Designers
- LSI Applications Engineers
- Digital & Linear IC Test Engineers
- Reliability & Quality Engineers

Call collect to arrange interview: (203) 348-8855, Monroe Weiant, Assistant Director—Operations.

Or send resume including salary history in confidence to Mr. Eugene A. Edwards, Caller Service 1-14, Milford, Connecticut 06460

# LSI SYSTEMS SUPPORT CENTER

An Equal Opportunity Employer, M/F



**ENGINEERS/SCIENTISTS:** 

You'll like working at Lockheed in Sunnyvale on the San Francisco Penins



Lockheed Missiles & Space Company is a name worth remembering. Our Career opportunities have never been better for professionals eager for a challenging, responsible, meaningful environment. Your talents will expand with the diversification of programs we have to offer, and your lifestyle will be pushed to its limit, with nearby beaches, ocean fishing, boating, wine country, fine schools, theaters, sporting events, and our year 'round sunny, fresh air atmosphere.

Investigate the following opportunities available at Lockheed:

- Guidance & Control Systems
- Advanced Communications Systems
- RF Antenna Engineering
- Scientific Programming and Analysis
- Electro-Optical System Design and Analysis

- Test Equipment Design
- Reliability Engineering
- Radar Systems
- Applications Programming
- Software Systems Development
- Signal Processing Systems
- Digital Circuit Design
- Microelectronics

Most of these positions require an appropriate degree. Several positions offer opportunities at all levels. Interested?

For immediate consideration, please forward your resume to Professional Employment, Dept. Elec-67, P.O. Box 504, Sunnvale, California 94086, or call weekdays collect at (408) 743-2200. We are an equal opportunity affirmative action employer.



LOCKHEED
MISSILES & SPACE COMPANY

#### **BUSINESS OPPORTUNITIES**

Become a Consultant. Earn \$20-\$40/hr being in business for your-self. For detailed information on starting or expanding your own engineering consulting business write Dr. S. Tomczak ST&A Dept. ES Box 480530 Los Angeles, CA 90048.

How To Earn Money As A Consultant (including specimen contracts) \$25. Business Psychology Int'l. 890/44 National Press Bldg., Washington, D.C. 20045.

#### **POSITIONS WANTED**

Would You Hire an Aussie? Electronic engineer with bachelor degree and 3 years basic experience in Australia wants career in dev. electronic products or components in area of Concord, N.H. Permanent resident July, 79. Resume and references available. P. Dickerson, RFD #2, Bo 215, Lubec, ME 04652.



#### **Engineer**

If you're a talented engineer seeking an environment that emphasizes personal growth through teamwork, consider a career with Hewlett-Packard. Our Corvallis Division is responsible for the development and manufacture of advanced personal computing products and we currently have a challenging opportunity in the following area:

#### **MOS ENGINEER**

Working in our product R&D Lab, you will have total responsibility for MOS Design from logic through debug. To qualify, you must have a basic understanding of MOS, logic and analog circuits. We would prefer an EE who has been responsible for at least one LSI design.

At Hewlett-Packard, you'll enjoy such benefits as promotional opportunity, cash profit sharing, company-paid retirement, educational assistance, flexible working hours, stock purchase plan and medical, dental and life insurance.

Please send your resume in confidence to: Diane Pugh, 1000 N.E. Circle Boulevard, Corvallis, OR 97330. We are an equal opportunity employer dedicated to affirmative action.

H-P and You in Oregon

HEWLETT PACKARD

Tennessee Eastman Company's Research Laboratories in Kingsport, Tennessee, needs an experienced electronics engineer for a broad range of "hands-on" and developmental engineering. The work is related to the performance, reliability, and improvement of electronic instrumentation used for chemical and physical analyses and for the processing of materials. Duties include servicing scientific instrumentation, designing instrument-computer interfaces, and developing micro computer applications for automation.

Candidates should have a B.S. degree in

Candidates should have a B.S. degree in Electrical Engineering and "hands-on" experience with instrumentation and computers. The ideal candidate will enjoy the challenges of analyzing instrument failures and restoring optimum performance as well as developing electronic systems for automation. Please send resume to: Mr. M.F. Lowe, P.O. Box 511, Tennessee Eastman Company, Kingsport, TN 37662.

An Equal Opportunity Employer



Numerous immediate openings esp. Electronic Design and Power oriented EEs All resumes confidential to

Don Norris, 425 Electronics Parkway, Liverpool, NY 13088. (315) 451-4220



"WE PLACE ENGINEERS"

# Plug Into Our Electronics Opportunities.

When you plug into General Dynamics' Electronics Division, you get more than a challenging job, good pay and fringe benefits for you and your family. You get San Diego, one of the country's most beautiful cities. With miles of clean beaches, year-around golfing, sailing and tennis, and an average temperature of 68°, San Diego is one of America's most desired living areas.

As a Design Engineer you will find a broad selection of opportunities in a variety of technical areas: Automatic test equipment for the F-16. High-resolution, helicopter-borne radar systems. Satellite-based, world-wide navigational aids. Plus other projects for military and space programs.

If your career needs challenge, stimulation or just a change of scenery, contact us immediately.

### AUTOMATIC TEST EQUIPMENT

Automatic test equipment design including analog measurement, analog stimulus and digital subsystems.

Requires BSEE/MSEE and 2-5 years design experience. Analog design background preferred.

### DISPLAY SYSTEMS DESIGN

Responsible for the configuration of display systems to meet customer requirements. Requires experience in areas of customer interface and proposal preparation, as well as display logic design or display analog circuit design.

# ELECTROMAGNETIC COMPATIBILITY ENGINEER

Provide EMC support in development of electronic equipment and tracking navigation systems. Minimum of 2 years experience in system EMC analysis, EMC design, and equipment/ system EMC testing is required; EMP and/or TEMPEST experience is desirable. Minimum BS degree with background in electromagnetic bonding.

#### RF DESIGN

Engineering specialist to head new airborne radar design group. Requires strong technical/proposal experience and analytical background. MSEE required.

Principal engineer for radar section requires technical/proposal and "hands on" experience. MSEE required.

#### HARDWARE/ SOFTWARE DEVELOPMENT

Work in field of digital image processing and display. Background in systems analysis such as error budget calculation helpful. Requires microprocessor familiarity and BSEE, Physics or Math degree.

#### DIGITAL DESIGN

Responsible for the design and special computer and transponder interfaces, display logic and microprocessor multifunction transponders used in sophisticated tracking systems.

All positions require at least a technical BS degree and 2-5 years experience.

Excellent benefit program includes life insurance and medical program, dental and prescription drug plans, savings/stock investment and retirement plans.

For immediate attention, call our 24-hour TOLL FREE number:

800-257-7850



Or, rush your resume to: L.E. Heizer, Vice President, Research & Engineering, GENERAL DYNAMICS Electronics Division, Drawer RC, Mail Zone 7-32, P.O. Box 81127, San Diego, CA 92138.

# GENERAL DYNAMICS Electronics Division

An Equal Opportunity Employer M/F/H

**Electronics** / June 21, 1979 233

engineering

# research... discovery...

...it's the world of ECM.
It's our world here at Northrop Defense Systems Division.

And it's a world to which you should aspire.

If you're intrigued and inspired by the new, the innovative, the state-of-the-art...you'll want to know that we at Northrop have committed ourselves to these ideals for the past twenty-five years. They've led us to our position as a renowned leader in the research, design and manufacture of sophisticated electronic countermeasure (ECM) systems.

By maintaining an environment that encourages creative freedom, coupled with our consistent procurement of long-term contracts and outstanding financial compensation — we've succeeded in building one of the finest engineering teams in the world.

But we need YOU. If you're trained and experienced in one of the following areas, investigate the potential at Northrop:

# **ENGINEERS**

#### PRODUCT DESIGN

SENIOR ENGINEERS PROJECT ENGINEERS ENGINEERS

PRODUCT ASSURANCE

RELIABILITY
MAINTAINABLITY
QUALITY ASSURANCE

SOFTWARE

ENGINEERS ANALYSTS PROGRAMMERS

#### SYSTEMS

SENIOR ENGINEERS PROJECT ENGINEERS ENGINEERS

#### **AUTOMATIC TEST ENGINEERS**

DIGITAL TEST ANALOG TEST RF (MICROWAVE TEST)

RF (MICROWAVE TEST)

We offer outstanding compensation packages including complete benefits, unlimited growth potential and the op-



vee orier outstanding complete benefits, unlimited growth potential and the opportunity to combine the career of a lifetime with off-hours enjoyment in Chicago, one of the most exciting, culturally alive and highly liveable areas in the nation. For further information, please forward your resume stating salary history and requirements, in confidence, to:

Employment Manager, Dept. E679
NORTHROP CORPORATION
Defense Systems Division
600 Hicks Road
Rolling Meadows, IL 60008

equal opportunity employer m/f



## Systems Engrs. Data Processing Electronics

Salaries to \$46,000 Manufacturing Engrs. ECM Engrs. Tool Design Engrs Air Traffic Contr!. Syst. Engrs. Rotating Devices Engrs. Thermometric Engrs Digital CKT Design Engrs. Power Systems Engrs. Sr. Military Systems Engrs. Field Engrs. (Electronic Equip. Digital Systems Engrs. Production Control Programmers/Mgrs. QA and/or QC Engrs. Technicians Companies Assume Our Fees. Submit Resume, Call or Visit: THE ENGINEER'S INDEX 133 Federal Street, Suite 701 Boston, Massachusetts 02110

# CALIFORNIA INSTITUTE OF TECHNOLOGY

Telephone (617)482-2800

Research Fellow position in the Power Electronics Research Group, to contribute to theoretical and experimental studies of switching-mode converters and regulators. Ph.D. required, with experience in the field. Apply to: Professor R. D. Middlebrook, 116-81 Caltech, Pasadena, Ca. 91125. An Affirmative Action/Equal Opportunity Employer.

#### NATIONWIDE ELECTRONICS PLACEMENT -

Digital Ckt Dsgn \* Hardware Sys Dsgn Analog Ckt Dsgn \* Software Sys Dsgn Quality Reliability \* Test Equipment Mtnce Entry Level through Management All Fees are Exclusively Employer Paid

#### E. J. STEPHEN ASSOCIATES

1601 Concord Pike, Suite 86, Wilmington, DE 19803

#### SUN BELT MGRS. & ENGRS.— Electronic & Electrical

Enjoy living in the energy rich South/Southwest. Confidential representation. 25 years' industry experience.

#### JOHN WYLIE ASSOCIATES, INC.

Professional Recruitment Consultants 522 S. Boston, Tulsa, OK 74103 (918) 585-3166

Engineers—SE Locations, Process, Power Light, Software, Hardware, Systems, Instrumentation, Facilities. Fee Paid, No Contracts, 12 yrs. experience. Send resume to Ted McCulloch. Beall Associates

P.O. Box 5042 Spartanburg, S.C. 29304

#### ELECTRONIC ENGINEERS

Nationwide opportunities are available to talented & degreed Electronic Engineers looking for a career. Reply in confidence to Stu Hopard for prompt & confidential service.

TAFT Personnel Agency 521 5th/43St, NYC 10017 212-697-0100

# NOTICE **EMPLOYERS:**

# Why we can recommend our readers for the top jobs

The subscribers to this magazine have qualified professionally to receive it. They are also paid subscribers—interested enough in the technological content to have paid a minimum of \$15 for a subscription.

As subscribers to ELECTRONICS, our readers have told you several things about themselves. They are ambitious. They are interested in expanding their knowledge in specific areas of the technology. And they are sophisticated in their need for and use of business and technology information.

Our readers are now in senior engineering or engineering management, or they are on the road toward those levels. In either case, they are prime applicants for the top jobs in almost any area.

If you are interested in recruiting the best people in electronics, these pages are open to you for your recruitment advertising.

Our readers are not "job-hoppers". To interest them you will have to combine present reward with challenge and opportunity for future career advancement.

The cost of recruitment advertising on these pages is \$65 per advertising inch. For information call or write:

### ctronic

Post Office Box 900, New York, NY 10020 Phone 212/997-2556



#### THE DOGGONE SEARCH IS ON AT CPI FOR ELECTRONIC SPECIALISTS!

Computer Peripherals, a subsidiary of Control Data Corporation and specialists in developing peripheral equipment for the computer market, is tracking top talent to keep up with our rapid expansion. We're ideally located in the City of Rochester, a pleasant suburban community nestled in the rolling hills of Southeastern Michigan. Join Us! You'll appreciate our stimulating professional environment and numerous constitutions for advancement. opportunities for advancement.

#### **ELECTRICAL ENGINEERS**

To design power supplies - both linear and switching solenoid drivers, analog and digital circuits, AC power and servo-mechanisms. Requires BSEE, plus general knowledge of micro-processors and 3 years experience in circuit design.

#### ELECTRONIC ENGINEERS

Responsible for the design, development and implementation of responsible for the design, development and implementation or automated test and test systems for printer products, printed circuit boards and printer sub assembly. Requires 3-6 years experience, plus BSEE and fluency in INTEL 8080 micro-processor hardware, assembly language and PLM80. Senior position requires 4 years experience in designing digital and linear electronic circuits for product test wear or equivalent.

We offer competitive salaries and comprehensive benefits. For prompt and confidential consideration, please forward resume and salary history to:

#### George Coddington

#### COMPUTER PERIPHERALS INC.

a subsidiary of CONTROL DATA CORPORATION

1480 N. Rochester Road Rochester, MI 48063

Affirmative Action Employer



#### **CREATIVE** DIGITAL SYSTEMS **DESIGNERS**

#### Take Heed!

- Are looking to grow and develop with a small (1978 sales \$85 mm) state-of-the-art company.
- Are currently making less than \$30 K and would like to be earning more.
- Have a minimum of 2 years experience,
- Have a BSEE degree,
- Are ready to assume project responsibility for new products,
- Have been involved in microprocessor applications,
- Have a strong digital design background,
- Are frustrated by limited advancement potential and are looking for a place to excel,
- And, consider a stimulating living environment particularly important to your happiness and mental well-being.

CALL US at our toll-free number immediately for you have found the needle in the hay-stack!



SAN FRANCISCO 50 California St., Suite 3255 San Francisco, CA 94111 (415) 981-7000

HOUSTON 5373 W. Alabama, Suite 307 Houston, TX 77056 (713) 961-5700

800-257-7850 or send resume in strictest confidence to:



313R

DALLAS 10300 North Central Expwy. Meadow Park Central, Bidg. 5 Dallas, TX 75231 (214) 691-3900

BOSTON 300 Bear Hill Road Waltham, MA 02154 (617) 890-3500

All fees assumed by our client company

#### The biographies of 5,240 of your colleagues...

# Profiles the Top Management of Major Electronics Firms throughout the World —and more

McGraw-Hill's

#### **Leaders in Electronics**

Prepared by the Staff of Electronics 651 pages


This is the only reference devoted solely to biographies of the most influential people in electronics: corporate executives... technical managers...designers and developers of important products and processes...government and military officials... academics...editors and publishers...securities analysts... directors of trade and professional groups...and consultants.

#### As easy to read as any professional publication in electronics

With LEADERS IN ELECTRONICS on your bookshelf, you no longer have to search through many different sources for biographical data on your colleagues. What's more, you don't have to strain your eyes reading minuscule type, nor do you have to waste valuable time trying to decipher seemingly endless paragraphs of abbreviations. Boldface type spotlights the various information categories so that you can scan entries rapidly to pinpoint what you need.

#### **Unique convenience feature...**Index of biographees by affiliation

A special 80-page index lists individual organizations alphabetically, complete with the names and titles of top employees. By looking up the names in the general biography listing, you can get a complete profile of the organization's top management in a matter of minutes. **Plus** an easy-access listing of independent consultants in every electronics specialty.

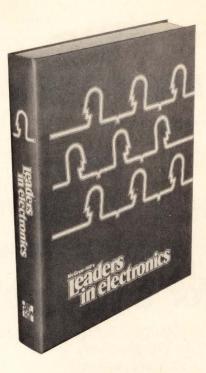

#### Sample Listing

Jones, John J

Chmn & CEO, Microprocessor Div of Computers Inc, 1023 W Warner Ave, Dayton, OH 45479, Tel (513) 555-2000. Born: Mar 26, 1926, Philadelphia, PA. Education: MBA, Harvard Business School, 1950; BSEE, Univ of Ill., 1946; PhD (Hon), Yale Univ, 1977. Professional Experience: Natl Bur of Standards, 1956-74, Adm Eng; Litton Ind, 1954-56, Sr Eng; NCR Corp, 1950-54, Eng. Directorships: Computers Inc since 1975. Organizations: IEEE since 1946, Sec Head 1972-73; AAAS since 1971; Midwest Ind Mgt Assn since 1974. Awards: Fellow, IEEE, 1977; Public Service Award, City of Dayton, 1976. Patents Held: 8 in computer circuits, incl Special Circuit for Microcomputer Chip Design 1975. Achievements: founded Microprocessor Inc 1974; project manager of first application of microprocessors for standard interfaces 1975. Books: 4 incl Small Circuits and Their Applications (editor), McGraw-Hill, New York, 1975. Personal: married 1950 to Mary (Smith), children John Jr, Jane Anne, Kevin. Residence: 344 W 34th St, Dayton, OH 45403, Tel (513) 555-4343.

#### Order today using this coupon!

Return coupon to: Leaders in Electronics P.O. Box 669 Hightstown, New Jersey 08520 (609) 448-1700, ext. 5494				energy Hill
Send me copy (copies) of Leaders in Electronics on a 10-day money-back guarantee. I understand that if I am not absolutely satisfied, I may return the book(s) within ten days at no further obligation. Otherwise, McGraw-Hill will bill me \$39.50 for each copy, plus applicable sales tax, shipping and handling charges.	Name Title Company Address City	State	Zip	
SAVE MONEY! Enclose payment in full, plus local sales Ten-day money-back guarantee still applies Check enclosed Bill me This offer subject to acceptance by McGraw-Hill.		oays all regular shipping and handlin  Company purchase order #	0	EL1

	Advanced Micro Devices 10, 1	1, 191		Electromask, Inc.	181		Jermyn Industries, Ltd.	87
	Alco Electronic Products	240						97
				Electronic Arrays	35		Keithley Instruments	
	American Optical Scientific Instrument Div.	184	•	Electronic Navigation Industries	3rd C.	*	Kontron Electronic Inc.	43
•	Amphenol North American Bunker Ramo 16. Corp.	2, 163		Elevam Electronic Tube Co. Ltd.	212	•	Krohn-Hite Corporation	5
	Analog Devices	203		Elorg Electronorgtechica	168		Leipziger Messeant	52
	Anritsu Electric Co. Ltd.	182		EMM/Semi	159	•	Leybold Heraeus GmbH	17E
•	Bausch & Lomb Scientific Optical Products	196		Enertec Schlumberger	6E, 15E		Litronix	104, 105
•	Bayer AG	43		Erie Technological Products	94		LRC Inc.	197
	Bell Laboratories	62-63		Exar	169	*	Massachusetts. Employment Impact Counsel	150, 151
	Berg Electronics	223		Fairchild Test Systems	12, 13		Matrox Electronic Systems	98
	Bourns Inc.	4th C.		Fairchild Semiconductor Operations Div.	75-79		Matsushita Electric Trading Company	158
	Brown Boverie & Cie	16E		Ferranti-Packard Ltd.	216		MDB Systems	170
	Bud Industries 195, 19	7, 199	<b>‡=</b>	First Computer Corporation	9		Memory Devices Ltd.	20E
••	Burr Brown Research Corporation	167		Fluke, John Mfg. Co.	102, 103		Microswitch Division of Honeywell	17
	Burroughs	128		Fujitsu Limited	154		Microtechnical Industries	208
	Bussman Mfg. Div., McGraw Edison Co.	200		General Electric Semiconductor Dept.	177		Mitel Semiconductor Inc.	48
	Calma	217		Gould Inc./Instruments Oscilloscopes	180		Molex Incorporated	10E, 11E
	Cherry Electrical Products	32		Gould, Inc. / Instrument Systems Div.	15		Mostek Corporation	27, 29
	C.P. Clare & Co.	213		Gulf Power Company	218		Motorola Inc. Component Products	208
	Computer Automation Naked Mini	18-19		Hewlett-Packard 2nd C., 1, 2, 60, 61,			Motorola Semiconductor Products	49, 50, 130
		193		92, 138	9, 183, 196		Murata Mfg. Co. Ltd.	166
	Conap, Inc.				211		National Semiconductor Corp.	36, 37
	Conrac Div./Conrac Corporation	221	•	Houston Instrument			at time	198
	Continental Specialties	38		Hybrid Systems	45		NCR	155
*	Cts Corporation	171			9, 100, 101		NEOHM SPA	
•	D.A.T.A. Inc.	208	**	IDA Ireland	154, 155	•	Nicolet Instrument Corporation	152, 153
	Data I/O Corporation	194	•	ILC Data Device Corporation	187		Non-Linear Systems, Inc.	220
•	Delevan Div/American Precision Ind.	6		Intel-Microcomputer Components	106		Norma Mebtechnik GmbH	13E
	Deltec Corporation	16		Interface Technology	241		Norplex Division UOP, Inc.	219
•	Dialight	189	•	International Rectifier Corp.	214		Ohio Scientific	25
	Digital Graphics Limited	166		Intertek	199		O.K. Machine & Tool Co.	242
•	Draloric	68		Intersil	91		Optron, Inc.	14
	Eastman Chemical Products	176		ITT Electro Optical Products	20, 21		Ovenaire	240
	Eastman Kodak Co. Graphic Markets Div.	156	*	ITT Cannon Electric	179	*	Panasonic Industrial Div.	167
	Elec-Trol Inc.	51		ITT North Microsystems Division	201		Paratronics, Inc.	220

**Electronics**/June 21, 1979 237

# Pay as you grow.

When you start to work, it's easy to spend your whole paycheck.

And that's a good reason to join the Payroll Savings Plan and buy U.S. Savings Bonds.

Because Bonds grow with you. So while you're working hard doing your job, Savings Bonds can be working hard doing their job. And that job is making money for you.

Bonds can help cultivate your dreams. Whatever they are. A college education, down payment on a new house, or a long-awaited vacation. Even a retirement nest egg.

Put U.S. Savings Bonds to work for you, storing away the fruits of your labor.

Plant the seeds of your future today. You'll be surprised what they can grow into.

E Bonds pay 6% interest when held to maturity of 5 years  $(4\frac{1}{2}\%$  the first year). Interest is not subject to state or local income taxes, and federal tax may be deferred until redemption.



Ad	A public and The	service of Advertisin	this publication g Council.	

	Perkin-Elmer Corp.	30, 31		TEAC Corporation	56
	Philips ELA	14E		Techsnabexport	212
	Philips Elcoma	19E		Tektronix	79
	Philips Elcoma Market Promotion	2E, 3E		Tektronix	85, 190
•=	Philips TMI	1E		Teledyne Philbrick	216
<b>‡=</b>	Philips TMI	67	*	Telequipment	8, 210
	Plessey Semiconductor	9		Telkoor	8
	Projects Unlimited	180		Teradyne Inc.	82, 186
	PTK Corporaton	242		Texas Instrument Components	149
	RAC Reliability Analysis Center	90		Thomson CSF Division D.T.E.	5E
	Recal Dana Instruments Ltd.	150, 151		Touch Activated Switch Arrays (TASA)	188
	Recal Recorders Ltd.	174, 175		TRW Cinch Connectors	172, 173
	RCA Solid State	7, 64	•	TRW Electric Components	22, 23
	Rensselaer Polytechnic Institute	8	*	US Instrument Rentals	87
*	Robinson Nugent Inc.	158, 159		Universal Instruments	165
	Rockwell International	54, 55	٠	Vacuumschmelze	4E
	Rockwell Microelectronic Device Division	202	*	Varo Semiconductor	68
•	Rohde & Schwarz	9E, 67		Vector Electronics	195
	Ernst Roederstein GmbH	205	•	Viking Industries	89
	Schweizer Mustermesse	241	••	Wavetek San Diego Inc.	171
	Semikron International Inc.	212		Western Digital	47
	Semtech Corporation	146		Wiltron	160, 161
٠	Sfernice	12E		Xylogics	90
	Siemens AG Munich	62	_	and I want when you is	No.
	Sigma Instruments Inc.	88	F.	lassified and employment adver J. Eberle, Manager 212-997-2557	
	Signetics Corporation	185	Be	len-Bradley Co. pall Associates	228 234
		,,,,	Ca	altech asey & Hanning omputer Peripherals Inc.	234 235
•	Sintrom	4E	Co	ontrol Data ilmo Victor	235 226
	SOAR Corporation	26	De	otroit, City of nerson Electric Co.	229 228 230 234
	Solid State Scientific	28	Ex	xon Enterprises Inc. pneral Dynamics pneral Tire & Rubber Co.	224 233 226
	Spectronics	95	He	wiett Packard ighes Aircraft Co. ternational Civil Aviation Organization	232 227 225
	Sprague Electric	59	Na	T LSI Systems Support ckheed Missiles & Space Co. Itional Research Council	231 232 226
	Standard Microsystems	207	Sa	orthrop Corp. India Laboratories ephen, E.J. Associates	234 225 234
	Statek Corporation	209	Te	ft Personnel nnessee Eastman Co. imbec	234 232 232
	Synertek	53	w	ylie, John Assoc., Inc.	234
				For more information of complete product line	see
	Syntronic Instruments Inc.	164		advertisement in the latest Electronics Buyers Advertisers in Electronics International Advertisers in Electronics domestic edition	
	Tau-Tron Inc.	178	_	and the state of t	

#### REPRINTS AVAILABLE FROM ELECTRONICS

No. of copies	R-805 Why and how users test micro-	R-424 Microprocessor applications
wanted Charts	processors 8 pp	28 pp
R-823 Communications satellites \$3.00	R-801 World market report 1978 24 pp	R-434 Designing systems with the stan-
R-516 Electronic symbols \$2.00	R-734 Microcomputer families expand	dard interface 12 pp
R-213 Electromagnetic spectrum (up-	20 pp	R-432 An update on communications
dated 1976) \$3.00	R-730 Special report — Automotive	satellites 8 pp
R-326 Optical spectrum (6-page report	electronics gets the green light	R-430 Choosing the right bipolar tran-
and chart) \$3.00	10 pp	sistor model for computer-aided
	R-724 Special report—Technologies	design 20 pp
	squeeze more performance from	
	LSI 22 pp	Books
Articles	R-722 Demands of LSI are turning chip makers towards automation	
	12 pp	R-819 McGraw-Hill's Compilation of Data Communications Stan-
All articles are \$3.00 each. Quantities of 5 or	R-718 Display makers strive to refine	dards—89 standards from 5
more in any combination are \$2.00 each.	their technologies 8 pp	organizations 1133 pp \$165.00
	R-716 Special report — Japanese wave	R-903 Personal Computing: Hardware
R-915 The race heats up in fast static	in semiconductor technology	and Software Basics - Electron-
RAMs 12 pp	24 pp	ics Book Series 266 pp \$11.95
R-913 Lithography chases the incredi-	R-714 Special report - active filter	R-803 New Product Trends in Electron-
ble shrinking line 12 pp	technology 6 pp	ics 1977—Electronics Book Se-
R-911 Transmitting data by satellite	R-712 Special report—large-scale inte-	ries 333 pp \$14.95
calls for special signal handling	gration 16 pp	R-732 Memory Design: Microcomput-
8 pp	R-710 Personal computers mean busi-	ers to Mainframes-Electronics
R-909 Special market series - Elec-	ness 8 pp	Book Series 180 pp \$12.95
tronics abroad 8 pp	R-708 So you want to be a consultant	R-726 Design Techniques for Electron-
R-901 1979 world market survey and	6 pp	ics Engineers: 293 time-saving
forecast 24 pp	R-705 Powering up with linear ICs	ideas in 48 chapters—Electron-
R-829 Special report: New networks tie down distributed processing	12 pp —— R-703 Special report — memories	ics Book Series 370 pp \$15.95R-711 Circuits for Electronics Engi-
concepts 16 pp	16 pp	neers: 306 circuits in 51 func-
R-827 Tackling the very large-scale	R-702 World market report 1977 24 pp	tional groups—Electronics Book
problems of VLSI: a special	R-614 Power supply choices for so-	Series 396 pp \$15.95
report 15 pp	phisticated designs 8 pp	R-31D Designer's Casebook Number 1
R-821 Codecs answer the call 18 pp	R-612 Fiber-optic communications	106 pp \$5.50
R-817 How bit-slice families compare	special report 24 pp	R-704 Thermal Design in Electronics 52
18 pp	R-610 Special report on hybrid-circuit	pp \$5.00
R-816 Packaging technology responds	technology 19 pp	R-701 Applying Microprocessors —
to the demand for higher densi-	R-526 How reliable are today's compo-	Electronics Book Series 191 pp
ties 9 pp	nents 16 pp	\$9.95
R-815 Higher power ratings extend V-	R-522 Special report on power semi-	R-608 Basics of Data Communica-
MOS FETs' dominion 8 pp	conductors 12 pp	tions-Electronics Book Series
R-813 Data-link control chips: bringing	R-514 Eight ways to better radio	303 pp \$12.95
order to data protocols 10 pp	receiver design 6 pp	R-602 Large Scale Integration—Elec-
plays 10 pp	R-512 Design of circuits for dangerous environments 4 pp	tronics Book Series 208 pp
R-809 New methods and materials stir	R-508 Designing microprocessors with	\$9.95R-520 Microprocessors—Electronics
up printed wiring 10 pp	standard logic 12 pp	Book Series 154 pp \$8.95
R-807 Here come the big, new 64-K		R-011 Computer-aided Design 135 pp
ROMs 14 pp	7 pp	\$4.00
Name and the same		
Payment must	<b>USE THIS PAGE AS YOUR OR</b>	DER FORM
accompany your order		1.0
	Cost of orders \$	Mail your order to: Janice Austin
Make check or money order payable to Elec-	Plus 10% handling charge \$ TOTAL AMOUNT ENCLOSED \$	ELECTRONICS REPRINTS
tronics Reprints. All orders are shipped	TOTAL ANIOUNT ENOLUGED	P.O. Box 669
prepaid by parcel post. Allow two to three	SEND REPRINTS TO	Hightstown, N.J. 08520
weeks for delivery. We will make any editorial		
reprint to order in quantities of 500 or more. For price list and additional information call	Name	
(609) 448-1700 ext. 5494.		
(000) 440-1700 ext. 0434.	Company	Dept
Back issues now available:		
1960 to 1969, \$5.00 each	Street	
1970 to 1973, \$3.00 each		
1974 to 1978, \$4.00 each	CitySta	teZip

#### OVENAIRE

...now, more than ever, your best bet for crystal oscillators.

Ovenaire's oscillator capabilities have been enhanced by the acquisition of W.H. Ferwalt, Inc.

- •STATE-OF-THE-ART HIGH STABILITY CRYSTAL OSCILLATORS with stabilities to 5×10<sup>-10</sup>/day and 7×10<sup>-11</sup>/°C.
- OVENIZED CRYSTAL OSCILLATORS  $3\times10^{-9}$  °C at low cost.
- •TCXO's with temperature stabilities to  $\pm 1 \times 10^{-7}$  0 to 50°C.
- DIP HYBRID CIRCUIT CRYSTAL **OSCILLATORS** with temperature stabilities to ±20 ppm.

...and, as always, your best bet for crystal and component ovens.

 ELECTRONIC CONTROL MINIATURE **OVENS FOR:** HC-18U, HC-25U, HC-42U, HC-43U crystals TO5 & TO8 crystal, transistor or IC 14 Pin & 16 Pin DIP IC.

Plus a complete range of ovens for commercial and military applications.


#### OVENAIRE-AUDIO-CARPENTER

KIDDE

706 Forrest St., Charlottesville, Va. 22901

804/977-8050 TWX 510-587-5461

Circle 240 on reader service card



The TPN Series subminiature pushbutton switches in combination with LEDs are directly compatible with PC board applications. The SPDT action provides flexibility for resetting or programming needs.

Another recent addition is a dual LED module, our TLD Series. Used in conjunction with other TT Series switches to form an array of all LEDs or LED and switch combinations. Choice of PC or Right Angle mounting. Terminals are fully gold plated. Red or Green LEDs available. Call Customer Service and ask for Free sample and a copy of our 164-page catalog.

ALCO ELECTRONIC PRODUCTS, INC. a subsidiary of Augat® 1551 Osgood St., No. Andover, MA. 01845 USA Tel: (617) 685-4371 TWX: 710 342-0552

#### **Advertising Sales Staff**

Advertising sales manager: Paul W. Reiss 1221 Avenue of the Americas, New York, N.Y. 10020 [212] 997-4371

Atlanta, Ga. 30309: Michael Charlton 100 Colony Square, 1175 Peachtree St., N.E. [404] 892-2868

Boston, Mass. 02116: Frank Mitchell 607 Boylston St

[617] 262-1160

Chicago, III. 60611 645 North Michigan Avenue Jack Anderson [312] 751-3739 Robert M. Denmead [312] 751-3738 Cleveland, Ohio 44113: William J. Boyle

Cross Mess, Calif. 92826: Robert E. Boedicker 3001 Red Hill Ave. Bidg. #1 Suite 222 [714] 557-6292

Dallas, Texas 75201: John J. Uphues 2001 Bryan Tower, Suite 1070 [214] 742-1747

**Denver, Colo. 80203:** Harry B. Doyle, Jr. 123 Speer Blvd. #400 [303] 837-1010

Detroit, Michigan 48202: Jack Anderson 1400 Fisher Bldg. [313] 873-7410

Fort Lauderdale, Fla. 33306: Michael Charlton 3000 N.E. 30th Place, Suite #400 [305] 563-9111

Houston, Texas 77002: John J. Uphues 601 Jefferson Street, Dresser Towe [713] 659-8381

Los Angeles, Calif. 90010: Robert J. Rielly 3200 Wilshire Blvd., South Tower [213] 487-1160 Minneapolis, Minn. 55435: Robert M. Denmead

Minneapolia, Minn. 55435: Robert M. Denmes 4015 W. 65th St. [312] 751-3738 New York, N.Y. 10020 1221 Avenue of the Americas John Gallie [212] 997-3616 Matthew T. Reseska [212] 997-3617 Philadelphia, Pa. 19102: Matthew T. Reseska Three Parkway.

Three Parkway [212] 997-3617

Pittsburgh, Pa. 15222: Matthew T. Reseska 4 Gateway Center [212] 997-3617

Rochester, N.Y. 14534; William J. Boyle Powder Mill Office Park, 1163 Pittsford-Mendon Rd., Pittsford, N.Y. 14534 [716] 248-5620

San Francisco, Calif. 94111: Don Farris Dean Genge, 425 Battery Street, [415] 362-4600

Paris: Patrick Mouillard 17 Rue-Georges Bizet, 75116 Paris, France Tel: 720-73-01

United Kingdom & Scandinavia: Simon Smith 34 Dover Street, London W1 Tel: 01-493-1451 Scandinavia: Andrew Karnig and Assoc.

Kungsholmsgatan 10 112 27 Stockholm, Sweden Tel: 08 51 68 70 Telex: 179 51 Milan: Ferruccio Silvera

1 via Baracchini, Italy Phone 86-90-656 Brussels:

23 Chaussee de Wavre Brussels 1040, Belgium Tel: 513-73-95

Frankfurt / Main: Fritz Krusebecker Liebigstrasse 27c, Germany Phone 72 01 81

Triotyo: Akio Saijo, McGraw-Hill Publications Overseas Corporation, Kasumigaseki Building 2-5, 3-chome, Kasumigaseki, Chiyoda-Ku, Tokyo, Japan [581] 9811

#### **Business Department**

Thomas M. Egan Production Director [212] 997-3140

Carol Gallagher

Production Manager International [212] 997-2045

**Betty Preis** 

Production Manager Domestic [212] 997-2908

**Thomas Kazich** 

Production Manager Related Products [212] 997-2044

Marieanne Meissner, Production Assistant (212) 997-2843

Frances Vallone

Reader Service Manager [212] 997-6057

#### **Electronics Buyers' Guide**

H.T. Howland, General Manager [212] 997-6642

Regina Hera, Directory Manager [212] 997-2544 **Thomas Kazich,** Production Manager [212] 997-2044

Marieanne Meissner, Production Assistant [212] 997-2843 Frances Vallone, Reader Service Manager [212] 997-6057

#### Classified and Employment Advertising

Frank Eberle, Manager [212] 997-2557 Mary Ellen Kearns, Sales Manager (212) 997-3306

#### Invitation

Exhibition of industrial electronics and electrical engineering

October 9–13, 1979

#### Basle/Switzerland

in the halls of the Swiss Industries Fair

Information and catalogue: Ineltec 79 CH-4021 Basle/Switzerland Telephone 061 262020 Telex 62685 fairs ch

Circle 241 on reader service card

The biggest problem with your IEEE bus...

So your new equipment conforms to IEEE standards. Great. But your system doesn't work. Not so great. Either your interface or your software isn't compatible. But which one?

Look no further. This is Model 488. The IEEE Bus Monitor/Analyzer from

Interface Technology.

It records, analyzes, and controls. It stimulates, calibrates, tests, and verifies. In short, it does the thinking—and the searching — for you.

Call today for a demonstration of this remarkable time saver. Now that you're on the bus, you don't want to miss

the boat.

...is finding why your bus has a problem.



# ATTACH GROUND-STRAP







#### IC INSERTION TOOL 36-40 PIN CMOS-SAFE

Unique new insertion too. Also aligns bentout pins. A twist of the handle compresses the pins to proper .600 inch spacing and locks the IC into the tool. Then simply place the tool on the socket and depress the plunger for instant and accurate insertion. Features heavy chrome plating throughout for reliable static dissipation. Includes terminal lug for attachment of ground strap.

MINIMUM BILLING \$25.00 ADD SHIPPING CHARGE \$1.00 NEW YORK STATE RESIDENTS ADD APPLICABLE TAX



OK MACHINE & TOOL CORPORATION 3455 CONNER ST., BRONX, N.Y. 10475 U.S.A. TELEX 125091

INSERT I.C. 4



"LOADED" P.C. BOARD

Circle 242 on reader service card

# Pilight CRTS

#### HIGH VOLTAGE FOR CRT APPLICATIONS

#### COMMERCIAL

2 to 30kV, 3 to 30 watts, high voltage power supplies. Custom flyback transformers.

#### MILITARY

Mil grade units for ground, ship and aircraft.

#### L.V. / H. V. COMBO'S

High voltage power supplies combined with a multiple output low voltage switcher.

#### SPECIALS


Miniature and sub-miniature high voltage power supplies to 20kV. Ultra stable or ultra low ripple designs.

Send for Data Package on standard product lines, or call Factory for technical assistance.

#### M-200 Series

#### MAJOR FEATURES:

Extremely Compact (≅ 16 - 24in³) designed to spec units for use in Military Aircraft . Fixed Anode Voltages to 22kV (@ 1mA) Adjustable Focus Voltages to 6kV (@ 500µA) ● Adjustable G1 Voltages to 1kV (@ 100µA) ● Operating Temperature -55°C to +95°C baseplate • Enclosures are custom designed for maximum use of available space and N.C. milled from solid aluminum stock.



PTK Corporation 1173 Los Olivos Avenue, Los Osos, CA 93402

(805) 528-5858

#### The Power Elite



ENI truly is the Power Elite. In fact, when you want the ultimate in power flexibility, there's simply nothing finer in all the world. And our instrumentation can meet all your application needs, for RF signal generator amplification, RFI/EMI testing, signal distribution, RF or data transmission, NMR/ENDOR, ultrasonics and more.

ENI's selection of Class A power amplifiers is unsurpassed, combining a frequency spectrum of 10 kHz to 1 GHz with power outputs that range from 300 milliwatts to over 4,000 watts. Rugged, compact and versatile, these power amplifiers can be driven by virtually any signal source. They're completely broadband and untuned, amplifying inputs of AM, FM, TV, SSB and pulse modulations with minimum distortion. The unconditional stability and failsafe design make them impervious to severe load conditions (open or

short circuit), delivering their rated power to any load, regardless of match.


Clearly, when it comes to meeting your power amplification needs, ENI is in a class by itself.

For detailed technical specifications, a demonstration or our latest full-line catalog, write: ENI, 3000 Winton Road South, Rochester, New York 14623. Call (716) 473-6900, or Telex 97-8283 ENI ROC.

ENI

The World's Leader in Power Amplifiers

Circle 901 on reader service card

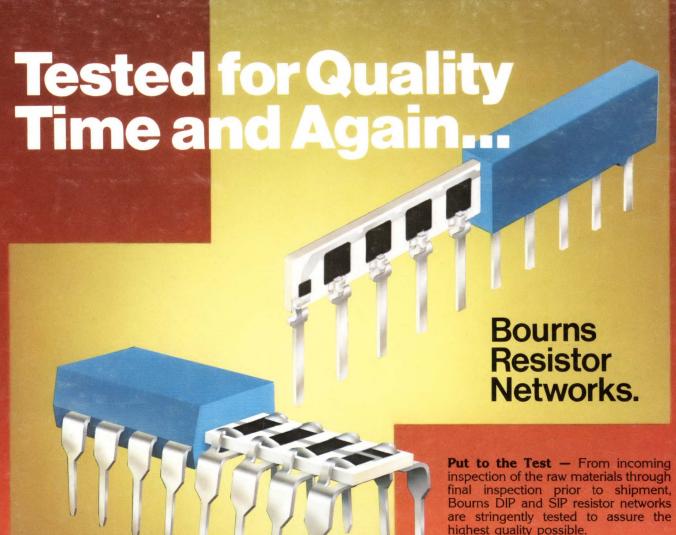

highest quality possible.

First article inspection is performed at every key manufacturing step. All parts are laser-trimmed to their cor-

rect value and then 100% inspected. Rejects are sorted out, eliminating many latent defects. Only parts passing inspection are assembled and then subjected to an additional 100% parametric test. This electrical test is followed by another QC inspection prior to shipment.

**Designed In Quality** — Inside and out, Bourns resistor networks are designed to deliver superior performance and trouble-free operation. Inside, the Bourns exclusive KRIMP-JOINT IM lead frame termination design provides both a mechanical and electrical bond that assures reliability. Outside, a proprietary molding technique eliminates the mold gate, resulting in a dimensionally stable, thermoset plastic package.

Auto-Insertion — Inserting molded Bourns DIP and SIP resistor networks is the same as inserting ICs. No changing of adjustments is necessary on the automatic insertion equipment.

**Superior Performance** — Bourns resistor networks offer superior load life, better thermal shock performance and lower, more uniform tempco.

Verified quality, competitive pricing, distributor availability, a broad line of both DIPs and SIPs, and excellent delivery. Put Bourns Resistor Networks to the test. Call or write today for your new catalog. Or, see the EEM directory (Volume 2, pages 3639 - 3645).

TRIMPOT PRODUCTS DIVISION, BOURNS, INC., 12155 Magnolia Avenue, Riverside, CA 92503. Phone: 714 781-5415. TWX: 910 332-1252

European Headquarters: Bourns AG, Zugerstrasse 74 6340 Baar, Switzerland. Phone: 042 33 33 33. Telex: 78722.

